


August 2009



MULTILAYER CERAMIC CAPACITORS



**SAMSUNG
ELECTRO-MECHANICS**

SAMSUNG



We, Samsung, declare that our component MLCC is produced in accordance with EU RoHS directive.

1. RoHS Compliance and restriction of Br

The following restricted materials are not used in packaging materials as well as products in compliance with the law and restriction.

- Cd, Pb, Hg, Cr+6, As, Br and the compounds, PCB, asbestos
- Bromic materials : PBBs, PBBOs, PBDO, PBDE, PBB

2. No use of materials breaking Ozone layer

The following ODS materials are not used in our fabrication process.

- ODS material : Freon, Haron, 1-1-1 TCE, CCl4, HCFC

If you want more detailed Information, Please Visit Samsung Electro-mechanics Website <http://www.sem.samsung.com>

Please, see the last page of this catalog for our environmental certification list.

CONTENTS

Part Numbering System	4	Part Numbering System
General Capacitors	6	General Capacitors
Ultra High Capacitors	28	Ultra High Capacitors
Super Small Capacitors	35	Super Small Capacitors
High Voltage Capacitors	39	High Voltage Capacitors
Camera Strobe Circuit Capacitors	50	Camera Strobe Circuit Capacitors
Array Type Capacitors	52	Array Type Capacitors
Low ESL Capacitors	55	Low ESL Capacitors
Reliability Test Condition	58	Reliability Test Condition
Premium Capacitors for Automotive Applications	62	Premium Capacitors for Automotive Applications
Packaging Specification	79	Packaging Specification
Application Manual for Surface Mounting	83	Application Manual for Surface Mounting

*Size tolerance				
Size Code	0201(0603)	0402(1005)	0603(1608)	0805(2012)
S	± 0.05	± 0.07	± 0.07	
Q	± 0.07	± 0.1	± 0.15	± 0.15
R	± 0.1	± 0.15	± 0.2	± 0.2

Class I (Temperature Compensation)

Symbol	EIA Code	Operation Temperature Range(°C)	Temperature Coefficient Range(ppm/°C)
C	C0G	-55 ~ +125	0 ±30
P	P2H	-55 ~ +125	-150 ±60
R	R2H	-55 ~ +125	-220 ±60
S	S2H	-55 ~ +125	-330 ±60
T	T2H	-55 ~ +125	-470 ±60
U	U2J	-55 ~ +125	-750 ±120
L	S2L	-55 ~ +125	-1000 ~ +350

★
Class II (High Dielectric Constant)

Symbol	EIA Code	Operation Temperature Range(°C)	Capacitance Change(ΔC %)
A	X5R	-55 ~ + 85	±15
B	X7R	-55 ~ +125	±15
X	X6S	-55 ~ +105	±22
F	Y5V	-30 ~ + 85	-82 ~ +22
Y	X7S	-55 ~ +125	±22

★★

Series	TC	Capacitance Step											
E-3	Y5V	1.0				2.2				4.7			
E-6	X5R X7R X6S	1.0		1.5		2.2		3.3		4.7		6.8	
E-12	C0G TC series	1.0	1.2	1.5	1.8	2.2	2.7	3.3	3.9	4.7	5.6	6.8	8.2


★★★

Size	Code	Thickness(mm)	Spec(mm)	Size	Code	Thickness(mm)	Spec(mm)
01005(0402)	2	0.20	±0.02	1210(3225)	H	1.60	±0.20
0201(0603)	3	0.30	±0.03		U	1.80	±0.20
0402(1005)	5	0.50	±0.05		I	2.00	±0.20
0603(1608)	5	0.50	+0.0/-0.1		J	2.50	±0.20
	8	0.80	±0.10		V	2.50	±0.30
0805(2012)	A	0.65	±0.10	1808(4520)	F	1.25	±0.20
	C	0.85	±0.10		H	1.60	±0.20
	D	1.00	±0.15		I	2.00	±0.20
	F	1.25	±0.10	1812(4532)	F	1.25	±0.20
	Q	1.25	±0.15		H	1.60	±0.20
1206(3216)	Y	1.25	±0.2		I	2.00	±0.20
	C	0.85	±0.15 *±0.10		J	2.50	±0.20
	D	1.00	±0.15		L	3.20	±0.30
	E	1.10	±0.10	2220(5750)	F	1.25	±0.20
	P	1.15	±0.10		H	1.60	±0.20
	F	1.25	±0.15		I	2.00	±0.20
1210(3225)	H	1.60	±0.20		J	2.50	±0.20
	C	0.85	±0.15 *±0.10		L	3.20	±0.30
	9	0.90	±0.10				
	M	1.15	±0.10				
	F	1.25	±0.20				
	S	1.35	±0.15				

■ * Mark is only applicable to "L" code, 12th code in part number.

Part Numbering
SystemGeneral
CapacitorsUltra High
CapacitorsSuper Small
CapacitorsHigh Voltage
CapacitorsCamera Strobe
Circuit CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

General Capacitors

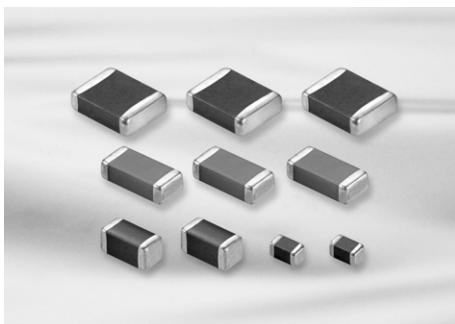


Feature

- Wide selection of size : from 0402 to 2220
- Highly reliable tolerance and high speed automatic chip placement on PCBs
- Wide capacitance range
- Wide temperature compensation and voltage range : from COG to Y5V and from 6.3V to 50V
- Highly reliable performance
- Highly resistant termination metal
- Tape & reel for surface mount assembly

Application

- HHP, DSC, DVC, LCD, TV, Car Navigation, Memory Module, PDA, Game Machine
- Tuner (Product code C is suitable.)
- ※ Medical, Aviation, Automobile device should be following a special specification.

Structure and Dimensions

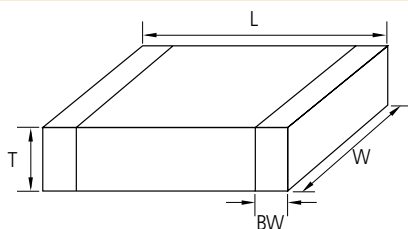

Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
05	0402	1.00 ± 0.05	0.50 ± 0.05	0.50 ± 0.05	5	$0.2+0.15/-0.1$
10	0603	1.60 ± 0.10	0.80 ± 0.10	$0.50+0.0/-0.1$	5	0.30 ± 0.20
				0.80 ± 0.10	8	
21	0805	2.00 ± 0.10	1.25 ± 0.10	0.85 ± 0.10	C	$0.5+0.2/-0.3$
				1.25 ± 0.10	F	
		2.00 ± 0.15	1.25 ± 0.15	1.25 ± 0.15	Q	
		2.00 ± 0.20	1.25 ± 0.20	1.25 ± 0.20	Y	
31	1206	3.20 ± 0.20	1.60 ± 0.20	0.60 ± 0.10	6	$0.50+0.30$
				0.85 ± 0.15	C	
				$0.85 \pm 0.10(*)$	P	
		3.20 ± 0.15	1.60 ± 0.15	1.15 ± 0.10	F	
				1.25 ± 0.15	H	
32	1210	3.20 ± 0.30	2.50 ± 0.20	1.60 ± 0.20	H	0.60 ± 0.30
				0.85 ± 0.15	C	
				$0.85 \pm 0.10(*)$	9	
				0.90 ± 0.10	H	
				1.60 ± 0.20	U	
				1.80 ± 0.20	I	
42	1808	4.50 ± 0.40	2.00 ± 0.20	2.00 ± 0.20	J	0.80 ± 0.30
43	1812	4.50 ± 0.40	3.20 ± 0.30	2.00 ± 0.20	L	0.80 ± 0.30
55	2220	5.70 ± 0.40	5.00 ± 0.40	3.20 ± 0.30	L	1.00 ± 0.30

■ Pd MLCC (12th code in part number of pd MLCC = A)

- Class I type
Capacitance < 10pF (Class I . 0402, 0603, 0805 case size)
Capacitance < 18pF (Class I . 1206 case size)

* Except the capacitance range mentioned as above, All other the capacitance range is using Ni inner electrode for Class I, Class II type(12th code in part number of Ni MLCC = N)

■ * Mark is only applicable to "L" code , 12th code in part number.

Capacitance Table (General Capacitors)

Size	0402(05)	0603(10)	0805(21)	1206(31)	1210(32)	1812(43)	2220(55)
TC	COG(C)						
Rated V	50(B)	50(B)	50(B)	25(A)	50(B)	50(B)	50(B)
Capacitance -pF- (part numbering code) and thickness -mm-							
0.2(0R2)							
0.5(0R5)							
1(010)							
10(100)							
12(120)							
18(180)							
22(220)							
33(330)							
39(390)							
47(470)	0.5 (5)						
56(560)							
100(101)							
150(151)							
180(181)							
220(221)							
270(271)							
330(331)							
390(391)							
470(471)							
560(561)			0.65 (A)				
680(681)							
820(821)							
1000(102)		0.8 (8)					
1200(122)							
1500(152)							
1800(182)							
2200(222)							
2700(272)							
3300(332)							
3900(392)							
4700(472)							
5600(562)			1.25 (F)				
6800(682)							
8200(822)							
10000(103)				1.25 (F)			
12000(123)							
15000(153)							
18000(183)					1.6 (H)		
22000(223)							
27000(273)							
33000(333)							
39000(393)							
43000(433)				1.6 (H)		2.0 (I)	
47000(473)							
56000(563)							
68000(683)							2.5 (J)
100000(104)						1.6 (H)	
120000(124)							2.5 (J)

 :X7R(B)
 :X5R(A)
 :Y5V(F)
 :COG(C)
 :X6S(X)

Part Numbering
SystemGeneral
CapacitorsUltra High
CapacitorsSuper Small
CapacitorsHigh Voltage
CapacitorsCamera Strobe
Circuit CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Capacitance Table (General Capacitors)

Size	0402(05)			0603(10)					0805(21)				
TC	U2J(U)/ S2L(L)	T2H(T)	R2H(R)	U2J(U)/ S2L(L)	T2H(T)	R2H(R)	S2H(S)	P2H(P)	U2J(U)/ S2L(L)	T2H(T)	R2H(R)	S2H(S)	P2H(P)
Rated V	50(B)												
Capacitance -pF- (part numbering code) and thickness -mm-													
0.5(0R5)													
1(010)													
10(100)													
12(120)													
15(150)													
18(180)													
22(220)													
27(270)													
33(330)	0.5 (5)	0.5 (5)	0.5 (5)										
39(390)													
47(470)													
56(560)							0.8 (8)	0.8 (8)					
68(680)													0.65 (A)
82(820)													
100(101)													
120(121)													
150(151)													
180(181)													
220(221)													
270(271)													
330(331)						0.8 (8)					0.65 (A)		
390(391)					0.8 (8)				0.65 (A)	0.65 (A)			
470(471)												0.65 (A)	
560(561)													
680(681)													
820(821)											0.85 (C)	0.85 (C)	0.85 (C)
1000(102)									0.85 (C)	0.85 (C)			
1200(122)													
1500(152)													

:X7R(B):X5R(A):Y5V(F):C0G(C):X6S(X)

 :X7R(B)
 :X5R(A)
 :Y5V(F)
 :C0G(C)
 :X6S(X)

Capacitance Table (General Capacitors)

Size	0402(05)						0603(10)				
TC	X7R(B) / X5R(A)) / X6S(X)										
Rated V	4(R)	6.3(Q)	10(P)	16(O)	25(A)	50(B)	6.3(Q)	10(P)	16(O)	25(A)	50(B)
Capacitance -nF- (part numbering code) and thickness -mm-											
0.10(101)											
0.15(151)											
0.22(221)											
0.33(331)											
0.47(471)											
0.68(681)											
1.0(102)						0.5 (5)					
1.5(152)											
2.2(222)											
3.3(332)											0.8 (8)
4.7(472)											
6.8(682)											
10(103)											
15(153)					0.5 (5)						
22(223)											
33(333)											
47(473)			0.5 (5)	0.5 (5)							
68(683)											
100(104)											
150(154)											
220(224)					0.5 (5)						
330(334)			0.5 (5)		0.5 (5)						
470(474)								0.8 (8)	0.8 (8)	0.8 (8)	
680(684)		0.5 (5)									
1000(105)		0.5 (5)	0.5 (5)				0.8 (8)				0.8 (8)
1500(155)									0.5 (5)	0.5 (5)	
2200(225)								0.8 (8)			
3300(335)										0.8 (8)	
4700(475)							0.8 (8)	0.5 (5)	0.8 (8)	0.8 (8)	
10000(106)	0.5 (5)						0.8 (8)				
22000(226)											

 :X7R(B)
 :X5R(A)
 :Y5V(F)
 :C0G(C)
 :X6S(X)

Part Numbering
SystemGeneral
CapacitorsUltra High
CapacitorsSuper Small
CapacitorsHigh Voltage
CapacitorsCamera Strobe
Circuit CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Capacitance Table (General Capacitors)

Size	0805(21)					
TC	X7R(B) / X5R(A) / X6S(X)					
Rated V	4(R)	6.3(Q)	10(P)	16(O)	25(A)	50(B)
Capacitance -nF- (part numbering code) and thickness -mm-						
0.15(151)						
0.22(221)						
0.33(331)						
0.47(471)						
0.68(681)						
1.0(102)						
1.5(152)						
2.2(222)						0.65 (A)
3.3(332)						
4.7(472)						
6.8(682)						
10(103)						
15(153)						
22(223)						
33(333)						
47(473)					0.65 (A)	
68(683)					0.85 (C)	0.85 (C)
100(104)				0.65 (A)		
150(154)				0.85 (C)		
220(224)			0.65 (A)			
330(334)			0.85 (C)			
390(394)				0.85 (C)	1.25 (F)	1.25 (F)
470(474)						
680(684)						
1000(105)			1.25 (F)	1.25 (F)	0.6 (6)	
1500(155)					0.85 (C)	
2200(225)						
3300(335)		1.25 (F)				
4700(475)						1.25 (Q)
6800(685)						
10000(106)	0.85 (C)	1.25 (Q)	0.85 (C)	1.25 (Y)	1.25 (Y)	
15000(156)		0.85 (C)				
22000(226)	0.85 (C)					
47000(476)	1.25 (Y)	1.25 (Y)				

 :X7R(B)
 :X5R(A)
 :Y5V(F)
 :C0G(C)
 :X6S(X)

Capacitance Table (General Capacitors)

Size	1206(31)							1210(32)				
TC	X7R(B) / X5R(A)) / X6S(X)											
Rated V	4(R)	6.3(Q)	10(P)	16(O)	25(A)	35(L)	50(B)	6.3(Q)	10(P)	16(O)	25(A)	50(B)
Capacitance -nF- (part numbering code) and thickness -mm-												
1.0(102)												
1.5(152)												
2.2(222)												
3.3(332)												
4.7(472)												
6.8(682)												
10(103)												
15(153)												
22(222)												
33(333)												
47(473)												
68(683)												
100(104)												
150(154)							0.85 (C)					
220(224)					0.85 (C)		1.25 (F)					
330(334)												
470(474)				0.85 (C)	1.25 (F)							1.25 (F)
680(684)							1.6 (H)					
1000(105)			0.85 (C)	1.25 (F)							1.25 (F)	1.6 (H)
1500(155)												2.0 (I)
2200(225)			1.25 (F)		1.6 (H)					1.25 (F)	2.0 (I)	2.5 (J)
3300(335)							1.6 (H)			1.6 (H)		
4700(475)			1.6 (H)	1.6 (H)	0.85 (C)					2.0 (I)	1.8 (U)	1.8 (U)
6800(685)		1.6 (H)							2.0 (I)	2.5 (J)	2.5 (J)	
10000(106)			0.85 (C)			1.6 (H)				0.85 (C)	0.9 (9)	1.8 (U)
22000(226)					1.6 (H)			2.5 (J)	2.5 (J)	2.5 (J)	2.5 (J)	
33000(336)			1.6 (H)					2.5 (J)				
47000(476)	1.6 (H)	1.6 (H)							2.5 (J)			
68000(686)								2.5 (V)				
100000(107)									2.5 (V)			
:X7R(B) :X5R(A) :Y5V(F) :C0G(C) :X6S(X)												

 :X7R(B)
 :X5R(A)
 :Y5V(F)
 :C0G(C)
 :X6S(X)

Part Numbering
SystemGeneral
CapacitorsUltra High
CapacitorsSuper Small
CapacitorsHigh Voltage
CapacitorsCamera Strobe
Circuit CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting



Capacitance Table (General Capacitors)

Size	1812(43)					2220(55)		
TC	X7R(B) / X5R(A)							
Rated V	6.3(Q)	10(P)	16(O)	25(A)	50(B)	6.3(Q)	10(P)	25(A)
Capacitance -nF- (part numbering code) and thickness -mm-								
10(103)					1.25 (F)			
1000(105)								
1500(155)								
2200(225)								
3300(335)								
4700(475)				2.5 (J)				
6800(685)								2.5 (J)
10000(106)				3.2 (L)				
15000(156)								
22000(226)		2.5 (J)						
33000(336)							2.5 (J)	
47000(476)	2.5 (J)							
100000(107)	3.2 (L)					2.5 (J)		

Size	0402(05)					0603(10)			
TC	Y5V(F)								
Rated V	6.3(Q)	10(P)	16(O)	25(A)	50(B)	6.3(Q)	10(P)	16(O)	50(B)
Capacitance -nF- (part numbering code) and thickness -mm-									
2.2(222)					0.50 (5)				
4.7(472)									
10(103)									
15(153)									0.80 (8)
22(223)				0.50 (5)					
47(473)			0.50 (5)						
100(104)									
220(224)									
470(474)		0.50 (5)							
1000(105)	0.50 (5)							0.80 (8)	
2200(225)							0.80 (8)		
4700(475)						0.80 (8)			

■ :X7R(B) ■ :X5R(A) ■ :Y5V(F) ■ :C0G(C) ■ :X6S(X)

Capacitance Table (General Capacitors)

Size	0805(21)				1206(31)				
TC	Y5V(F)								
Rated V	10(P)	16(O)	25(A)	50(B)	10(P)	16(O)	25(A)	50(B)	
Capacitance -nF- (part numbering code) and thickness -mm-									
2.2(222)				0.65 (A)					
4.7(472)									
10(103)									
22(223)									
47(473)									
100(104)									
220(224)			0.65 (A)	1.25 (F)				0.85 (C)	
470(474)		0.65 (A)	0.85 (C)						
1000(105)		0.85 (C)					0.85 (C)		1.25 (F)
2200(225)		1.25 (F)	1.25 (F)			0.85 (C)	1.25 (F)		
4700(475)						1.25 (F)			
10000(106)	1.25 (F)					1.6 (H)			
22000(226)					1.6 (H)				

Part Numbering
SystemGeneral
CapacitorsUltra High
CapacitorsSuper Small
CapacitorsHigh Voltage
CapacitorsCamera Strobe
Circuit CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Size	1210(32)			1812(43)		2220(55)
TC	Y5V(F)					
Rated V	10(P)	25(A)	35(L)	16(O)	50(B)	10(P)
Capacitance -nF- (part numbering code) and thickness -mm-						
10(103)						
22(223)						
47(473)						
100(104)						
220(224)						
470(474)						
1000(105)						
2200(225)						
4700(475)		1.6 (H)	1.6 (H)			
10000(106)					2.5 (J)	
22000(226)	2.5 (J)			2.0 (I)		
47000(476)						2.5 (J)
100000(107)						

:X7R(B) :X5R(A) :Y5V(F) :C0G(C) :X6S(X)

Product Line Up (General Capacitors)

Part Number	Size L×W (1.0×0.5mm)							Capacitance (pF)	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
	C	P	R	S	T	U	L				
	C0G	P2H	R2H	S2H	T2H	U2J	S2L				
CL05○0R2CB5ANN □	●				●	●		0.20	±0.25pF	50	0.55
CL05○0R5CB5ANN □	●				●	●		0.50	±0.25pF	50	0.55
CL05○0R8CB5ANN □	●				●	●		0.80	±0.25pF	50	0.55
CL05○0R82CB5ANN □	●				●	●		0.82	±0.25pF	50	0.55
CL05○0R9CB5ANN □	●				●	●		0.90	±0.25pF	50	0.55
CL05○010CB5ANN □	●				●	●		1.00	±0.25pF	50	0.55
CL05○1R2CB5ANN □	●				●	●		1.20	±0.25pF	50	0.55
CL05○1R5CB5ANN □	●				●	●		1.50	±0.25pF	50	0.55
CL05○1R8CB5ANN □	●				●	●		1.80	±0.25pF	50	0.55
CL05○020CB5ANN □	●				●	●		2.00	±0.25pF	50	0.55
CL05○2R2CB5ANN □	●				●	●		2.20	±0.25pF	50	0.55
CL05○2R7CB5ANN □	●				●	●		2.70	±0.25pF	50	0.55
CL05○030CB5ANN □	●				●	●		3.00	±0.25pF	50	0.55
CL05○3R3CB5ANN □	●				●	●		3.30	±0.25pF	50	0.55
CL05○3R9CB5ANN □	●				●	●		3.90	±0.25pF	50	0.55
CL05○040CB5ANN □	●				●	●		4.00	±0.25pF	50	0.55
CL05○4R7CB5ANN □	●				●	●		4.70	±0.25pF	50	0.55
CL05○050DB5ANN □	●				●	●		5.00	±0.5pF	50	0.55
CL05○5R6DB5ANN □	●				●	●		5.60	±0.5pF	50	0.55
CL05○060DB5ANN □	●				●	●		6.00	±0.5pF	50	0.55
CL05○6R8DB5ANN □	●				●	●		6.80	±0.5pF	50	0.55
CL05○070DB5ANN □	●				●	●		7.00	±0.5pF	50	0.55
CL05○080DB5ANN □	●				●	●		8.00	±0.5pF	50	0.55
CL05○8R2DB5ANN □	●				●	●		8.20	±0.5pF	50	0.55
CL05○090DB5ANN □	●				●	●		9.00	±0.5pF	50	0.55
CL05○100JB5NNN □	●							10	±5%	50	0.55
CL05○120JB5NNN □	●							12	±5%	50	0.55
CL05○120JB5ANN □					●	●		12	±5%	50	0.55
CL05○150JB5NNN □	●							15	±5%	50	0.55
CL05○180JB5NNN □	●							18	±5%	50	0.55
CL05○220JB5NNN □	●							22	±5%	50	0.55
CL05○270JB5NNN □	●							27	±5%	50	0.55
CL05○270JB5ANN □					●	●		27	±5%	50	0.55
CL05○330JB5NNN □	●							33	±5%	50	0.55
CL05○330JB5ANN □					●	●		33	±5%	50	0.55

※○mark means temperature characteristic code. The parts with mark ●are available to produce.

※□mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Product Line Up (General Capacitors)

Part Number	Size L × W (1.0 × 0.5mm)							Capacitance (pF)	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
	C	P	R	S	T	U	L				
	C0G	P2H	R2H	S2H	T2H	U2J	S2L				
CL05 ○ 390JB5NNN □	●							39	±5%	50	0.55
CL05 ○ 390JB5ANN □					●	●		39	±5%	50	0.55
CL05 ○ 470JB5NNN □	●							47	±5%	50	0.55
CL05 ○ 470JB5ANN □					●	●		47	±5%	50	0.55
CL05 ○ 560JB5NNN □	●							56	±5%	50	0.55
CL05 ○ 560JB5ANN □					●	●		56	±5%	50	0.55
CL05 ○ 680JB5NNN □	●							68	±5%	50	0.55
CL05 ○ 680JB5ANN □					●	●		68	±5%	50	0.55
CL05 ○ 820JB5NNN □	●							82	±5%	50	0.55
CL05 ○ 820JB5ANN □						●		82	±5%	50	0.55
CL05 ○ 101JB5NNN □	●							100	±5%	50	0.55
CL05 ○ 101JB5ANN □						●		100	±5%	50	0.55
CL05 ○ 121JB5NNN □	●							120	±5%	50	0.55
CL05 ○ 151JB5NNN □	●							150	±5%	50	0.55
CL05 ○ 151JB5ANN □						●		150	±5%	50	0.55
CL05 ○ 181JB5NNN □	●							180	±5%	50	0.55
CL05 ○ 221JB5NNN □	●							220	±5%	50	0.55
CL05 ○ 271JB5NNN □	●							270	±5%	50	0.55
CL05 ○ 331JB5NNN □	●							330	±5%	50	0.55
CL05 ○ 471JB5NNN □	●							470	±5%	50	0.55

Part Numbering System

General Capacitors

Ultra High Capacitors

Super Small Capacitors

High Voltage Capacitors

Camera Strobe Circuit Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

Part Number	Size L × W (1.6 × 0.8mm)							Capacitance (pF)	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
	C	P	R	S	T	U	L				
	C0G	P2H	R2H	S2H	T2H	U2J	S2L				
CL10 ○ 0R2CB8ANN □	●		●	●	●	●	●	0.20	±0.25pF	50	0.90
CL10 ○ 0R3CB8ANN □	●		●	●	●	●	●	0.30	±0.25pF	50	0.90
CL10 ○ 0R4CB8ANN □	●		●	●	●	●	●	0.40	±0.25pF	50	0.90
CL10 ○ R47CB8ANN □	●		●	●	●	●	●	0.47	±0.25pF	50	0.90
CL10 ○ 0R5CB8ANN □	●		●	●	●	●	●	0.50	±0.25pF	50	0.90
CL10 ○ R56CB8ANN □	●		●	●	●	●	●	0.56	±0.25pF	50	0.90
CL10 ○ R68CB8ANN □	●		●	●	●	●	●	0.68	±0.25pF	50	0.90
CL10 ○ 0R7CB8ANN □	●		●	●	●	●	●	0.70	±0.25pF	50	0.90
CL10 ○ 0R8CB8ANN □	●		●	●	●	●	●	0.80	±0.25pF	50	0.90

※ ○ mark means temperature characteristic code. The parts with mark ● are available to produce.

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Product Line Up (General Capacitors)

Part Number	Size L×W (1.6×0.8mm)							Capacitance (pF)	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
	C	P	R	S	T	U	L				
	C0G	P2H	R2H	S2H	T2H	U2J	S2L				
CL10○R82CB8ANN □	●		●	●	●	●	●	0.82	±0.25pF	50	0.90
CL10○010CB8ANN □	●		●	●	●	●	●	1.00	±0.25pF	50	0.90
CL10○1R2CB8ANN □	●		●	●	●	●	●	1.20	±0.25pF	50	0.90
CL10○1R5CB8ANN □	●		●	●	●	●	●	1.50	±0.25pF	50	0.90
CL10○1R8CB8ANN □	●		●	●	●	●	●	1.80	±0.25pF	50	0.90
CL10○020CB8ANN □	●		●	●	●	●	●	2.00	±0.25pF	50	0.90
CL10○2R2CB8ANN □	●		●	●	●	●	●	2.20	±0.25pF	50	0.90
CL10○2R7CB8ANN □	●		●	●	●	●	●	2.70	±0.25pF	50	0.90
CL10○030CB8ANN □	●		●	●	●	●	●	3.00	±0.25pF	50	0.90
CL10○3R3CB8ANN □	●		●	●	●	●	●	3.30	±0.25pF	50	0.90
CL10○3R9CB8ANN □	●		●	●	●	●	●	3.90	±0.25pF	50	0.90
CL10○040CB8ANN □	●		●	●	●	●	●	4.00	±0.25pF	50	0.90
CL10○4R7CB8ANN □	●		●	●	●	●	●	4.70	±0.25pF	50	0.90
CL10○050DB8ANN □	●		●	●	●	●	●	5.00	±0.5pF	50	0.90
CL10○5R6DB8ANN □	●		●	●	●	●	●	5.60	±0.5pF	50	0.90
CL10○060DB8ANN □	●		●	●	●	●	●	6.00	±0.5pF	50	0.90
CL10○6R8DB8ANN □	●		●	●	●	●	●	6.80	±0.5pF	50	0.90
CL10○070DB8ANN □	●		●	●	●	●	●	7.00	±0.5pF	50	0.90
CL10○080DB8ANN □	●		●	●	●	●	●	8.00	±0.5pF	50	0.90
CL10○8R2DB8ANN □	●		●	●	●	●	●	8.20	±0.5pF	50	0.90
CL10○090DB8ANN □	●		●	●	●	●	●	9.00	±0.5pF	50	0.90
CL10○100JB8NNN □	●							10	±5%	50	0.90
CL10○100JB8ANN □			●	●	●	●	●	10	±5%	50	0.90
CL10○120JB8NNN □	●							12	±5%	50	0.90
CL10○120JB8ANN □			●	●	●	●	●	12	±5%	50	0.90
CL10○150JB8NNN □	●							15	±5%	50	0.90
CL10○150JB8ANN □			●	●	●	●	●	15	±5%	50	0.90
CL10○180JB8NNN □	●							18	±5%	50	0.90
CL10○180JB8ANN □			●	●	●	●	●	18	±5%	50	0.90
CL10○220JB8NNN □	●							22	±5%	50	0.90
CL10○220JB8ANN □			●	●	●	●	●	22	±5%	50	0.90
CL10○270JB8NNN □	●							27	±5%	50	0.90
CL10○270JB8ANN □			●		●	●	●	27	±5%	50	0.90
CL10○330JB8NNN □	●							33	±5%	50	0.90
CL10○330JB8ANN □			●		●	●	●	33	±5%	50	0.90

※○mark means temperature characteristic code. The parts with mark ●are available to produce.

※□mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Product Line Up (General Capacitors)

Part Number	Size L × W (1.6 × 0.8mm)							Capacitance (pF)	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
	C C0G	P P2H	R R2H	S S2H	T T2H	U U2J	L S2L				
CL10○390JB8NNN □	●							39	±5%	50	0.90
CL10○390JB8ANN □			●		●	●	●	39	±5%	50	0.90
CL10○470JB8NNN □	●							47	±5%	50	0.90
CL10○470JB8ANN □			●		●	●	●	47	±5%	50	0.90
CL10○560JB8NNN □	●							56	±5%	50	0.90
CL10○560JB8ANN □			●		●	●		56	±5%	50	0.90
CL10○680JB8NNN □	●							68	±5%	50	0.90
CL10○680JB8ANN □			●		●	●		68	±5%	50	0.90
CL10○820JB8NNN □	●							82	±5%	50	0.90
CL10○820JB8ANN □			●		●	●		82	±5%	50	0.90
CL10○101JB8NNN □	●							100	±5%	50	0.90
CL10○101JB8ANN □			●		●	●		100	±5%	50	0.90
CL10○121JB8NNN □	●							120	±5%	50	0.90
CL10○121JB8ANN □			●		●	●		120	±5%	50	0.90
CL10○151JB8NNN □	●							150	±5%	50	0.90
CL10○151JB8ANN □			●		●	●		150	±5%	50	0.90
CL10○181JB8NNN □	●							180	±5%	50	0.90
CL10○181JB8ANN □			●		●	●		180	±5%	50	0.90
CL10○221JB8NNN □	●							220	±5%	50	0.90
CL10○221JB8ANN □					●	●		220	±5%	50	0.90
CL10○271JB8NNN □	●							270	±5%	50	0.90
CL10○271JB8ANN □					●	●		270	±5%	50	0.90
CL10○331JB8NNN □	●							330	±5%	50	0.90
CL10○331JB8ANN □					●	●		330	±5%	50	0.90
CL10○391JB8NNN □	●							390	±5%	50	0.90
CL10○471JB8NNN □	●							470	±5%	50	0.90
CL10○471JB8ANN □						●		470	±5%	50	0.90
CL10○561JB8NNN □	●							560	±5%	50	0.90
CL10○681JB8NNN □	●							680	±5%	50	0.90
CL10○681JB8ANN □						●		680	±5%	50	0.90
CL10○821JB8NNN □	●							820	±5%	50	0.90
CL10○102JB8NNN □	●							1000	±5%	50	0.90
CL10○122JB8NNN □	●							1200	±5%	50	0.90
CL10○222JB8NNN □	●							2200	±5%	50	0.90
CL10○332JA8NNN □	●							3300	±5%	25	0.90

※ ○ mark means temperature characteristic code. The parts with mark ● are available to produce.

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Part Numbering
SystemGeneral
CapacitorsUltra High
CapacitorsSuper Small
CapacitorsHigh Voltage
CapacitorsCamera Strobe
Circuit CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Product Line Up (General Capacitors)

Part Number	Size L×W (2.0×1.25mm)							Capacitance (pF)	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
	C	P	R	S	T	U	L				
	C0G	P2H	R2H	S2H	T2H	U2J	S2L				
CL21○R47CBAANN□	●	●	●	●	●	●	●	0.47	±0.25pF	50	0.75
CL21○0R5CBAANN□	●	●	●	●	●	●	●	0.50	±0.25pF	50	0.75
CL21○R68CBAANN□	●	●	●	●	●	●	●	0.68	±0.25pF	50	0.75
CL21○R82CBAANN□	●	●	●	●	●	●	●	0.82	±0.25pF	50	0.75
CL21○010CBAANN□	●	●	●	●	●	●	●	1.00	±0.25pF	50	0.75
CL21○1R2CBAANN□	●	●	●	●	●	●	●	1.20	±0.25pF	50	0.75
CL21○1R5CBAANN□	●	●	●	●	●	●	●	1.50	±0.25pF	50	0.75
CL21○1R8CBAANN□	●	●	●	●	●	●	●	1.80	±0.25pF	50	0.75
CL21○020CBAANN□	●	●	●	●	●	●	●	2.00	±0.25pF	50	0.75
CL21○2R2CBAANN□	●	●	●	●	●	●	●	2.20	±0.25pF	50	0.75
CL21○2R7CBAANN□	●	●	●	●	●	●	●	2.70	±0.25pF	50	0.75
CL21○030CBAANN□	●	●	●	●	●	●	●	3.00	±0.25pF	50	0.75
CL21○3R3CBAANN□	●	●	●	●	●	●	●	3.30	±0.25pF	50	0.75
CL21○3R9CBAANN□	●	●	●	●	●	●	●	3.90	±0.25pF	50	0.75
CL21○040CBAANN□	●	●	●	●	●	●	●	4.00	±0.25pF	50	0.75
CL21○4R7CBAANN□	●	●	●	●	●	●	●	4.70	±0.25pF	50	0.75
CL21○050DBAANN□	●	●	●	●	●	●	●	5.00	±0.5pF	50	0.75
CL21○5R6DBAANN□	●	●	●	●	●	●	●	5.60	±0.5pF	50	0.75
CL21○060DBAANN□	●	●	●	●	●	●	●	6.00	±0.5pF	50	0.75
CL21○6R8DBAANN□	●	●	●	●	●	●	●	6.80	±0.5pF	50	0.75
CL21○070DBAANN□	●	●	●	●	●	●	●	7.00	±0.5pF	50	0.75
CL21○080DBAANN□	●	●	●	●	●	●	●	8.00	±0.5pF	50	0.75
CL21○8R2DBAANN□	●	●	●	●	●	●	●	8.20	±0.5pF	50	0.75
CL21○090DBAANN□	●	●	●	●	●	●	●	9.00	±0.5pF	50	0.75
CL21○100JBANNN□	●							10	±5%	50	0.75
CL21○100JBAANN□			●	●	●	●	●	10	±5%	50	0.75
CL21○120JBANNN□	●							12	±5%	50	0.75
CL21○120JBAANN□			●	●	●	●	●	12	±5%	50	0.75
CL21○150JBANNN□	●							15	±5%	50	0.75
CL21○180JBANNN□	●							18	±5%	50	0.75
CL21○220JBANNN□	●							22	±5%	50	0.75
CL21○270JBANNN□	●							27	±5%	50	0.75
CL21○330JBANNN□	●							33	±5%	50	0.75
CL21○390JBANNN□	●							39	±5%	50	0.75
CL21○470JBANNN□	●							47	±5%	50	0.75

※○mark means temperature characteristic code. The parts with mark ●are available to produce.

※□mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Product Line Up (General Capacitors)

Part Number	Size L × W (2.0 × 1.25mm)							Capacitance (pF)	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
	C C0G	P P2H	R R2H	S S2H	T T2H	U U2J	L S2L				
CL21 ○ 560JBANNN □	●							56	±5%	50	0.75
CL21 ○ 680JBANNN □	●							68	±5%	50	0.75
CL21 ○ 820JBANNN □	●							82	±5%	50	0.75
CL21 ○ 101JBANNN □	●							100	±5%	50	0.75
CL21 ○ 101JBAANN □			●	●	●	●	●	100	±5%	50	0.75
CL21 ○ 121JBANNN □	●							120	±5%	50	0.75
CL21 ○ 151JBANNN □	●							150	±5%	50	0.75
CL21 ○ 181JBANNN □	●							180	±5%	50	0.75
CL21 ○ 221JBANNN □	●							220	±5%	50	0.75
CL21 ○ 271JBANNN □	●							270	±5%	50	0.75
CL21 ○ 331JBANNN □	●							330	±5%	50	0.75
CL21 ○ 331JBAANN □			●	●	●	●	●	330	±5%	50	0.75
CL21 ○ 391JBANNN □	●							390	±5%	50	0.75
CL21 ○ 471JBANNN □	●							470	±5%	50	0.75
CL21 ○ 471JBAANN □			●	●	●	●	●	470	±5%	50	0.75
CL21 ○ 561JBANNN □	●							560	±5%	50	0.75
CL21 ○ 821JBCNNN □	●							820	±5%	50	0.95
CL21 ○ 821JBAANN □			●	●	●	●	●	820	±5%	50	0.75
CL21 ○ 102JBCNNN □	●							1000	±5%	50	0.95
CL21 ○ 122JBFNNN □	●							1200	±5%	50	1.35
CL21 ○ 152JBFNNN □	●							1500	±5%	50	1.35
CL21 ○ 182JBFNNN □	●							1800	±5%	50	1.35
CL21 ○ 222JBFNNN □	●							2200	±5%	50	1.35
CL21 ○ 332JAFNNN □	●							3300	±5%	25	1.35
CL21 ○ 332JBFNNN □	●							3300	±5%	50	1.35
CL21 ○ 392JBFNNN □	●							3900	±5%	50	1.35
CL21 ○ 472JAFNNN □	●							4700	±5%	25	1.35
CL21 ○ 472JBFNNN □	●							4700	±5%	50	1.35
CL21 ○ 562JBFNNN □	●							5600	±5%	50	1.35
CL21 ○ 103JBFNNN □	●							10000	±5%	50	1.35

※ ○ mark means temperature characteristic code. The parts with mark ● are available to produce.

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Part Numbering
SystemGeneral
CapacitorsUltra High
CapacitorsSuper Small
CapacitorsHigh Voltage
CapacitorsCamera Strobe
Circuit CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Product Line Up (General Capacitors)

Part Number	Size L×W (3.2×1.6(2.5)mm)							Capacitance (pF)	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
	C	P	R	S	T	U	L				
	C0G	P2H	R2H	S2H	T2H	U2J	S2L				
CL31 ○ 122JBCNNN □	●							1200	±5%	50	0.75
CL31 ○ 152JBCNNN □	●							1500	±5%	50	0.75
CL31 ○ 182JBCNNN □	●							1800	±5%	50	0.75
CL31 ○ 222JBCNNN □	●							2200	±5%	50	0.75
CL31 ○ 472JBFNNN □	●							4700	±5%	50	1.35
CL31 ○ 562JBHNNN □	●							5600	±5%	50	1.80
CL31 ○ 682JBHNNN □	●							6800	±5%	50	1.80
CL31 ○ 103JAFNNN □	●							10000	±5%	25	1.35
CL32 ○ 103JBFNNN □	●							10000	±5%	50	1.35

Part Number	Size L×W (1.0×0.5mm)			Capacitance	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
	A	B	F				
	X5R(EIA)	X7R(EIA)	Y5V(EIA)				
CL05 ○ 221KB5NNN □		●		0.22nF	±10%	50	0.55
CL05 ○ 331KB5NNN □		●		0.33nF	±10%	50	0.55
CL05 ○ 471KB5NNN □		●		0.47nF	±10%	50	0.55
CL05 ○ 681KB5NNN □		●		0.68nF	±10%	50	0.55
CL05 ○ 102KB5NNN □		●		1.0nF	±10%	50	0.55
CL05 ○ 152KB5NNN □		●		1.5nF	±10%	50	0.55
CL05 ○ 222KB5NNN □		●		2.2nF	±10%	50	0.55
CL05 ○ 332KB5NNN □		●		3.3nF	±10%	50	0.55
CL05 ○ 472KB5NNN □		●		4.7nF	±10%	50	0.55
CL05 ○ 682KB5NNN □		●		6.8nF	±10%	50	0.55
CL05 ○ 103KB5NNN □		●		10nF	±10%	50	0.55
CL05 ○ 103ZB5NNN □			●	10nF	+80%~-20%	50	0.55
CL05 ○ 153ZB5NNN □			●	15nF	+80%~-20%	50	0.55
CL05 ○ 102KA5NNN □		●		1nF	±10%	25	0.55
CL05 ○ 222KA5NNN □		●		2.2nF	±10%	25	0.55
CL05 ○ 332KA5NNN □		●		3.3nF	±10%	25	0.55
CL05 ○ 472KA5NNN □		●		4.7nF	±10%	25	0.55
CL05 ○ 682KA5NNN □		●		6.8nF	±10%	25	0.55
CL05 ○ 103KA5NNN □		●		10nF	±10%	25	0.55

※ ○ mark means temperature characteristic code. The parts with mark ● are available to produce.

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Product Line Up (General Capacitors)

Part Number	Size L × W (1.0 × 0.5mm)			Capacitance	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
	A	B	F				
	X5R(EIA)	X7R(EIA)	Y5V(EIA)				
CL05 ○ 153KA5NNN □		●		15nF	±10%	25	0.55
CL05 ○ 223KA5NNN □		●		22nF	±10%	25	0.55
CL05 ○ 223ZA5NNN □			●	22nF	+80%~-20%	25	0.55
CL05 ○ 333ZA5NNN □			●	33nF	+80%~-20%	25	0.55
CL05 ○ 104KA5NNN □	●			100nF	±10%	25	0.55
CL05 ○ 102KO5NNN □		●		1.0nF	±10%	16	0.55
CL05 ○ 472KO5NNN □		●		4.7nF	±10%	16	0.55
CL05 ○ 682KO5NNN □		●	●	6.8nF	±10%	16	0.55
CL05 ○ 103KO5NNN □		●		10nF	±10%	16	0.55
CL05 ○ 103ZO5NNN □			●	10nF	+80%~-20%	16	0.55
CL05 ○ 153KO5NNN □		●		15nF	±10%	16	0.55
CL05 ○ 223KO5NNN □		●		22nF	±10%	16	0.55
CL05 ○ 223ZO5NNN □			●	22nF	+80%~-20%	16	0.55
CL05 ○ 333KO5NNN □		●		33nF	±10%	16	0.55
CL05 ○ 473KO5NNN □		●		47nF	±10%	16	0.55
CL05 ○ 473ZO5NNN □			●	47nF	+80%~-20%	16	0.55
CL05 ○ 683KO5NNN □		●		68nF	±10%	16	0.55
CL05 ○ 104KO5NNN □	●	●		100nF	±10%	16	0.55
CL05 ○ 104ZO5NNN □			●	100nF	+80%~-20%	16	0.55
CL05 ○ 224ZO5NNN □			●	220nF	+80%~-20%	16	0.55
CL05 ○ 103KP5NNN □		●		10nF	±10%	10	0.55
CL05 ○ 333KP5NNN □		●		33nF	±10%	10	0.55
CL05 ○ 473KP5NNN □	●	●		47nF	±10%	10	0.55
CL05 ○ 683KP5NNN □		●		68nF	±10%	10	0.55
CL05 ○ 104KP5NNN □	●	●		100nF	±10%	10	0.55
CL05 ○ 224ZP5NNN □			●	220nF	+80%~-20%	10	0.55
CL05 ○ 474ZP5NNN □			●	470nF	+80%~-20%	10	0.55
CL05 ○ 104KQ5NNN □	●	●		100nF	±10%	6.3	0.55
CL05 ○ 154KQ5NNN □	●			150nF	±10%	6.3	0.55
CL05 ○ 474KQ5NNN □			●	470nF	+80%~-20%	6.3	0.55

※ ○ mark means temperature characteristic code. The parts with mark ● are available to produce.

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Part Numbering System

General Capacitors

Ultra High Capacitors

Super Small Capacitors

High Voltage Capacitors

Camera Strobe Circuit Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

Product Line Up (General Capacitors)

Part Number	Size L × W (1.6 × 0.8mm)			Capacitance	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
	A	B	F				
	X5R(EIA)	X7R(EIA)	Y5V(EIA)				
CL10 ○ 101KB8NNN □		●		0.10nF	± 10%	50	0.90
CL10 ○ 151KB8NNN □		●		0.15nF	± 10%	50	0.90
CL10 ○ 221KB8NNN □		●		0.22nF	± 10%	50	0.90
CL10 ○ 331KB8NNN □		●		0.33nF	± 10%	50	0.90
CL10 ○ 471KB8NNN □		●		0.47nF	± 10%	50	0.90
CL10 ○ 681KB8NNN □		●		0.68nF	± 10%	50	0.90
CL10 ○ 102KB8NNN □		●		1.0nF	± 10%	50	0.90
CL10 ○ 152KB8NNN □		●		1.5nF	± 10%	50	0.90
CL10 ○ 222KB8NNN □		●		2.2nF	± 10%	50	0.90
CL10 ○ 332KB8NNN □		●		3.3nF	± 10%	50	0.90
CL10 ○ 472KB8NNN □		●		4.7nF	± 10%	50	0.90
CL10 ○ 682KB8NNN □		●		6.8nF	± 10%	50	0.90
CL10 ○ 103KB8NNN □		●		10nF	± 10%	50	0.90
CL10 ○ 103ZB8NNN □			●	10nF	+80%~-20%	50	0.90
CL10 ○ 153KB8NNN □		●		15nF	± 10%	50	0.90
CL10 ○ 223KB8NNN □		●		22nF	± 10%	50	0.90
CL10 ○ 223ZB8NNN □			●	22nF	+80%~-20%	50	0.90
CL10 ○ 333KB8NNN □		●		33nF	± 10%	50	0.90
CL10 ○ 473KB8NNN □		●		47nF	± 10%	50	0.90
CL10 ○ 473ZB8NNN □			●	47nF	+80%~-20%	50	0.90
CL10 ○ 683KB8NNN □		●		68nF	± 10%	50	0.90
CL10 ○ 104KB8NNN □		●		100nF	± 10%	50	0.90
CL10 ○ 104ZB8NNN □			●	100nF	+80%~-20%	50	0.90
CL10 ○ 224ZB8NNN □			●	220nF	+80%~-20%	50	0.90
CL10 ○ 474ZB8NNN □			●	470nF	+80%~-20%	50	0.90
CL10 ○ 102KA8NNN □		●		1.0nF	± 10%	25	0.90
CL10 ○ 472KA8NNN □		●		4.7nF	± 10%	25	0.90
CL10 ○ 682KA8NNN □		●		6.8nF	± 10%	25	0.90
CL10 ○ 103KA8NNN □		●		10nF	± 10%	25	0.90
CL10 ○ 153KA8NNN □		●		15nF	± 10%	25	0.90
CL10 ○ 223KA8NNN □		●		22nF	± 10%	25	0.90
CL10 ○ 223ZA8NNN □			●	22nF	+80%~-20%	25	0.90
CL10 ○ 333KA8NNN □		●		33nF	± 10%	25	0.90
CL10 ○ 473KA8NNN □		●		47nF	± 10%	25	0.90
CL10 ○ 473ZA8NNN □			●	47nF	+80%~-20%	25	0.90

※ ○ mark means temperature characteristic code. The parts with mark ● are available to produce.

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Product Line Up (General Capacitors)

Part Number	Size L × W (1.6 × 0.8mm)			Capacitance	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
	A	B	F				
	X5R(EIA)	X7R(EIA)	Y5V(EIA)				
CL10 ○ 683KA8NNN □		●		68nF	±10%	25	0.90
CL10 ○ 104KA8NNN □		●		100nF	±10%	25	0.90
CL10 ○ 104ZA8NNN □			●	100nF	+80%~-20%	25	0.90
CL10 ○ 224KA8NNN □	●			220nF	±10%	25	0.90
CL10 ○ 224ZA8NNN □			●	220nF	+80%~-20%	25	0.90
CL10 ○ 334KA8NNN □	●			330nF	±10%	25	0.90
CL10 ○ 474ZA8NNN □			●	470nF	+80%~-20%	25	0.90
CL10 ○ 105KA8NNN □		●		1.0nF	±10%	25	0.90
CL10 ○ 102KO8NNN □		●		1.0nF	±10%	16	0.90
CL10 ○ 103KO8NNN □		●		10nF	±10%	16	0.90
CL10 ○ 153KO8NNN □		●		15nF	±10%	16	0.90
CL10 ○ 223KO8NNN □		●		22nF	±10%	16	0.90
CL10 ○ 333KO8NNN □		●		33nF	±10%	16	0.90
CL10 ○ 473KO8NNN □		●	●	47nF	±10%	16	0.90
CL10 ○ 473ZO8NNN □			●	47nF	+80%~-20%	16	0.90
CL10 ○ 683KO8NNN □		●		68nF	±10%	16	0.90
CL10 ○ 104KO8NNN □		●	●	100nF	±10%	16	0.90
CL10 ○ 104ZO8NNN □			●	100nF	+80%~-20%	16	0.90
CL10 ○ 154KO8NNN □		●		150nF	±10%	16	0.90
CL10 ○ 224KO8NNN □		●		220nF	±10%	16	0.90
CL10 ○ 224ZO8NNN □			●	220nF	+80%~-20%	16	0.90
CL10 ○ 334KO8NNN □		●		330nF	±10%	16	0.90
CL10 ○ 474KO8NNN □		●		470nF	±10%	16	0.90
CL10 ○ 474ZO8NNN □			●	470nF	+80%~-20%	16	0.90
CL10 ○ 105KO8NNN □		●		1.0μF	±10%	16	0.90
CL10 ○ 105ZO8NNN □			●	1.0μF	+80%~-20%	16	0.90
CL10 ○ 154KP8NNN □		●		150nF	±10%	10	0.90
CL10 ○ 224KP8NNN □	●	●		220nF	±10%	10	0.90
CL10 ○ 334KP8NNN □		●		330nF	±10%	10	0.90
CL10 ○ 474KP8NNN □		●		470nF	±10%	10	0.90
CL10 ○ 474ZP8NNN □			●	470nF	+80%~-20%	10	0.90
CL10 ○ 105ZP8NNN □			●	1.0μF	+80%~-20%	10	0.90
CL10 ○ 474KQ8NNN □		●		470nF	±10%	6.3	0.90
CL10 ○ 684KQ8NNN □		●		680	±10%	6.3	0.90
CL10 ○ 105KQ8NNN □		●		1.0μF	±10%	6.3	0.90
CL10 ○ 225KQ8NNN □		●		2.2μF	±10%	6.3	0.90

※ ○ mark means temperature characteristic code. The parts with mark ● are available to produce.

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Part Numbering
SystemGeneral
CapacitorsUltra High
CapacitorsSuper Small
CapacitorsHigh Voltage
CapacitorsCamera Strobe
Circuit CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Product Line Up (General Capacitors)

Part Number	Size L×W (2.0×1.25mm)			Capacitance	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
	A	B	F				
	X5R(EIA)	X7R(EIA)	Y5V(EIA)				
CL21○151KBANNN □		●		0.15nF	±10%	50	0.75
CL21○221KBANNN □		●		0.22nF	±10%	50	0.75
CL21○331KBANNN □		●		0.33nF	±10%	50	0.75
CL21○471KBANNN □		●		0.47nF	±10%	50	0.75
CL21○681KBANNN □		●		0.68nF	±10%	50	0.75
CL21○102KBANNN □		●		1.0nF	±10%	50	0.75
CL21○152KBANNN □		●		1.5nF	±10%	50	0.75
CL21○222KBANNN □		●		2.2nF	±10%	50	0.75
CL21○332KBANNN □		●		3.3nF	±10%	50	0.75
CL21○332KBCNNN □		●		3.3nF	±10%	50	0.95
CL21○472KBANNN □		●		4.7nF	±10%	50	0.75
CL21○682KBANNN □		●		6.8nF	±10%	50	0.75
CL21○103KBANNN □		●		10nF	±10%	50	0.75
CL21○103KBCNNN □		●		10nF	±10%	50	0.95
CL21○103ZBANNN □			●	10nF	+80%~-20%	50	0.75
CL21○153KBANNN □		●		15nF	±10%	50	0.75
CL21○223KBANNN □		●		22nF	±10%	50	0.75
CL21○223ZBANNN □			●	22nF	+80%~-20%	50	0.75
CL21○333KBANNN □		●		33nF	±10%	50	0.75
CL21○473ZBANNN □			●	47nF	+80%~-20%	50	0.75
CL21○683KBCNNN □		●		68nF	±10%	50	0.95
CL21○104KBCNNN □		●		100nF	±10%	50	0.95
CL21○104ZBANNN □			●	100nF	+80%~-20%	50	0.75
CL21○104ZBCNNN □			●	100nF	+80%~-20%	50	0.95
CL21○154KBFNNN □		●		150nF	±10%	50	1.35
CL21○224KBFNNN □		●		220nF	±10%	50	1.35
CL21○224ZBCNNN □			●	220nF	+80%~-20%	50	0.95
CL21○474ZBFNNN □			●	470nF	+80%~-20%	50	1.35
CL21○105KBFNNN □		●		1.0μF	±10%	50	1.35
CL21○105ZBFNNN □			●	1.0μF	+80%~-20%	50	1.35
CL21○102KAANNN □		●		1.0nF	±10%	25	0.75
CL21○103KAANNN □		●		10nF	±10%	25	0.75
CL21○473KAANNN □		●		47nF	±10%	25	0.75
CL21○683KAANNN □		●		68nF	±10%	25	0.75
CL21○104KACNNN □		●		100nF	±10%	25	0.95
CL21○104ZAANNN □			●	100nF	+80%~-20%	25	0.75

※ ○ mark means temperature characteristic code. The parts with mark ● are available to produce.

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Product Line Up (General Capacitors)

Part Number	Size L × W (2.0 × 1.25mm)			Capacitance	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
	A	B	F				
	X5R(EIA)	X7R(EIA)	Y5V(EIA)				
CL21 ○ 154KAFNNN □		●		150nF	±10%	25	1.35
CL21 ○ 224KAFNNN □		●		220nF	±10%	25	1.35
CL21 ○ 224ZAANNN □			●	220nF	+80%~-20%	25	0.75
CL21 ○ 334KAFNNN □		●		330nF	±10%	25	1.35
CL21 ○ 474KAFNNN □		●		470nF	±10%	25	1.35
CL21 ○ 474ZACNNN □			●	470nF	+80%~-20%	25	0.95
CL21 ○ 105KAFNNN □		●		1.0μF	±10%	25	1.35
CL21 ○ 105ZAFNNN □			●	1.0μF	+80%~-20%	25	1.35
CL21 ○ 225ZAFNNN □			●	2.2μF	+80%~-20%	25	1.35
CL21 ○ 153KOANNN □		●		15nF	±10%	16	0.75
CL21 ○ 333KOANNN □		●		33nF	±10%	16	0.75
CL21 ○ 104KOANNN □		●		100nF	±10%	16	0.75
CL21 ○ 104ZOANNN □			●	100nF	+80%~-20%	16	0.75
CL21 ○ 154KOANNN □		●		150nF	±10%	16	0.75
CL21 ○ 224KOCNNN □		●		220nF	±10%	16	0.95
CL21 ○ 224ZOANNN □			●	220nF	+80%~-20%	16	0.75
CL21 ○ 334KOCNNN □		●		330nF	±10%	16	0.95
CL21 ○ 474KOFNNN □		●		470nF	±10%	16	1.35
CL21 ○ 474ZOANNN □			●	470nF	+80%~-20%	16	0.75
CL21 ○ 474ZOCNNN □			●	470nF	+80%~-20%	16	0.95
CL21 ○ 684KOFNNN □		●		680nF	±10%	16	1.35
CL21 ○ 105KOFNNN □		●		1.0μF	±10%	16	1.35
CL21 ○ 105ZOCNNN □			●	1.0μF	+80%~-20%	16	0.95
CL21 ○ 105ZOFNNN □			●	1.0μF	+80%~-20%	16	1.35
CL21 ○ 225ZOFNNN □			●	2.2μF	+80%~-20%	16	1.35
CL21 ○ 475ZOFNNN □			●	4.7μF	+80%~-20%	16	1.35
CL21 ○ 474KPCNNN □		●		470nF	±10%	10	0.95
CL21 ○ 684KPFNNN □		●		680nF	±10%	10	1.35
CL21 ○ 105KPFNNN □		●		1.0μF	±10%	10	1.35
CL21 ○ 225ZPFNNN □			●	2.2μF	+80%~-20%	10	1.35
CL21 ○ 475ZPFNNN □			●	4.7μF	+80%~-20%	10	1.35

※ ○ mark means temperature characteristic code. The parts with mark ● are available to produce.

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Part Numbering System

General Capacitors

Ultra High Capacitors

Super Small Capacitors

High Voltage Capacitors

Camera Strobe Circuit Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

Product Line Up (General Capacitors)

Part Number	Size L × W (3.2 × 1.6mm)			Capacitance	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
	A	B	F				
	X5R(EIA)	X7R(EIA)	Y5V(EIA)				
CL31 ○ 154KBCNNN □		●		150nF	± 10%	50	1.00
CL31 ○ 334KBFNNN □		●		330nF	± 10%	50	1.40
CL31 ○ 474KBHNNN □		●		470nF	± 10%	50	1.8
CL31 ○ 474ZBCNNN □			●	470nF	+80%~-20%	50	1.00
CL31 ○ 684KBHNNN □		●		680nF	± 10%	50	1.8
CL31 ○ 105KBHNNN □		●		1.0μF	± 10%	50	1.8
CL31 ○ 105ZBFNNN □			●	1.0μF	+80%~-20%	50	1.40
CL31 ○ 225KBHNNN □	●			2.2μF	± 10%	50	1.8
CL31 ○ 104KACNNN □		●		100nF	± 10%	25	1.00
CL31 ○ 154KACNNN □		●		150nF	± 10%	25	1.00
CL31 ○ 224KACNNN □		●		220nF	± 10%	25	1.00
CL31 ○ 334KACNNN □		●		330nF	± 10%	25	1.00
CL31 ○ 684KAHNNN □		●		680nF	± 10%	25	1.8
CL31 ○ 105KAPNNN □		●		1.0μF	± 10%	25	1.25
CL31 ○ 105KAHNNN □		●		1.0μF	± 10%	25	1.8
CL31 ○ 105ZACNNN □			●	1.0μF	+80%~-20%	25	1.00
CL31 ○ 225KAHNNN □	●	●		2.2μF	± 10%	25	1.8
CL31 ○ 225ZAFNNN □			●	2.2μF	+80%~-20%	25	1.40
CL31 ○ 334KOCNNN □		●		330nF	± 10%	16	1.00
CL31 ○ 474KOCNNN □		●		470nF	± 10%	16	1.00
CL31 ○ 684KOCNNN □		●		680nF	± 10%	16	1.00
CL31 ○ 105ZOCNNN □			●	1.0μF	+80%~-20%	16	1.00
CL31 ○ 155KOFNNN □		●		1.5μF	± 10%	16	1.40
CL31 ○ 225KOHNNN □		●		2.2μF	± 10%	16	1.8
CL31 ○ 225ZOCNNN □			●	2.2μF	+80%~-20%	16	1.00
CL31 ○ 335KOCLNN □	●			3.3μF	± 10%	16	0.95
CL31 ○ 335KOHNNN □	●	●		3.3μF	± 10%	16	1.8
CL31 ○ 475ZOENNN □			●	4.7μF	+80%~-20%	16	1.25
CL31 ○ 475ZOFNNN □			●	4.7μF	+80%~-20%	16	1.40
CL31 ○ 106ZOHNNN □			●	10μF	+80%~-20%	16	1.8
CL31 ○ 105KPCNNN □		●		1.0μF	± 10%	10	1.00
CL31 ○ 225KPENNN □		●		2.2μF	± 10%	10	1.25
CL31 ○ 475KPHNNN □		●		4.7μF	± 10%	10	1.8
CL31 ○ 106ZPENNN □			●	10μF	+80%~-20%	10	1.25
CL31 ○ 106ZPFNNN □			●	10μF	+80%~-20%	10	1.40
CL31 ○ 685KQHNNN □		●		6.8μF	± 10%	6.3	1.8
CL31 ○ 106KQHNNN □		●		10μF	± 10%	6.3	1.8

※ ○ mark means temperature characteristic code. The parts with mark ● are available to produce.

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Product Line Up (General Capacitors)

Part Number	Size L × W (3.2 × 2.5mm)			Capacitance	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
	A	B	F				
	X5R(EIA)	X7R(EIA)	Y5V(EIA)				
CL32 ○ 474KBFNNN □		●		470nF	±10%	50	1.45
CL32B475KB UYNN □		●		4.7μF	±10%	50	2.00
CL32 ○ 105KBHNNN □		●		1.0μF	±10%	50	1.80
CL32 ○ 225KBJNNN □		●		2.2μF	±10%	50	2.70
CL32 ○ 475KB UYNN □		●		4.7μF	±10%	50	2.00
CL32 ○ 475KLULNN □	●			4.7μF	±10%	35	2.00
CL32 ○ 106KLULNN □	●			10μF	±10%	35	2.00
CL32 ○ 106ZLHNNN □			●	10μF	+80%~-20%	35	1.80
CL32 ○ 105KAFNNN □		●		1.0μF	±10%	25	1.45
CL32 ○ 225KANNNN □		●		2.2μF	±10%	25	2.20
CL32 ○ 475KAULNN □	●			4.7μF	±10%	25	2.00
CL32 ○ 475KA INNN □	●			4.7μF	±10%	25	2.20
CL32 ○ 475ZAHNNN □			●	4.7μF	+80%~-20%	25	1.80
CL32 ○ 106KA9LNN □	●			10μF	±10%	25	1.00
CL32 ○ 106KATLNN □	●			10μF	±10%	25	1.70
CL32 ○ 106KA ULNN □	●			10μF	±10%	25	2.00
CL32 ○ 106KAJNNN □		●		10μF	±10%	25	2.70
CL32 ○ 106KAJSNN □		●		10μF	±10%	25	2.70
CL32 ○ 106ZAHNNN □			●	10μF	+80%~-20%	25	1.80
CL32 ○ 106ZASLNN □			●	10μF	+80%~-20%	25	1.50
CL32 ○ 475KO INNN □		●		4.7μF	±10%	16	2.20
CL32 ○ 475ZO9LNN □			●	4.7μF	+80%~-20%	16	1.00
CL32 ○ 475ZOFNNN □			●	4.7μF	+80%~-20%	16	1.45
CL32 ○ 106KOC LNN □	●			10μF	±10%	16	0.95
CL32 ○ 106KO9LNN □	●			10μF	±10%	16	1.00
CL32 ○ 106KOMLNN □	●			10μF	±10%	16	1.25
CL32 ○ 106KOTLNN □	●			10μF	±10%	16	1.70
CL32 ○ 106KOJNNN □	●	●		10μF	±10%	16	2.70
CL32 ○ 106ZOELNN □			●	10μF	+80%~-20%	16	1.20
CL32 ○ 106ZOHNNN □			●	10μF	+80%~-20%	16	1.80
CL32 ○ 106ZOMLNN □			●	10	+80%~-20%	16	1.25
CL32 ○ 106KP INNN □	●	●		10μF	±10%	10	2.20

Part Number	Size L × W (4.5 × 3.2mm)			Capacitance	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
	A	B	F				
	X5R(EIA)	X7R(EIA)	Y5V(EIA)				
CL43 ○ 684KBFNNN □		●		680nF	±10%	50	1.45
CL43 ○ 105KBFNNN □		●		1μF	±10%	50	1.45
CL43 ○ 106KALNNN □		●		10μF	±10%	25	3.40

Part Number	Size L × W (5.7 × 5.0mm)			Capacitance	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
	A	B	F				
	X5R(EIA)	X7R(EIA)	Y5V(EIA)				
CL55 ○ 105KB INNN □		●		1μF	±10%	50	2.20
CL55 ○ 476KPJNNN □	●			47μF	±10%	10	2.70
CL55 ○ 107KQJNNN □	●			100μF	±10%	6.3	2.70
CL55 ○ 107ZPJNNN □			●	100μF	+80%~-20%	10	2.70

※ ○ mark means temperature characteristic code. The parts with mark ● are available to produce.

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Part Numbering System

General Capacitors

Ultra High Capacitors

Super Small Capacitors

High Voltage Capacitors

Camera Strobe Circuit Capacitors

Array Type Capacitors

Low ESL Capacitors


Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

Ultra High Capacitors

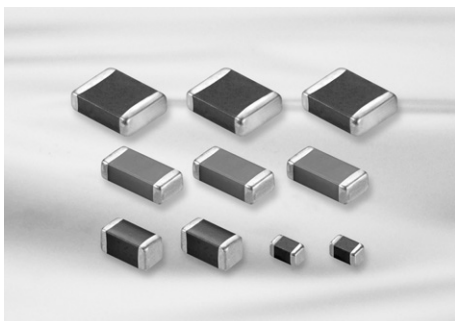


Feature

- Wide selection of size : from 0402 to 1812
- Highly reliable tolerance and high speed automatic chip placement on PCBs
- Wide capacitance range
- Highly reliable performance
- Highly resistant termination metal
- Tape & reel for surface mount assembly

Application

- Desktop PC, Note PC, HHP, DC-DC Converter, DSC
 - LCD TV, LCD Monitor
- ※ For using special purpose like Military, Medical, Aviation, Automobile device should be following a special specification.

Structure and Dimensions

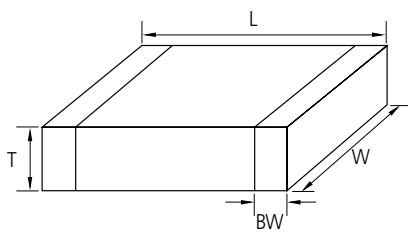

Size Code	EIA Code	Dimension(mm)				
		L	W	T	Thickness Code	BW
05	0402	1.00 ± 0.05	0.50 ± 0.05	0.50 ± 0.05	5	$0.2+0.15/-0.1$
10	0603	1.60 ± 0.10	0.80 ± 0.10	0.50 ± 0.05	5	0.30 ± 0.20
				0.80 ± 0.10	8	
21	0805	2.00 ± 0.10	1.25 ± 0.10	0.85 ± 0.10	C	$0.5+0.2/-0.3$
				1.25 ± 0.10	F	
		2.00 ± 0.15	1.25 ± 0.15	1.25 ± 0.15	Q	
		2.00 ± 0.20	1.25 ± 0.20	1.25 ± 0.20	Y	
31	1206	3.20 ± 0.20	1.60 ± 0.20	0.60 ± 0.10	6	$0.50+0.30$
				0.85 ± 0.10	C	
				1.15 ± 0.10	P	
		3.20 ± 0.15	1.60 ± 0.15	1.25 ± 0.15	F	
32	1210	3.20 ± 0.30	2.50 ± 0.20	1.60 ± 0.20	H	0.60 ± 0.30
				0.85 ± 0.10	C	
				0.90 ± 0.10	9	
				1.60 ± 0.20	H	
				1.80 ± 0.20	U	
				2.00 ± 0.20	I	
42	1808	4.50 ± 0.40	2.00 ± 0.20	2.50 ± 0.30	v	0.80 ± 0.30
				2.00 ± 0.20	I	
				2.00 ± 0.20	L	
43	1812	4.50 ± 0.40	3.20 ± 0.30	3.20 ± 0.30	L	0.80 ± 0.30

Capacitance Table (Ultra High Capacitors)

Size	0402(05)					0603(10)					
TC	X5R(A)										
Rated V	4(R)	6.3(Q)	10(P)	16(O)	25(A)	4(R)	6.3(Q)	10(P)	16(O)	25(A)	50(B)
Capacitance -nF- (part numbering code) and thickness -mm-											
0.10(101)											
0.15(151)											
0.22(221)											
0.33(331)											
0.47(471)											
0.68(681)											
1.0(102)											
1.5(152)											
2.2(222)											
3.3(332)											
4.7(472)											
6.8(682)											
10(103)											
15(153)											
22(223)											
33(333)											
47(473)											
68(683)											
100(104)											
150(154)											
220(224)		0.5 (5)	0.5 (5)								
330(334)											
470(474)											
680(684)		0.5 (5)	0.5 (5)								
1000(105)				0.5 (5)	0.5 (5)						
1500(155)											
2200(225)	0.5 (5)										
3300(335)											
4700(475)											
10000(106)						0.8 (8)	0.8 (8)	0.5 (5)	0.5 (5)	0.8 (8)	0.5 (5)
22000(226)											

:X7R(B)
 :X5R(A)
 :Y5V(F)
 :C0G(C)
 :X6S(X)

Part Numbering
SystemGeneral
CapacitorsUltra High
CapacitorsSuper Small
CapacitorsHigh Voltage
CapacitorsCamera Strobe
Circuit CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting



Capacitance Table (Ultra High Capacitors)

Size	0805(21)						1206(31)				1210(32)					1812(43)	
TC	X5R(A)																
Rated V	4(R)	6.3(Q)	10(P)	16(O)	25(A)	50(B)	6.3(Q)	10(P)	16(O)	25(A)	50(B)	6.3(Q)	10(P)	16(O)	25(A)	50(B)	6.3(Q)
Capacitance -nF- (part numbering code) and thickness -mm-																	
0.15(151)																	
0.22(221)																	
0.33(331)																	
0.47(471)																	
0.68(681)																	
1.0(102)																	
1.5(152)																	
2.2(222)																	
3.3(332)																	
4.7(472)																	
6.8(682)																	
10(103)																	
15(153)																	
22(223)																	
33(333)																	
47(473)																	
68(683)																	
100(104)																	
150(154)																	
220(224)																	
330(334)																	
390(394)																	
470(474)																	
680(684)																	
1000(105)				0.6 (6)													
1500(155)																	
2200(225)						0.85 (C)											
3300(335)					0.85 (C)												
4700(475)							1.25 (Q)										
6800(685)		0.85 (C)	0.85 (C)							0.85 (C)							
10000(106)		0.85 (C)			1.25 (Y)			0.85 (C)	0.85 (C)	0.85 (C)	1.6 (H)					1.8 (U)	
15000(156)										1.6 (H)							
22000(226)	0.85 (C)							1.6 (H)				2.5 (J)	2.5 (J)	2.5 (J)	2.5 (J)		
47000(476)	1.25 (Y)	1.25 (Y)						1.6 (H)									2.5 (J)
68000(686)												2.5 (V)					
100000(107)													2.5 (V)				3.2 (L)
:X7R(B) :X5R(A) :Y5V(F) :C0G(C) :X6S(X)																	

Capacitance Table (Ultra High Capacitors)

Size	0402(05)		0603(10)		0805(21)				
TC	X7R(B) / X6S(X)								
Rated V	6.3(Q)	10(P)	4(R)	6.3(Q)	4(R)	6.3(Q)	10(P)	16(O)	25(A)
Capacitance -nF- (part numbering code) and thickness -mm-									
2.2(222)									
4.7(472)									
10(103)									
22(223)									
47(473)									
100(104)									
220(224)									
470(474)									
1000(105)	0.5 (5)	0.5 (5)		0.8 (8)					
2200(225)				0.8 (8)		1.25 (F)	1.25 (F)		
4700(475)			0.8 (8)			1.25 (Q)	0.85 (C)		
10000(106)					0.85 (C)	1.25 (Q)		1.25 (Y)	1.25 (Y)
22000(226)					1.25 (Y)				
47000(476)									
100000(107)									

Part Numbering
SystemGeneral
CapacitorsUltra High
CapacitorsSuper Small
CapacitorsHigh Voltage
CapacitorsCamera Strobe
Circuit CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Size	1206(31)				1210(32)			0402(05)	0603(10)	0805(21)	1206(31)	1210(32)	
TC	X7R(B) / X6S(X)							Y5V(F)					
Rated V	6.3(Q)	16(O)	25(A)	35(L)	6.3(Q)	10(P)	25(A)	6.3(Q)	6.3(Q)	10(P)	10(P)	6.3(Q)	10(P)
Capacitance -nF- (part numbering code) and thickness -mm-													
2.2(222)													
4.7(472)													
10(103)													
22(223)													
47(473)													
100(104)													
220(224)													
470(474)													
1000(105)								0.50 (5)					
2200(225)										0.80 (5)			
4700(475)		1.6 (H)	1.6 (H)						0.80 (5)				
10000(106)	1.6 (H)	1.6 (H)		1.6 (H)	1.6 (H)						1.25 (F)		
22000(226)						2.5 (J)		2.5 (J)				1.6 (H)	2.5 (J)
47000(476)							2.5 (J)						
100000(107)													

 :X7R(B)
 :X5R(A)
 :Y5V(F)
 :C0G(C)
 :X6S(X)

Product Line Up (Ultra High Capacitors)

Part Number	TC Code	Temperature Characteristics	Size L×W (mm)	Capacitance	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
CL10A105KB8NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60×0.80	1.0μF	± 10%	50	0.90
CL21A475KBQNNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00×1.25	4.7μF	± 10%	50	1.40
CL31A106KBHNNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20×1.60	10μF	± 10%	50	1.80
CL32A106KBULNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20×2.50	10μF	± 10%	50	2.00
CL05A334KA5NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.00×0.50	0.33μF	± 10%	25	0.55
CL10A474KA8NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60×0.80	0.47μF	± 10%	25	0.90
CL05A105KA5NQNN □	X5R(EIA)	± 15%(-55~+85℃)	1.00×0.50	1.0μF	± 10%	25	0.55
CL10A105KA5NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60×0.80	1.0μF	± 10%	25	0.55
CL21A105KACLNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00×1.25	1.0μF	± 10%	25	0.95
CL21A105KAFNNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00×1.25	1.0μF	± 10%	25	1.35
CL10A225KA5LNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60×0.80	2.2μF	± 10%	25	0.55
CL21A225KACLNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00×1.25	2.2μF	± 10%	25	0.95
CL21A225KAFNNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00×1.25	2.2μF	± 10%	25	1.35
CL21A475KACLNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00×1.25	4.7μF	± 10%	25	0.95
CL31A475KACLNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20×1.60	4.7μF	± 10%	25	0.95
CL31A475KAPLNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20×1.60	4.7μF	± 10%	25	1.25
CL31A475KAHNNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20×1.60	4.7μF	± 10%	25	1.80
CL21A106KAYNNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00×1.25	10μF	± 10%	25	1.45
CL31A106KACLNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20×1.60	10μF	± 10%	25	0.95
CL31A106KAHNNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20×1.60	10μF	± 10%	25	1.80
CL31A226KAHNNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20×1.60	22μF	± 10%	25	1.80
CL32A226KAJNNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20×2.50	22μF	± 10%	25	2.70
CL10A474KO8NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60×0.80	0.47μF	± 10%	16	0.90
CL05A105KO5NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.00×0.50	1.0μF	± 10%	16	0.55
CL10A105KO5LNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60×0.80	1.0μF	± 10%	16	0.55
CL10A105KO8NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60×0.80	1.0μF	± 10%	16	0.90
CL21A105KO6LNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00×1.25	1.0μF	± 10%	16	0.70
CL21A105KOFNNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00×1.25	1.0μF	± 10%	16	1.35
CL10A225KO5LNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60×0.80	2.2μF	± 10%	16	0.55
CL10A225KO8NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60×0.80	2.2μF	± 10%	16	0.90
CL21A225KOFNNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00×1.25	2.2μF	± 10%	16	1.35
CL10A475KO8NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60×0.80	4.7μF	± 10%	16	0.90
CL21A475KOFNNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00×1.25	4.7μF	± 10%	16	1.35
CL31A475KOCLNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20×1.60	4.7μF	± 10%	16	0.95
CL31A475KOHNNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20×1.60	4.7μF	± 10%	16	1.80
CL10A106MO8NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60×0.80	10μF	± 10%	16	0.90
CL21A106KOCLNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00×1.25	10μF	± 10%	16	0.95
CL21A106KOQNNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00×1.25	10μF	± 10%	16	1.40
CL31A106KOCLNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20×1.60	10μF	± 10%	16	0.95
CL31A106KOHNNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20×1.60	10μF	± 10%	16	1.80
CL31A226KOCLNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20×1.60	22μF	± 10%	16	0.95
CL32A226KOJNNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20×2.50	22μF	± 10%	16	2.70
CL05A224KP5NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.00×0.50	0.22μF	± 10%	10	0.55
CL05A474KP5NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.00×0.50	0.47μF	± 10%	10	0.55
CL10A684KP8NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60×0.80	0.68μF	± 10%	10	0.90
CL05A105KP5NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.00×0.50	1.0μF	± 10%	10	0.55
CL21A105KPFNNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00×1.25	1.0μF	± 10%	10	1.35
CL05A225MP5NSN □	X5R(EIA)	± 15%(-55~+85℃)	1.00×0.50	2.2μF	± 20%	10	0.55

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Product Line Up (Ultra High Capacitors)

Part Number	TC Code	Temperature Characteristics	Size L × W (mm)	Capacitance	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
CL10A225KP8NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60 × 0.80	2.2μF	± 10%	10	0.90
CL21A225KPENNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00 × 1.25	2.2μF	± 10%	10	1.20
CL21A225KPFNNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00 × 1.25	2.2μF	± 10%	10	1.35
CL10A475KP5LNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60 × 0.80	4.7μF	± 10%	10	0.55
CL10A475KP8NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60 × 0.80	4.7μF	± 10%	10	0.90
CL21A475KPCLNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00 × 1.25	4.7μF	± 10%	10	0.95
CL21A475KPFNNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00 × 1.25	4.7μF	± 10%	10	1.35
CL31A475KP6LNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20 × 1.60	4.7μF	± 10%	10	0.70
CL10A106KP8NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60 × 0.80	10μF	± 10%	10	0.90
CL21A106KPCLQN □	X5R(EIA)	± 15%(-55~+85℃)	2.00 × 1.25	10μF	± 10%	10	0.95
CL21A106KPFNNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00 × 1.25	10μF	± 10%	10	1.35
CL31A106KPPLNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20 × 1.60	10μF	± 10%	10	1.25
CL31A106KPHNNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20 × 1.60	10μF	± 10%	10	1.80
CL21A226MPCLRN □	X5R(EIA)	± 15%(-55~+85℃)	2.00 × 1.25	22μF	± 10%	10	0.95
CL31A106KPCLNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20 × 1.60	22μF	± 10%	10	0.95
CL31A226KPHNNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20 × 1.60	22μF	± 10%	10	1.80
CL31A476MPHNNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60 × 0.80	47μF	± 20%	10	1.80
CL32A107MPVNNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20 × 2.50	100μF	± 20%	10	2.80
CL32A226KPJNNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20 × 2.50	22μF	± 10%	10	2.70
CL05A224KQ5NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.00 × 0.50	0.22μF	± 10%	6.3	0.55
CL05A334KQ5NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.00 × 0.50	0.33μF	± 10%	6.3	0.55
CL05A474KQ5NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.00 × 0.50	0.47μF	± 10%	6.3	0.55
CL05A105KQ5NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.00 × 0.50	1.0μF	± 10%	6.3	0.55
CL05A225MQ5NSN □	X5R(EIA)	± 15%(-55~+85℃)	1.00 × 0.50	2.2μF	± 20%	6.3	0.57
CL10A225KQ5LNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60 × 0.80	2.2μF	± 10%	6.3	0.55
CL10A225KQ8NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60 × 0.80	2.2μF	± 10%	6.3	0.90
CL10A335KQ8NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60 × 0.80	3.3μF	± 10%	6.3	0.90
CL05A475MQ5NRN □	X5R(EIA)	± 15%(-55~+85℃)	1.00 × 0.50	4.7μF	± 20%	6.3	0.65
CL10A475KQ5LNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60 × 0.80	4.7μF	± 10%	6.3	0.55
CL10A475KQ8NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60 × 0.80	4.7μF	± 10%	6.3	0.90
CL21A475KQCLNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00 × 1.25	4.7μF	± 10%	6.3	0.95
CL21A475KQFNNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00 × 1.25	4.7μF	± 10%	6.3	1.35
CL10A106KQ8NNN □	X5R(EIA)	± 15%(-55~+85℃)	1.60 × 0.80	10μF	± 10%	6.3	0.90
CL21A106KQCLNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00 × 1.25	10μF	± 10%	6.3	0.95
CL21A106KQFNNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00 × 1.25	10μF	± 10%	6.3	1.35
CL31A106KQHNNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20 × 1.60	10μF	± 10%	6.3	1.80
CL31A156KQHNNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20 × 1.60	15μF	± 10%	6.3	1.80
CL10A226MQ8NRN □	X5R(EIA)	± 15%(-55~+85℃)	1.60 × 0.80	22μF	± 20%	6.3	1.00
CL21A226MQCLRN □	X5R(EIA)	± 15%(-55~+85℃)	2.00 × 1.25	22μF	± 20%	6.3	0.95
CL21A226MQQNNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00 × 1.25	22μF	± 20%	6.3	1.40
CL31A226KQHNNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20 × 1.60	22μF	± 10%	6.3	1.80
CL32A226MQCLNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20 × 2.50	22μF	± 20%	6.3	0.95
CL32A226KQJNNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20 × 2.50	22μF	± 10%	6.3	2.70
CL21A476MQYNNN □	X5R(EIA)	± 15%(-55~+85℃)	2.00 × 1.25	47μF	± 20%	6.3	1.45
CL31A476MQHNNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20 × 1.60	47μF	± 20%	6.3	1.80
CL32A476MQJNNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20 × 2.50	47μF	± 20%	6.3	2.70
CL43A476MQJNNN □	X5R(EIA)	± 15%(-55~+85℃)	4.50 × 3.20	47μF	± 20%	6.3	2.70
CL32A107MQVNNN □	X5R(EIA)	± 15%(-55~+85℃)	3.20 × 2.50	100μF	± 20%	6.3	2.80

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Part Numbering System

General Capacitors

Ultra High Capacitors

Super Small Capacitors

High Voltage Capacitors

Camera Strobe Circuit Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting


Product Line Up (Ultra High Capacitors)

Part Number	TC Code	Temperature Characteristics	Size L×W (mm)	Capacitance	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
CL43A107KQLNNN □	X5R(EIA)	±15%(-55~+85℃)	4.50×3.20	100μF	±20%	6.3	3.50
CL05A225MR5NNN □	X5R(EIA)	±15%(-55~+85℃)	1.00×0.50	2.2μF	±20%	4	0.55
CL05A106MR5NNN □	X5R(EIA)	±15%(-55~+85℃)	1.00×0.50	10μF	±20%	4	0.65
CL10A106KR8NNN □	X5R(EIA)	±15%(-55~+85℃)	1.60×0.80	10μF	±10%	4	0.90
CL10A226MR8NNN □	X5R(EIA)	±15%(-55~+85℃)	1.60×0.80	22μF	±20%	4	0.95
CL21A476MRYNNN □	X5R(EIA)	±15%(-55~+85℃)	2.00×1.25	47μF	±20%	4	1.45
CL31X476MRHNNN □	X6S(EIA)	-22%(-55~+105℃)	3.20×1.60	47μF	±20%	4	1.80
CL21X106KAYNNN □	X6S(EIA)	±22%(-55~+105℃)	2.00×1.25	10μF	±10%	25	1.45
CL31X106KAHNNN □	X6S(EIA)	±22%(-55~+105℃)	3.20×1.60	10μF	±10%	25	1.80
CL21X106KOYNNN □	X6S(EIA)	±22%(-55~+105℃)	2.00×1.25	10μF	±10%	16	1.45
CL05X105KP5NNN □	X6S(EIA)	±22%(-55~+105℃)	1.00×0.50	1.0μF	±10%	10	0.55
CL32X476KPJNNN □	X6S(EIA)	±22%(-55~+105℃)	3.20×2.50	47μF	±10%	10	2.70
CL21X106KPCLNN □	X6S(EIA)	±22%(-55~+105℃)	2.00×1.25	10μF	±10%	10	0.95
CL05X105KQ5NNN □	X6S(EIA)	±22%(-55~+105℃)	1.00×0.50	1.0μF	±10%	6.3	0.55
CL10X105KQ8NNN □	X6S(EIA)	±22%(-55~+105℃)	1.60×0.80	1.0μF	±10%	6.3	0.90
CL21X225KQFNNN □	X6S(EIA)	±22%(-55~+105℃)	2.00×1.25	2.2μF	±10%	6.3	1.35
CL21X475KQFNNN □	X6S(EIA)	±22%(-55~+105℃)	2.00×1.25	4.7μF	±10%	6.3	1.35
CL10X106KQ8NNN □	X5R(EIA)	±15%(-55~+85℃)	1.60×0.80	10μF	±10%	6.3	0.90
CL21X106KQNNN □	X6S(EIA)	±22%(-55~+105℃)	2.00×1.25	10μF	±10%	6.3	1.40
CL31X106KQHNNN □	X6S(EIA)	±22%(-55~+105℃)	3.20×1.60	10μF	±10%	6.3	1.80
CL21X226KQNNN □	X6S(EIA)	±22%(-55~+105℃)	2.00×1.25	22μF	±10%	6.3	1.40
CL21X106KRCLNN □	X6S(EIA)	±22%(-55~+105℃)	2.00×1.25	10μF	±10%	4	0.95
CL31B106KLHNNN □	X7R(EIA)	±15%(-55~+125℃)	3.20×1.60	10μF	±10%	50	1.80
CL32B226KAJNNN □	X7R(EIA)	±15%(-55~+125℃)	3.20×2.50	22μF	±10%	25	2.70
CL31B475KAHNNN □	X7R(EIA)	±15%(-55~+125℃)	3.20×1.60	4.7μF	±10%	25	1.80
CL31B106KAHNNN □	X7R(EIA)	±15%(-55~+125℃)	3.20×1.60	10μF	±10%	25	1.80
CL31B475KOHNNN □	X7R(EIA)	±15%(-55~+125℃)	3.20×1.60	4.7μF	±10%	16	1.80
CL31B106KOHNNN □	X7R(EIA)	±15%(-55~+125℃)	3.20×1.60	10μF	±10%	16	1.80
CL21B225KQFNNN □	X7R(EIA)	±15%(-55~+125℃)	2.00×1.25	2.2μF	±10%	10	1.35
CL21B225KPFNNN □	X7R(EIA)	±15%(-55~+125℃)	2.00×1.25	2.2μF	±10%	10	1.35
CL21B106KQNNN □	X7R(EIA)	±15%(-55~+125℃)	2.00×1.25	10μF	±10%	6.3	1.35
CL31B106KQHNNN □	X7R(EIA)	±15%(-55~+125℃)	3.20×1.60	10μF	±10%	6.3	1.80
CL32B226KQJNNN □	X7R(EIA)	±15%(-55~+125℃)	3.20×2.50	22μF	±10%	6.3	2.70

Part Number	TC Code	Temperature Characteristics	Size L×W (mm)	Capacitance	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
CL10F225ZP8NNN □	Y5V(EIA)	-82~+22%(-30~+85℃)	1.60×0.80	2.2μF	80%/-20%	10	0.90
CL21F106ZPFNNN □	Y5V(EIA)	-82~+22%(-30~+85℃)	2.00×1.25	10μF	80%/-20%	10	1.35
CL31F226ZPHNNN □	Y5V(EIA)	-82~+22%(-30~+85℃)	3.20×1.60	22μF	80%/-20%	10	1.80
CL32F226ZPJNNN □	Y5V(EIA)	-82~+22%(-30~+85℃)	3.20×2.50	22μF	80%/-20%	10	2.70
CL05F105ZQ5NNN □	Y5V(EIA)	-82~+22%(-30~+85℃)	1.00×0.50	1.0μF	80%/-20%	6.3	0.55
CL10F475ZQ8NNN □	Y5V(EIA)	-82~+22%(-30~+85℃)	1.60×0.80	4.7μF	80%/-20%	6.3	0.90
CL32F107ZQJNNN □	Y5V(EIA)	-82~+22%(-30~+85℃)	3.20×2.50	100μF	80%/-20%	6.3	2.70

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Super Small Size Capacitors

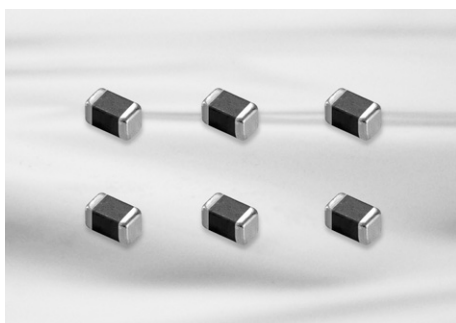


Feature

- Small chip size
- 03 Series(COG) MLCC shows very low ESR value.
- 02 and 03 Series are suited to only reflow soldering
- 02 and 03 Series are suited to miniature RF module, portable equipment and high frequency circuit

Application

- VCO, Tuner, RF Module
- MCM Module
- Mobile phone, Wireless LAN, Note PC
- ※ For using special purpose like Military, Medical, Aviation, Automobile device should be following a special specification.

Structure and Dimensions

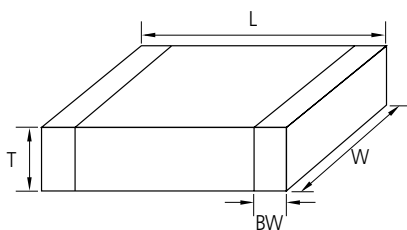

Code	EIA Code	Dimension(mm)			
		L	W	T	BW
02	01005	0.4 ± 0.02	0.2 ± 0.02	0.2 ± 0.02	$0.07 \sim 0.14$
03	0201	0.6 ± 0.03	0.3 ± 0.03	0.3 ± 0.03	0.15 ± 0.05

Part Numbering System

General Capacitors

Ultra High Capacitors

Super Small Capacitors

High Voltage Capacitors

Camera Strobe Circuit Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



Capacitance Table (Super Small Size Capacitors)

Size	01005(02)				0201(03)						
TC	C0G		X7R(B) / X5R(A)		C0G(C)		X7R(B) / X5R(A)				Y5V(F)
Rated V	6.3(Q)	16V(O)	6.3(Q)	10(P)	25(A)	50(B)	6.3(Q)	10(P)	16(O)	25(A)	6.3(Q)
Capacitance -pF- (part numbering code) and thickness -mm- (part numbering code)											
0.5(0R5)											
0.75(R75)											
1.0(010)											
2.0(020)											
3.0(030)											
4.0(040)											
5.0(050)											
6.0(060)											
7.0(070)											
8.0(080)											
9.0(090)											
10(100)											
12(120)											
15(150)											
18(180)											
20(200)											
22(220)											
27(270)											
33(330)											
39(390)											
47(470)											
56(560)											
68(680)											
82(820)											
100(101)											
150(151)											
220(221)											
330(331)											
470(471)											
680(681)											
1000(102)											
1500(152)											
2200(222)											
3300(332)											
4700(472)											
6800(682)											
10000(103)											
15000(153)											
22000(223)											
33000(333)											
47000(473)											
68000(683)											
100000(104)											
220000(224)											
1000000(105)											

:X7R(B):X5R(A):Y5V(F):C0G(C):X6S(X)

■ :X7R(B) ■ :X5R(A) ■ :Y5V(F) ■ :C0G(C) ■ :X6S(X)

Product Line Up (Super Small Size Capacitors)

Part Number	TC Code	Temperature Characteristics	Size L×W (mm)	Capacitance	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)	Remark
CL03C0R5CA3GNN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	0.5pF	±0.25pF	25	0.33	High-Q
CL03C010CA3GNN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	1.0pF	±0.25pF	25	0.33	High-Q
CL03C1R2CA3GNN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	1.2pF	±0.25pF	25	0.33	High-Q
CL03C1R5CA3GNN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	1.5pF	±0.25pF	25	0.33	High-Q
CL03C1R8CA3GNN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	1.8pF	±0.25pF	25	0.33	High-Q
CL03C020CA3GNN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	2.0pF	±0.25pF	25	0.33	High-Q
CL03C2R2CA3GNN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	2.2pF	±0.25pF	25	0.33	High-Q
CL03C2R7CA3GNN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	2.7pF	±0.25pF	25	0.33	High-Q
CL03C030CA3GNN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	3.0pF	±0.25pF	25	0.33	High-Q
CL03C3R3CA3GNN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	3.3pF	±0.25pF	25	0.33	High-Q
CL03C3R9CA3GNN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	3.9pF	±0.25pF	25	0.33	High-Q
CL03C4R7CA3GNN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	4.7pF	±0.25pF	25	0.33	High-Q
CL03C5R6DA3GNN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	5.6pF	±0.5pF	25	0.33	High-Q
CL03C6R8DA3GNN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	6.8pF	±0.5pF	25	0.33	High-Q
CL03C8R2DA3GNN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	8.2pF	±0.5pF	25	0.33	High-Q
CL03C090DA3GNN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	9.0pF	±0.5pF	25	0.33	High-Q
CL03C100JA3GNN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	10pF	±5%	25	0.33	High-Q
CL03C150JA3GNN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	15pF	±5%	25	0.33	High-Q
CL03C180JA3GNN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	18pF	±5%	25	0.33	High-Q
CL03C220JA3GNN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	22pF	±5%	25	0.33	High-Q
CL03C270JA3GNN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	27pF	±5%	25	0.33	High-Q
CL03C330JA3GNN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	33pF	±5%	25	0.33	High-Q
CL03C390JA3ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	39pF	±5%	25	0.33	
CL03C470JA3ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	47pF	±5%	25	0.33	
CL03C101JA3ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.60×0.30	100pF	±5%	25	0.33	
CL02C0R5CO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	0.5pF	±0.25pF	16	0.22	
CL02C010CO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	1.0pF	±0.25pF	16	0.22	
CL02C1R2CO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	1.2pF	±0.25pF	16	0.22	
CL02C1R5CO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	1.5pF	±0.25pF	16	0.22	
CL02C1R8CO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	1.8pF	±0.25pF	16	0.22	
CL02C020CO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	2.0pF	±0.25pF	16	0.22	
CL02C2R2CO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	2.2pF	±0.25pF	16	0.22	
CL02C2R7CO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	2.7pF	±0.25pF	16	0.22	
CL02C030CO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	3.0pF	±0.25pF	16	0.22	
CL02C3R3CO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	3.3pF	±0.25pF	16	0.22	
CL02C3R9CO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	3.9pF	±0.25pF	16	0.22	
CL02C4R7CO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	4.7pF	±0.25pF	16	0.22	
CL02C5R6DO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	5.6pF	±0.5pF	16	0.22	
CL02C6R8DO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	6.8pF	±0.5pF	16	0.22	
CL02C8R2DO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	8.2pF	±0.5pF	16	0.22	
CL02C090DO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	9.0pF	±0.5pF	16	0.22	
CL02C100JO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	10pF	±5%	16	0.22	
CL02C150JO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	15pF	±5%	16	0.22	
CL02C180JO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	18pF	±5%	16	0.22	
CL02C220JO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	22pF	±5%	16	0.22	
CL02C270JO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	27pF	±5%	16	0.22	
CL02C330JO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	33pF	±5%	16	0.22	
CL02C390JO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	39pF	±5%	16	0.22	
CL02C470JO2ANN□	COG(EIA)	±30ppm/°C(-55~+125°C)	0.40×0.20	47pF	±5%	16	0.22	

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.


Part Numbering
SystemGeneral
CapacitorsUltra High
CapacitorsSuper Small
CapacitorsHigh Voltage
CapacitorsCamera Strobe
Circuit CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Product Line Up (Super Small Size Capacitors)

Part Number	TC Code	Temperature Characteristics	Size L × W (mm)	Capacitance	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
CL03A104MA3NNN□	X5R(EIA)	± 15 % (-55 ~ +125 ℃)	0.60 × 0.30	100nF	± 20%	25	0.33
CL03B331KO3NNN□	X7R(EIA)	± 15 % (-55 ~ +125 ℃)	0.60 × 0.30	0.33nF	± 10%	16	0.33
CL03B102KO3NNN□	X7R(EIA)	± 15 % (-55 ~ +125 ℃)	0.60 × 0.30	1.0nF	± 10%	16	0.33
CL03A104KO3NNN□	X5R(EIA)	± 15 % (-55 ~ +85 ℃)	0.60 × 0.30	100nF	± 10%	16	0.33
CL02B101KP2NNN□	X7R(EIA)	± 15 % (-55 ~ +125 ℃)	0.40 × 0.20	0.1nF	± 10%	10	0.22
CL02B151KP2NNN□	X7R(EIA)	± 15 % (-55 ~ +125 ℃)	0.40 × 0.20	0.15nF	± 10%	10	0.22
CL02B221KP2NNN□	X7R(EIA)	± 15 % (-55 ~ +125 ℃)	0.40 × 0.20	0.22nF	± 10%	10	0.22
CL02B331KP2NNN□	X7R(EIA)	± 15 % (-55 ~ +125 ℃)	0.40 × 0.20	0.33nF	± 10%	10	0.22
CL02B471KP2NNN□	X7R(EIA)	± 15 % (-55 ~ +125 ℃)	0.40 × 0.20	0.47nF	± 10%	10	0.22
CL02B681KP2NNN□	X7R(EIA)	± 15 % (-55 ~ +125 ℃)	0.40 × 0.20	0.68nF	± 10%	10	0.22
CL02B102KP2NNN□	X7R(EIA)	± 15 % (-55 ~ +125 ℃)	0.40 × 0.20	0.1nF	± 10%	10	0.22
CL03B472KP3NNN□	X7R(EIA)	± 15 % (-55 ~ +125 ℃)	0.60 × 0.30	4.7nF	± 10%	10	0.33
CL03A103KP3NNN□	X5R(EIA)	± 15 % (-55 ~ +85 ℃)	0.60 × 0.30	10nF	± 10%	10	0.33
CL03B103KP3NNN□	X7R(EIA)	± 15 % (-55 ~ +125 ℃)	0.60 × 0.30	10nF	± 10%	10	0.33
CL03A104KP3NNN□	X5R(EIA)	± 15 % (-55 ~ +85 ℃)	0.60 × 0.30	100nF	± 10%	10	0.33
CL03A224KP3NNN□	X5R(EIA)	± 15 % (-55 ~ +85 ℃)	0.60 × 0.30	200nF	± 10%	10	0.33
CL02C560JQ2ANN□	C0G(EIA)	± 30ppm/℃ (-55 ~ +125 ℃)	0.40 × 0.20	0.056nF	± 5%	6.3	0.22
CL02C680JQ2ANN□	C0G(EIA)	± 30ppm/℃ (-55 ~ +125 ℃)	0.40 × 0.20	0.068nF	± 5%	6.3	0.22
CL02C820JQ2ANN□	C0G(EIA)	± 30ppm/℃ (-55 ~ +125 ℃)	0.40 × 0.20	0.082nF	± 5%	6.3	0.22
CL02C101JQ2ANN□	C0G(EIA)	± 30ppm/℃ (-55 ~ +125 ℃)	0.40 × 0.20	0.1nF	± 5%	6.3	0.22
CL03B472KQ3NNN□	X7R(EIA)	± 15 % (-55 ~ +125 ℃)	0.60 × 0.30	4.7nF	± 10%	6.3	0.33
CL02A151KQ2NNN□	X5R(EIA)	± 15 % (-55 ~ +85 ℃)	0.40 × 0.20	0.15nF	± 10%	6.3	0.22
CL02A221KQ2NNN□	X5R(EIA)	± 15 % (-55 ~ +85 ℃)	0.40 × 0.20	0.22nF	± 10%	6.3	0.22
CL02A331KQ2NNN□	X5R(EIA)	± 15 % (-55 ~ +85 ℃)	0.40 × 0.20	0.33nF	± 10%	6.3	0.22
CL02A471KQ2NNN□	X5R(EIA)	± 15 % (-55 ~ +85 ℃)	0.40 × 0.20	0.47nF	± 10%	6.3	0.22
CL02A681KQ2NNN□	X5R(EIA)	± 15 % (-55 ~ +85 ℃)	0.40 × 0.20	0.68nF	± 10%	6.3	0.22
CL02A102KQ2NNN□	X5R(EIA)	± 15 % (-55 ~ +85 ℃)	0.40 × 0.20	1.0nF	± 10%	6.3	0.22
CL02A152KQ2NNN□	X5R(EIA)	± 15 % (-55 ~ +85 ℃)	0.40 × 0.20	1.5nF	± 10%	6.3	0.22
CL02A222KQ2NNN□	X5R(EIA)	± 15 % (-55 ~ +85 ℃)	0.40 × 0.20	2.2nF	± 10%	6.3	0.22
CL02A332KQ2NNN□	X5R(EIA)	± 15 % (-55 ~ +85 ℃)	0.40 × 0.20	3.3nF	± 10%	6.3	0.22
CL02A472KQ2NNN□	X5R(EIA)	± 15 % (-55 ~ +85 ℃)	0.40 × 0.20	4.7nF	± 10%	6.3	0.22
CL02A682KQ2NNN□	X5R(EIA)	± 15 % (-55 ~ +85 ℃)	0.40 × 0.20	6.8nF	± 10%	6.3	0.22
CL02A103KQ2NNN□	X5R(EIA)	± 15 % (-55 ~ +85 ℃)	0.40 × 0.20	10nF	± 10%	6.3	0.22
CL03A223KQ3NNN□	X5R(EIA)	± 15 % (-55 ~ +85 ℃)	0.60 × 0.30	22nF	± 10%	6.3	0.33
CL03A473KQ3NNN□	X5R(EIA)	± 15 % (-55 ~ +85 ℃)	0.60 × 0.30	47nF	± 10%	6.3	0.33
CL03A104KQ3NNN□	X5R(EIA)	± 15 % (-55 ~ +85 ℃)	0.60 × 0.30	100nF	± 10%	6.3	0.33
CL03A224KQ3NNN□	X5R(EIA)	± 15 % (-55 ~ +85 ℃)	0.60 × 0.30	220nF	± 10%	6.3	0.33
CL03A105MQ3CSN□	X5R(EIA)	± 15 % (-55 ~ +85 ℃)	0.60 × 0.30	1.0nF	± 20%	6.3	0.35

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

High Voltage Capacitors

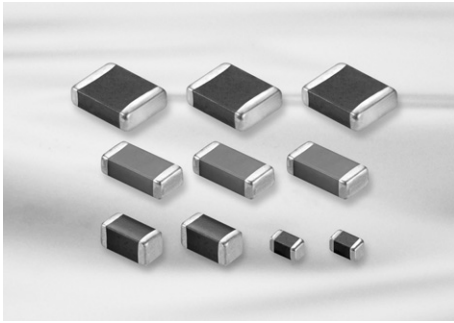

Feature


- Highly reliable performance
- Operating at high voltage level
- Wide voltage level: from 100V to 3000V
- High withstanding voltage
- Tape & reel surface mount assembly

Application

- Switching Power Circuit(SMPS)
- Lighting Ballast, LCD back lighting inverter
- DC-DC converter input filter, snubber circuit
- Phone, Fax, Modem
- Network(IEEE802.3)

※ For using special purpose like Military, Medical, Aviation, Automobile device should be following a special specification.

Structure and Dimensions

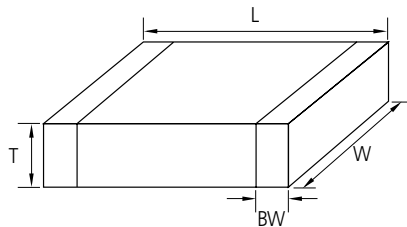

Code	EIA Code	Dimension(mm)			
		L	W	T	BW
10	0603	1.6 ± 0.1	0.8 ± 0.1	0.8 ± 0.1	0.3 ± 0.2
21	0805	2.0 ± 0.1	1.25 ± 0.1	1.25 ± 0.1	$0.5 + 0.2 / - 0.3$
31	1206	3.2 ± 0.2	1.6 ± 0.2	1.6 ± 0.2	0.5 ± 0.3
		3.2 ± 0.15	1.6 ± 0.15	1.25 ± 0.15 0.85 ± 0.15	
32	1210	3.2 ± 0.3	2.5 ± 0.2	2.5 ± 0.2	0.6 ± 0.3
42	1808	4.5 ± 0.4	2.0 ± 0.2	2.0 ± 0.2	0.8 ± 0.3
43	1812	4.5 ± 0.4	3.2 ± 0.3	2.5 ± 0.2	0.8 ± 0.3
55	2220	5.7 ± 0.4	5.0 ± 0.4	2.5 ± 0.2	1.0 ± 0.3

Part Numbering System

General Capacitors

Ultra High Capacitors

Super Small Capacitors

High Voltage Capacitors

Camera Strobe Circuit Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



Capacitance Table (High Voltage Capacitors)

Size	0603(10)		0805(21)			1206(31)							
TC	COG(C)												
Rated V	100(C)	250(E)	100(C)	200(D)	250(E)	100(C)	200(D)	250(E)	500(G)	630(H)	1000(I)	2000(J)	
Capacitance -pF- (part numbering code) and thickness -mm-													
0.5(0R5) ~9.1(9R1)	080 (8)	080 (8)	065 (A)	085 (C)	085 (C)	085 (C)			125 (F)	125 (F)	125 (F)	1.6 (H)	
10(100) ~27(270)													
33(330)													
39(390)													
47(470)													
56(560)													
68(680)													
82(820) ~180(181)													
220(221) ~390(391)													
470(471)													
560(561)			085 (C)	125 (F)		085 (C)	085 (C)				150 270		
680(681)			085 (C)	125 (F)			085 (C)	085 (C)					
820(821)							125 (F)	125 (F)					
1000(102)			125 (F)				125 (F)	125 (F)					
1200(122)							1.6 (H)	1.6 (H)					
1500(152)													
1800(182)							1.6 (H)						
2200(222)													
2700(272)							1.25 (F)		1.6 (H)				
3300(332)									1.6 (H)				
3900(392)							1.6 (H)						
4700(472)													
5600(562)													
6800(682)													
8200(822)													
10000(103)													
15000(153)													
18000(183)													

:X7R(B):X5R(A):Y5V(F):COG(C):X6S(X)

Capacitance Table (High Voltage Capacitors)

Size	1210(32)							1808(42)	
TC	C0G(C)								
Rated V	100(C)	200(D)	250(E)	500(G)	630(H)	1000(I)	2000(J)	2000(J)	3000(K)
Capacitance -pF- (part numbering code) and thickness -mm-									
10(100)								1.25 (F)	1.25 (F)
12(120)									
15(150)									
18(180)									
22(220)									
27(270)									
33(330)									
39(390)									
47(470)									
56(560)									
68(680)							1.25 (F)		
82(820)									
100(101)									
120(121)									1.6 (H)
150(151)									2.0 (I)
180(181)									
220(221)							1.6 (H)	1.6 (H)	
270(271)							2.0 (I)		
330(331)									
390(391)							2.5 (J)		
470(471)									
560(561)						1.6 (H)			
680(681)				1.25 (F)	1.25 (F)	2.0 (I)			
820(821)						2.5 (J)			
1000(102)									
1200(122)				1.6 (H)	1.6 (H)				
1500(152)				2.0 (I)	2.0 (I)				
1800(182)									
2200(222)									
2700(272)									
3300(332)		1.25 (F)	1.25 (F)						
3900(392)		1.6 (H)	1.6 (H)						
4700(472)		2.0 (I)	2.0 (I)	2.5 (J)	2.5 (J)				
5600(562)	1.25 (F)								
6800(682)		2.5 (J)							
8200(822)									
10000(103)	1.6 (H)								
12000(123)	2.0 (I)		2.5 (J)						
15000(153)									
18000(183)									
27000(273)	2.5 (J)								
39000(393)									
47000(473)									
56000(563)									

:X7R(B)
 :X5R(A)
 :Y5V(F)
 :C0G(C)
 :X6S(X)

Part Numbering System

General Capacitors

Ultra High Capacitors

Super Small Capacitors

High Voltage Capacitors

Camera Strobe Circuit Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting



Capacitance Table (High Voltage Capacitors)

Size	1812(43)								2220(55)				
TC	COG(C)												
Rated V	100(C)	200(D)	250(E)	500(G)	630(H)	1000(I)	2000(J)	3000(K)	250(E)	500(G)	630(H)	1000(I)	3000(K)
Capacitance -pF- (part numbering code) and thickness -mm-													
47(470)							1.25 (F)						
82(820)													
100(101)													
120(121)							1.6 (H)	1.6 (H)					
150(151)													
180(181)							2.0 (I)	2.0 (I)					
220(221)							2.5 (J)	2.5 (J)					
270(271)													
390(391)													
470(471)						1.25 (F)							2.5 (J)
680(681)													
820(821)				1.25 (F)	1.25 (F)	1.6 (H)							
1000(102)						2.0 (I)							
1200(122)						2.5 (J)							
1500(152)													
1800(182)				1.6 (H)	1.6 (H)								
2200(222)													
2700(272)				2.0 (I)	2.0 (I)							2.5 (J)	
3300(332)													
3600(362)													
4700(472)													
5600(562)													
6800(682)										2.0 (I)	2.0 (I)		
8200(822)				2.5 (J)	2.5 (J)					2.5 (J)	2.5 (J)		
10000(103)	1.25 (F)	2.5 (J)											
12000(123)													
15000(153)													
18000(183)	1.6 (H)												
22000(223)	2.0 (I)		2.5 (J)						2.5 (J)				
27000(273)	2.5 (J)												
33000(333)													
39000(393)													
47000(473)													
68000(683)													

■:X7R(B) ■:X5R(A) ■:Y5V(F) ■:COG(C) ■:X6S(X)

Capacitance Table (High Voltage Capacitors)

Size	0603(10)		0805(21)			1206(31)					
TC	X7R(B)										
Rated V	100(C)	100(C)	200(D)	250(E)	100(C)	200(D)	250(E)	500(G)	630(H)	1000(I)	2000(J)
Capacitance -pF- (part numbering code) and thickness -mm-											
220(221)											
330(331)											
470(471)											
680(681)											
1000(102)											
1500(152)		0.65 (A)	0.85 (C)	0.85 (C)						1.25 (F)	1.6 (H)
2200(222)	0.80 (8)							1.25 (F)	1.25 (F)		
3300(332)											
4700(472)					0.85 (C)						
6800(682)				1.25 (F)							
10000(103)											
15000(153)		0.85 (C)				0.85 (C)	1.25 (F)				
22000(223)								1.6 (H)	1.6 (H)		
33000(333)						1.25 (F)					
47000(473)							1.6 (H)				
68000(683)		1.25 (F)			1.25 (F)	1.6 (H)					
100000(104)											
150000(154)											
220000(224)					1.6 (H)						
1000000(105)											

Size	1210(32)						1808(42)
TC	X7R(B)						
Rated V	100(C)	250(E)	500(G)	630(H)	1000(I)	2000(J)	2000(J)
Capacitance -pF- (part numbering code) and thickness -mm-							
470(471)						1.25 (F)	
1000(102)							1.25 (F)
2200(222)							
3300(332)					1.25 (F)		
4700(472)							
6800(682)							
10000(103)			1.25 (F)	1.25 (F)			
15000(153)							
22000(223)							
33000(333)							
47000(473)			1.6 (H)	1.6 (H)			
68000(683)		2.0 (I)					
100000(104)							
150000(154)	1.25 (F)	2.5 (J)					
220000(224)	1.6 (H)						
330000(334)							
470000(474)	2.0 (I)						
680000(684)	2.5 (J)						
1000000(105)							

 :X7R(B)
 :X5R(A)
 :Y5V(F)
 :C0G(C)
 :X6S(X)

Part Numbering
System

General
Capacitors

Ultra High
Capacitors

Super Small
Capacitors

High Voltage
Capacitors

Camera Strobe
Circuit Capacitors

Array Type
Capacitors

Low ESL
Capacitors

Reliability Test
Condition

Premium Capacitors
for Automotive
Applications

Packaging
Specification

Application Manual
for Surface Mounting

Capacitance Table (High Voltage Capacitors)

Size	1812(43)						2220(55)				
TC	X7R(B)										
Rated V	100(C)	200(D)	250(E)	500(G)	1000(I)	2000(J)	100(C)	250(E)	500(G)	1000(I)	2000(J)
Capacitance -pF- (part numbering code) and thickness -mm-											
1000(102)											
1500(152)											
1800(182)						1.25 (F)					
2700(272)											
3300(332)											
3900(392)											
4700(472)					1.25 (F)						
5600(562)											1.6 (H)
6800(682)											
8200(822)											
10000(103)											
12000(123)						1.6 (H)					
15000(153)											
18000(183)											
22000(223)				1.25 (F)							
27000(273)					2.5 (J)						
33000(333)											
39000(393)											
47000(473)										2.0 (I)	
56000(563)											
68000(683)		1.25 (F)		1.6 (H)							
82000(823)				2.0 (I)							
100000(104)											
120000(124)											
150000(154)											
180000(184)	1.25 (F)										
220000(224)			2.5 (J)						2.5 (J)		
270000(274)											
330000(334)											
470000(474)	1.6 (H)										
560000(564)	2.0 (I)							2.5 (J)			
680000(684)											
820000(824)	2.5 (J)						1.6 (H)				
1000000(105)											
1500000(155)							2.0 (I)				
2200000(225)											
3300000(335)							2.5 (J)				
4700000(475)											

 :X7R(B)
 :X5R(A)
 :Y5V(F)
 :C0G(C)
 :X6S(X)

Product Line Up (High Voltage Capacitors)

Part Number	TC Code	Temperature Characteristics	Rated Voltage (Vdc)	Size L × W (mm)	Capacitance	Capacitance Tolerance	Thickness Max. (mm)
CL42C100JKFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	3000	4.50X2.00	10pF	±5%	1.35
CL31C220JJHNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	2000	3.20X1.60	22pF	±5%	1.80
CL31C470JJHNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	2000	3.20X1.60	47pF	±5%	1.80
CL32C101JJFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	2000	3.20X2.50	100pF	±5%	1.35
CL31C680JIFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	1000	3.20X1.60	68pF	±5%	1.35
CL31C101JIFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	1000	3.20X1.60	100pF	±5%	1.35
CL43C102JIIHNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	1000	4.50X3.20	1.0nF	±5%	1.80
CL43C122JIIHNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	1000	4.50X3.20	1.2nF	±5%	2.20
CL43C182JIIHNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	1000	4.50X3.20	1.8nF	±5%	2.80
CL31C470JHFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	630	3.20X1.60	47pF	±5%	1.35
CL31C680JHFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	630	3.20X1.60	68pF	±5%	1.35
CL31C101JHFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	630	3.20X1.60	100pF	±5%	1.35
CL31C150JGFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	500	3.20X1.60	15pF	±5%	1.35
CL31C180JGFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	500	3.20X1.60	18pF	±5%	1.35
CL31C220JGFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	500	3.20X1.60	22pF	±5%	1.35
CL31C270JGFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	500	3.20X1.60	27pF	±5%	1.35
CL31C330JGFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	500	3.20X1.60	33pF	±5%	1.35
CL31C390JGFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	500	3.20X1.60	39pF	±5%	1.35
CL31C470JGFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	500	3.20X1.60	47pF	±5%	1.35
CL31C560JGFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	500	3.20X1.60	56pF	±5%	1.35
CL31C680JGFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	500	3.20X1.60	68pF	±5%	1.35
CL31C820JGFNCN □	COG(EIA)	±30ppm/°C (-55~+125°C)	500	3.20X1.60	82pF	±5%	1.35
CL31C101JGFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	500	3.20X1.60	100pF	±5%	1.35
CL31C121JGFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	500	3.20X1.60	120pF	±5%	1.35
CL31C151JGFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	500	3.20X1.60	150pF	±5%	1.35
CL31C181JGFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	500	3.20X1.60	180pF	±5%	1.35
CL31C221JGFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	500	3.20X1.60	220pF	±5%	1.35
CL31C271JGFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	500	3.20X1.60	270pF	±5%	1.35
CL31C331JGFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	500	3.20X1.60	330pF	±5%	1.35
CL31C471JGFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	500	3.20X1.60	470pF	±5%	1.35
CL31C561JGFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	500	3.20X1.60	560pF	±5%	1.35
CL31C681JGFNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	500	3.20X1.60	680pF	±5%	1.80
CL31C102JGHNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	500	3.20X1.60	1.0nF	±5%	1.80
CL32C103JGJNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	500	3.20X2.50	10nF	±5%	2.70
CL43C223JGJNNN □	COG(EIA)	±300ppm/°C (-55~+125°C)	500	4.50X3.20	22nF	±5%	2.70
CL21C101JECNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	250	2.00X1.25	100pF	±5%	1.00
CL21C150JDCNNN □	COG(EIA)	±30ppm/°C (-55~+125°C)	200	2.00X1.25	15pF	±5%	1.00

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Part Numbering
SystemGeneral
CapacitorsUltra High
CapacitorsSuper Small
CapacitorsHigh Voltage
CapacitorsCamera Strobe
Circuit CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Product Line Up (High Voltage Capacitors)

Part Number	TC Code	Temperature Characteristics	Rated Voltage (Vdc)	Size L × W (mm)	Capacitance	Capacitance Tolerance	Thickness Max. (mm)
CL21C180JDCNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	200	2.00X1.25	18pF	±5%	1.00
CL21C330JDCNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	200	2.00X1.25	33pF	±5%	1.00
CL21C390JDCNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	200	2.00X1.25	39pF	±5%	1.00
CL21C470JDCNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	200	2.00X1.25	47pF	±5%	1.00
CL21C560JDCNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	200	2.00X1.25	56pF	±5%	1.00
CL21C680JDCNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	200	2.00X1.25	68pF	±5%	1.00
CL21C101JDCNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	200	2.00X1.25	100pF	±5%	1.00
CL21C121JDCNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	200	2.00X1.25	120pF	±5%	1.00
CL21C221JDCNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	200	2.00X1.25	220pF	±5%	1.00
CL21C102JDFNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	200	2.00X1.25	1.0nF	±5%	1.35
CL10C100JC8NNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	1.60X0.80	10pF	±5%	0.90
CL21C100JCANNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00X1.25	10pF	±5%	0.75
CL21C120JCANNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00X1.25	12pF	±5%	0.75
CL10C150JC8NNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	1.60X0.80	15pF	±5%	0.90
CL21C150JCANNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00X1.25	15pF	±5%	0.75
CL21C180JCANNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00X1.25	18pF	±5%	0.75
CL21C220JCANNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00X1.25	22pF	±5%	0.75
CL21C270JCANNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00X1.25	27pF	±5%	0.75
CL21C330JCANNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00X1.25	33pF	±5%	0.75
CL10C330JC8NNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	1.60X0.80	33pF	±5%	0.90
CL10C390JC8NNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	1.60X0.80	39pF	±5%	0.90
CL10C470JC8NNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	1.60X0.80	47pF	±5%	0.90
CL21C470JCANNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00X1.25	47pF	±5%	0.75
CL21C560JCCNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00X1.25	47pF	±5%	0.75
CL21C680JCANNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00X1.25	68pF	±5%	0.75
CL31C680JCCNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	3.20X1.60	68pF	±5%	1.00
CL21C820JCCNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	3.20X1.60	82pF	±5%	1.00
CL10C101JC8NNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	1.60X0.80	100pF	±5%	0.90
CL21C101JCANNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00X1.25	100pF	±5%	0.75
CL10C121JC8NNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	1.60X0.80	120pF	±5%	0.90
CL10C151JC8NNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	1.60X0.80	150pF	±5%	0.90
CL21C151JCANNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00X1.25	150pF	±5%	0.75
CL21C221JCANNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00X1.25	220pF	±5%	0.75
CL31C271JCCNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	3.20X1.60	270pF	±5%	1.00
CL21C331JCANNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00X1.25	330pF	±5%	0.75

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Product Line Up (High Voltage Capacitors)

Part Number	TC Code	Temperature Characteristics	Rated Voltage (Vdc)	Size L × W (mm)	Capacitance	Capacitance Tolerance	Thickness Max. (mm)
CL10C331JC8NNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	1.60X0.80	330pF	±5%	0.90
CL31C391JCCNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	3.20X1.60	390pF	±5%	1.00
CL10C471JC8NNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	1.60X0.80	470pF	±5%	0.90
CL21C471JCCNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00X1.25	470pF	±5%	1.00
CL21C561JCCNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00X1.25	560pF	±5%	1.00
CL31C561JCCNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	3.20X1.60	560pF	±5%	1.00
CL21C681JCCNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00X1.25	680pF	±5%	1.00
CL21C102JCFNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00X1.25	1.0nF	±5%	1.35
CL31C102JCCNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	3.20X1.60	1.0nF	±5%	1.00
CL31C152JCCNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	3.20X1.60	1.5nF	±5%	1.00
CL31C222JCCNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	3.20X1.60	2.2nF	±5%	1.00
CL31C392JCHNNN □	COG(EIA)	±30ppm/°C(-55~+125°C)	100	3.20X1.60	3.9nF	±5%	1.80

Part Numbering System

General Capacitors

Ultra High Capacitors

Super Small Capacitors

High Voltage Capacitors

Part Number	TC Code	Temperature Characteristics	Rated Voltage (Vdc)	Size L × W (mm)	Capacitance	Capacitance Tolerance	Thickness Max. (mm)
CL31B102KJHNNN □	X7R(EIA)	±15%(-55~+125°C)	2000	3.20 × 1.60	1.0nF	±10%	1.80
CL32B102KJFNNN □	X7R(EIA)	±15%(-55~+125°C)	2000	3.20 × 2.50	1.0nF	±10%	1.45
CL43B102KJFNNN □	X7R(EIA)	±15%(-55~+125°C)	2000	4.50 × 3.20	1.0nF	±10%	1.45
CL43B152KJFNNN □	X7R(EIA)	±15%(-55~+125°C)	2000	4.50 × 3.20	1.5nF	±10%	1.45
CL31B102K1FNNN □	X7R(EIA)	±15%(-55~+125°C)	1000	3.20 × 1.60	1.0nF	±10%	1.40
CL31B222K1FNNN □	X7R(EIA)	±15%(-55~+125°C)	1000	3.20 × 1.60	2.2nF	±10%	1.40
CL43B222K1FNNN □	X7R(EIA)	±15%(-55~+125°C)	1000	4.50 × 3.20	2.2nF	±10%	1.45
CL43B103K1FNNN □	X7R(EIA)	±15%(-55~+125°C)	1000	4.50 × 3.20	10nF	±10%	1.45
CL31B102KHFNNN □	X7R(EIA)	±15%(-55~+125°C)	630	3.20 × 1.60	1.0nF	±10%	1.40
CL32B472KHFNNN □	X7R(EIA)	±15%(-55~+125°C)	630	3.20 × 2.50	4.7nF	±10%	1.45
CL31B103KHFNNN □	X7R(EIA)	±15%(-55~+125°C)	630	3.20 × 1.60	10nF	±10%	1.40
CL32B333KHHNNN □	X7R(EIA)	±15%(-55~+125°C)	630	3.20 × 2.50	33nF	±10%	1.80
CL32B473KHHNNN □	X7R(EIA)	±15%(-55~+125°C)	630	3.20 × 2.50	47nF	±10%	1.80
CL31B221KGFNNN □	X7R(EIA)	±15%(-55~+125°C)	500	3.20 × 1.60	0.22nF	±10%	1.40
CL31B471KGFNNN □	X7R(EIA)	±15%(-55~+125°C)	500	3.20 × 1.60	0.47nF	±10%	1.40
CL31B102KGFNNN □	X7R(EIA)	±15%(-55~+125°C)	500	3.20 × 1.60	1.0nF	±10%	1.40
CL31B152KGFNNN □	X7R(EIA)	±15%(-55~+125°C)	500	3.20 × 1.60	1.5nF	±10%	1.40

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Camera Strobe Circuit Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

Product Line Up (High Voltage Capacitors)

Part Number	TC Code	Temperature Characteristics	Rated Voltage (Vdc)	Size L × W (mm)	Capacitance	Capacitance Tolerance	Thickness Max. (mm)
CL31B222KGFNNN □	X7R(EIA)	±15%(-55~+125℃)	500	3.20 × 1.60	2.2nF	±10%	1.35
CL31B332KGFNNN □	X7R(EIA)	±15%(-55~+125℃)	500	3.20 × 1.60	3.3nF	±10%	1.35
CL31B472KGFNNN □	X7R(EIA)	±15%(-55~+125℃)	500	3.20 × 1.60	4.7nF	±10%	1.35
CL31B682KGFNNN □	X7R(EIA)	±15%(-55~+125℃)	500	3.20 × 1.60	6.8nF	±10%	1.35
CL31B103KGFNNN □	X7R(EIA)	±15%(-55~+125℃)	500	3.20 × 1.60	10nF	±10%	1.35
CL32B153KGFNNN □	X7R(EIA)	±15%(-55~+125℃)	500	3.20 × 2.50	15nF	±10%	1.35
CL32B223KGFNNN □	X7R(EIA)	±15%(-55~+125℃)	500	3.20 × 2.50	22nF	±10%	1.35
CL43B473KGFNNN □	X7R(EIA)	±15%(-55~+125℃)	500	4.50 × 3.20	47nF	±10%	1.35
CL43B104KG INNN □	X7R(EIA)	±15%(-55~+125℃)	500	4.50 × 3.20	100nF	±10%	2.20
CL21B153KEFNNN □	X7R(EIA)	±15%(-55~+125℃)	250	2.00 × 1.25	15nF	±10%	1.35
CL31B473KEHNNN □	X7R(EIA)	±15%(-55~+125℃)	250	3.20 × 1.60	47nF	±10%	1.80
CL32B104KEJNNN □	X7R(EIA)	±15%(-55~+125℃)	250	3.20 × 2.50	100nF	±10%	2.80
CL43B474KEJNNN □	X7R(EIA)	±15%(-55~+125℃)	250	4.50 × 3.20	470nF	±10%	2.80
CL21B221KDCNNN □	X7R(EIA)	±15%(-55~+125℃)	200	2.00 × 1.25	0.22nF	±10%	1.00
CL21B331KDCNNN □	X7R(EIA)	±15%(-55~+125℃)	200	2.00 × 1.25	0.33nF	±10%	1.00
CL31B471KDCNNN □	X7R(EIA)	±15%(-55~+125℃)	200	3.20 × 1.60	0.47nF	±10%	1.00
CL21B102KDCNNN □	X7R(EIA)	±15%(-55~+125℃)	200	2.00 × 1.25	1.0nF	±10%	1.00
CL21B222KDCNNN □	X7R(EIA)	±15%(-55~+125℃)	200	2.00 × 1.25	2.2nF	±10%	1.00
CL31B222KDCNNN □	X7R(EIA)	±15%(-55~+125℃)	200	3.20 × 1.60	2.2nF	±10%	1.00
CL21B472KDCNNN □	X7R(EIA)	±15%(-55~+125℃)	200	2.00 × 1.25	4.7nF	±10%	1.00
CL31B472KDCNNN □	X7R(EIA)	±15%(-55~+125℃)	200	3.20 × 1.60	4.7nF	±10%	1.00
CL21B103KDCNNN □	X7R(EIA)	±15%(-55~+125℃)	200	2.00 × 1.25	10nF	±10%	1.00
CL31B153KDCNNN □	X7R(EIA)	±15%(-55~+125℃)	200	3.20 × 1.60	15nF	±10%	1.00
CL31B223KDCNNN □	X7R(EIA)	±15%(-55~+125℃)	200	3.20 × 1.60	22nF	±10%	1.00
CL31B333KDFNNN □	X7R(EIA)	±15%(-55~+125℃)	200	3.20 × 1.60	33nF	±10%	1.35
CL31B473KDFNNN □	X7R(EIA)	±15%(-55~+125℃)	200	3.20 × 1.60	47nF	±10%	1.35
CL32B473KDHNNN □	X7R(EIA)	±15%(-55~+125℃)	200	3.20 × 2.50	47nF	±10%	1.80
CL31B104KDHNNN □	X7R(EIA)	±15%(-55~+125℃)	200	3.20 × 1.60	100nF	±10%	1.80
CL43B104KDFNNN □	X7R(EIA)	±15%(-55~+125℃)	200	4.50 × 3.20	100nF	±10%	1.35
CL21B221KCANNN □	X7R(EIA)	±15%(-55~+125℃)	100	2.00 × 1.25	0.22nF	±10%	0.75
CL21B471KCANNN □	X7R(EIA)	±15%(-55~+125℃)	100	2.00 × 1.25	0.47nF	±10%	0.75
CL10B102KC8NNN □	X7R(EIA)	±15%(-55~+125℃)	100	1.60 × 0.80	1.0nF	±10%	0.90
CL21B102KCANNN □	X7R(EIA)	±15%(-55~+125℃)	100	2.00 × 1.25	1.0nF	±10%	0.75
CL21B222KCANNN □	X7R(EIA)	±15%(-55~+125℃)	100	2.00 × 1.25	2.2nF	±10%	0.75
CL21B332KCANNN □	X7R(EIA)	±15%(-55~+125℃)	100	2.00 × 1.25	3.3nF	±10%	0.75

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Product Line Up (High Voltage Capacitors)

Part Number	TC Code	Temperature Characteristics	Rated Voltage (Vdc)	Size L × W (mm)	Capacitance	Capacitance Tolerance	Thickness Max. (mm)
CL10B472KC8NNN □	X7R(EIA)	± 15%(-55~+125℃)	100	1.60 × 0.80	4.7nF	± 10%	0.90
CL21B472KCANNN □	X7R(EIA)	± 15%(-55~+125℃)	100	2.00 × 1.25	4.7nF	± 10%	0.75
CL21B682KCANNN □	X7R(EIA)	± 15%(-55~+125℃)	100	2.00 × 1.25	6.8nF	± 10%	0.75
CL10B103KC8NNN □	X7R(EIA)	± 15%(-55~+125℃)	100	1.60 × 0.80	10nF	± 10%	0.90
CL21B103KCANNN □	X7R(EIA)	± 15%(-55~+125℃)	100	2.00 × 1.25	10nF	± 10%	0.75
CL32B103KCFNNN □	X7R(EIA)	± 15%(-55~+125℃)	100	3.20 × 2.50	10nF	± 10%	1.35
CL21B153KCCNNN □	X7R(EIA)	± 15%(-55~+125℃)	100	2.00 × 1.25	15nF	± 10%	1.00
CL31B153KCCNNN □	X7R(EIA)	± 15%(-55~+125℃)	100	3.20 × 1.60	15nF	± 10%	1.00
CL21B223KCFNNN □	X7R(EIA)	± 15%(-55~+125℃)	100	2.00 × 1.25	22nF	± 10%	1.35
CL31B223KCCNNN □	X7R(EIA)	± 15%(-55~+125℃)	100	3.20 × 1.60	22nF	± 10%	1.00
CL31B333KCCNNN □	X7R(EIA)	± 15%(-55~+125℃)	100	3.20 × 1.60	33nF	± 10%	1.00
CL21B473KCFNNN □	X7R(EIA)	± 15%(-55~+125℃)	100	2.00 × 1.25	47nF	± 10%	1.35
CL31B473KCCNNN □	X7R(EIA)	± 15%(-55~+125℃)	100	3.20 × 1.60	47nF	± 10%	1.00
CL31B104KCFNNN □	X7R(EIA)	± 15%(-55~+125℃)	100	3.20 × 1.60	100nF	± 10%	1.40
CL31B154KCHNNN □	X7R(EIA)	± 15%(-55~+125℃)	100	3.20 × 1.60	150nF	± 10%	1.80
CL32B154KCFNNN □	X7R(EIA)	± 15%(-55~+125℃)	100	3.20 × 2.50	150nF	± 10%	1.45
CL32B224KCHNNN □	X7R(EIA)	± 15%(-55~+125℃)	100	3.20 × 2.50	220nF	± 10%	1.80
CL43B224KCFNNN □	X7R(EIA)	± 15%(-55~+125℃)	100	4.50 × 3.20	220nF	± 10%	1.35
CL32B334KCHNNN □	X7R(EIA)	± 15%(-55~+125℃)	100	3.20 × 2.50	330nF	± 10%	1.80
CL43B334KCFNNN □	X7R(EIA)	± 15%(-55~+125℃)	100	4.50 × 3.20	330nF	± 10%	1.35
CL32B474KCIINN □	X7R(EIA)	± 15%(-55~+125℃)	100	3.20 × 2.50	470nF	± 10%	2.20
CL43B474KCHNNN □	X7R(EIA)	± 15%(-55~+125℃)	100	4.50 × 3.20	470nF	± 10%	1.80
CL31B105KCHNNN □	X7R(EIA)	± 15%(-55~+125℃)	100	3.20 × 1.60	1.0μF	± 10%	1.80
CL32B105KCJNNN □	X7R(EIA)	± 15%(-55~+125℃)	100	3.20 × 2.50	1.0μF	± 10%	2.80
CL43B105KCJNNN □	X7R(EIA)	± 15%(-55~+125℃)	100	4.50 × 3.20	1.0μF	± 10%	2.80
CL55B105KCHNNN □	X7R(EIA)	± 15%(-55~+125℃)	100	5.70 × 5.00	1.0μF	± 10%	1.80

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Part Numbering System

General Capacitors

Ultra High Capacitors

Super Small Capacitors

High Voltage Capacitors

Camera Strobe Circuit Capacitors

Array Type Capacitors

Low ESL Capacitors


Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

Camera Strobe Circuit Capacitors

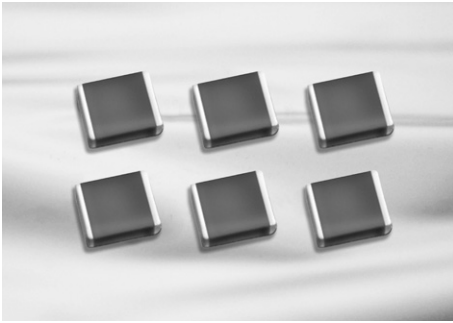


Feature

- Suitable for the trigger of the flash circuit
- Highly reliable performance
- Superior in bias characteristics
- Soft termination with a Ni/Sn plated overcoat

Application

- Strobe Circuit

Structure and Dimension

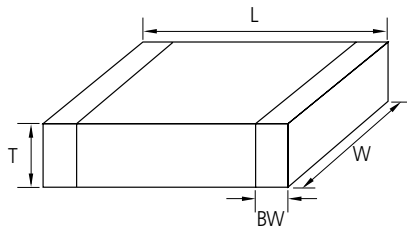

Code	EIA Code	Dimension(mm)			
		L	W	T	BW
31	1206	3.20 ± 0.20	1.60 ± 0.20	$0.85(\pm 0.15)$	$0.50 \pm 0.3/-0.3$
				$1.10(\pm 0.15)$	
				$1.60(\pm 0.20)$	

Capacitance Table (Camera Strobe Circuit Capacitors)

Size	1206(31)		
TC	X7R(B)		
Rated V	350(F)		
Capacitance (Capacitance part numbering code) and T (mm) Dimension (T Dimension part numbering code)			
10(103)			
15(153)		0.85 (C)	
22(223)			
33(333)		1.10 (E)	
47(473)		1.60 (H)	
68(683)			
100(104)			

□:X7R(B)

Part Numbering
System

General
Capacitors

Ultra High
Capacitors

Super Small
Capacitors

High Voltage
Capacitors

Camera Strobe
Circuit Capacitors

Array Type
Capacitors

Low ESL
Capacitors

Reliability Test
Condition

Premium Capacitors
for Automotive
Applications


Packaging
Specification

Application Manual
for Surface Mounting

Product Line Up (Camera Strobe Circuit Capacitors)

Part Number	TC Code	Temperature Characteristics	Rated Voltage (Vdc)	Size L × W (mm)	Capacitance	Capacitance Tolerance	Thickness Max. (mm)
CL31B103KFCSNN □	X7R(EIA)	±15%(-55~+125℃)	350	3.20 × 1.60	10nF	±10%	1.00
CL31B153KFCSNN □	X7R(EIA)	±15%(-55~+125℃)	350	3.20 × 1.60	15nF	±10%	1.00
CL31B223KFCSNN □	X7R(EIA)	±15%(-55~+125℃)	350	3.20 × 1.60	22nF	±10%	1.00
CL31B333KFESNN □	X7R(EIA)	±15%(-55~+125℃)	350	3.20 × 1.60	33nF	±10%	1.25
CL31B473KFHSNN □	X7R(EIA)	±15%(-55~+125℃)	350	3.20 × 1.60	47nF	±10%	1.80

Array Type Capacitors

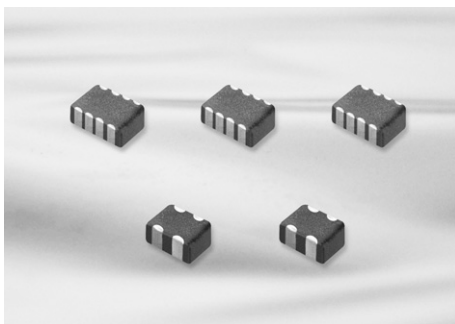


Feature

- Reduction in required space(more than 50%)
- Reduction in cost and time for replacement of PCB
- Reduction in amount of solder joints
- Easier PCB design
- Reduced waste from tape and reel packaging process
- It protect EMI bypassing digital signal line nose

Application

- A bypass for digital and analog signal line noise generated by telecommunication equipment and other common electronic circuits
- ※ For using special purpose like Military, Medical, Aviation, Automobile device should be following a special specification.

Structure and Dimensions

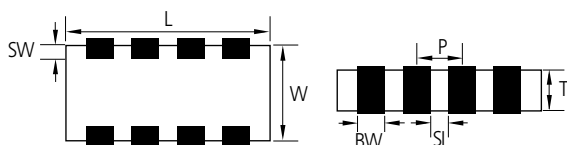


Pd MLCC (12th code in part number of Pd MLCC = A)

- Class I type
Capacitance < 10pF (Class I, 0402, 0603, 0805 case size)
Capacitance > 18pF (Class I, 1206 case size)
- Except the Capacitance range mentioned as above..
All other the Capacitance range is using Ni inner electrode for Class I,
Class II type (12th code in part number of Ni MLCC=N)


Code	EIA Code	Dimension(mm)					
		L	W	T	BW	SW	P
A	0504	1.37 ± 0.15	1.0 ± 0.15	0.35 ± 0.05 0.50 ± 0.05 0.60 ± 0.06 0.80 ± 0.08	0.36 ± 0.1	0.2 ± 0.1	0.64 ± 0.1
A	0805	2.0 ± 0.15	1.25 ± 0.15	0.85 ± 0.1	0.5 ± 0.2	0.25 ± 0.15	1.0 ± 0.1
B	0805	2.0 ± 0.15	1.25 ± 0.15	0.85 ± 0.1	0.25 ± 0.1	0.25 ± 0.15	0.5 ± 0.1
B	1206	3.2 ± 0.15	1.6 ± 0.15	0.85 ± 0.15	0.4 ± 0.2	0.3 ± 0.15	0.8 ± 0.2

Structure and Control Code

■ A : ARRAY(2-element)

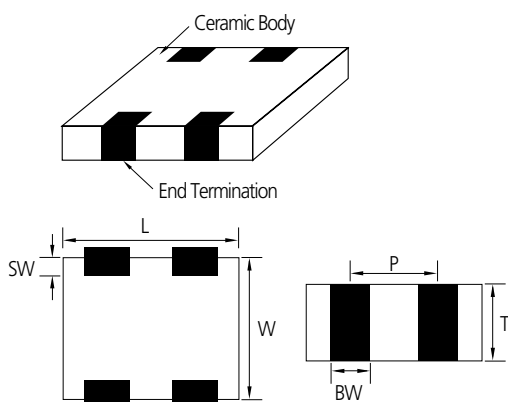

■ B : ARRAY(4-element)

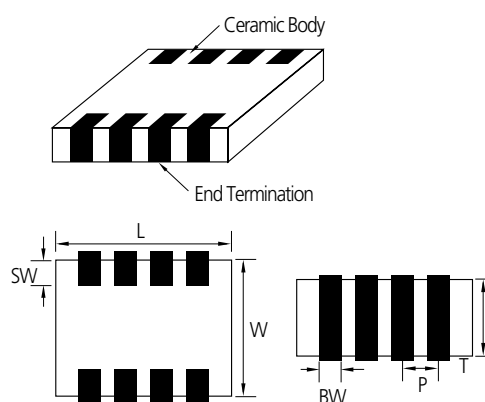

Capacitance Table

Size	0504(14)					0805(21)					1206(31)				
TC	C0G(C)	X7R(B) / X5R(A)				X5R(A) / X7R(B)					C0G(C)	X7R(B)		Y5V(F)	
Element	2 Element	2 Element				2 Element		4 Element			4 Element	4 Element		4 Element	
Rated V	25(A)	6.3(Q)	10(P)	16(O)	25(A)	10(P)	16(O)	10(P)	16(O)	50(B)	50(B)	25(A)	50(B)	25(A)	50(B)
Capacitance -pF- (part numbering code) and T Dimension -mm- (part numbering code)															
10(100)															
12(120)															
15(150)															
18(180)															
22(221)	0.60 (6)														
27(270)															
33(330)															
47(470)															
56(560)															
68(680)															
82(820)											0.85 (C)				
100(101)															
120(121)															
150(151)															
180(181)															
220(221)								0.85 (C)	0.85 (C)	0.85 (C)					
270(271)															
330(331)															
390(391)															
470(471)															
560(561)															
680(681)															
820(821)															
1000(102)															
1500(152)															
2200(222)															
3300(332)															
4700(472)															
6800(682)															
10000(103)															
15000(153)															
22000(223)															
33000(333)			0.60 (6)	0.60 (6)	0.60 (6)										
47000(473)															
68000(683)								0.85 (C)	0.85 (C)			0.85 (C)		0.85 (C)	0.85 (C)
100000(104)															
150000(154)															
220000(224)															
470000(474)			0.35 (3)	0.35 (3)	0.5 (5)	0.85 (C)	0.85 (C)								
680000(684)															
1000000(105)															
2200000(225)		0.80 (8)	0.80 (8)												

 :X7R(B)
 :X5R(A)
 :C0G(C)
 :Y5V(F)

※ Please consult us for special capacitance and high voltage(100V)

Part Numbering
System

General
Capacitors

Ultra High
Capacitors

Super Small
Capacitors

High Voltage
Capacitors

Camera Strobe
Circuit Capacitors

Array Type
Capacitors

Low ESL
Capacitors

Reliability Test
Condition

Premium Capacitors
for Automotive
Applications

Packaging
Specification


Application Manual
for Surface Mounting

Product Line Up (Array Type Capacitors)

Part Number	TC Code	Temperature Characteristics	Element Type	Size L×W (mm)	Capacitance	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
CL31C100JBCNBN □	COG(EIA)	±30ppm/°C(-55~+125℃)	4-Array	3.20×1.60	10pF	±5%	50	1.0
CL31C150JBCNBN □	COG(EIA)	±30ppm/°C(-55~+125℃)	4-Array	3.20×1.60	15pF	±5%	50	1.0
CL31C220JBCNBN □	COG(EIA)	±30ppm/°C(-55~+125℃)	4-Array	3.20×1.60	22pF	±5%	50	1.0
CL31C270JBCNBN □	COG(EIA)	±30ppm/°C(-55~+125℃)	4-Array	3.20×1.60	27pF	±5%	50	1.0
CL31C330KBCNBN □	COG(EIA)	±30ppm/°C(-55~+125℃)	4-Array	3.20×1.60	33pF	±10%	50	1.0
CL31C390KBCNBN □	COG(EIA)	±30ppm/°C(-55~+125℃)	4-Array	3.20×1.60	39pF	±10%	50	1.0
CL31C470JBCNBN □	COG(EIA)	±30ppm/°C(-55~+125℃)	4-Array	3.20×1.60	47pF	±5%	50	1.0
CL31C680JBCNBN □	COG(EIA)	±30ppm/°C(-55~+125℃)	4-Array	3.20×1.60	68pF	±5%	50	1.0
CL31C820JBCNBN □	COG(EIA)	±30ppm/°C(-55~+125℃)	4-Array	3.20×1.60	82pF	±5%	50	1.0
CL31C101JBCNBN □	COG(EIA)	±30ppm/°C(-55~+125℃)	4-Array	3.20×1.60	100pF	±5%	50	1.0
CL31C151KBCNBN □	COG(EIA)	±30ppm/°C(-55~+125℃)	4-Array	3.20×1.60	150pF	±10%	50	1.0
CL31C181JBCNBN □	COG(EIA)	±30ppm/°C(-55~+125℃)	4-Array	3.20×1.60	180pF	±5%	50	1.0
CL31C331JBCNBN □	COG(EIA)	±30ppm/°C(-55~+125℃)	4-Array	3.20×1.60	330pF	±5%	50	1.0
CL31C471JBCNBN □	COG(EIA)	±30ppm/°C(-55~+125℃)	4-Array	3.20×1.60	470pF	±5%	50	1.0

Part Number	TC Code	Temperature Characteristics	Element Type	Size L×W (mm)	Capacitance	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
CL21B471KBCNBN □	X7R(EIA)	±15%(-55~+125℃)	4-Array	2.00×1.25	470pF	±10%	50	0.95
CL31B102MBCNBN □	X7R(EIA)	±15%(-55~+125℃)	4-Array	3.20×1.60	1.0nF	±20%	50	1.0
CL31B103MBCNBN □	X7R(EIA)	±15%(-55~+125℃)	4-Array	3.20×1.60	10nF	±20%	50	1.0
CL31B153KBCNBN □	X7R(EIA)	±15%(-55~+125℃)	4-Array	3.20×1.60	15nF	±10%	50	1.0
CL31B473KACNBN □	X7R(EIA)	±15%(-55~+125℃)	4-Array	3.20×1.60	47nF	±10%	25	1.0
CL31F473ZBCNBN □	Y5V(EIA)	-82~+22%(-30~+85℃)	4-Array	3.20×1.60	47nF	80%/-20%	50	1.0
CL31B104KACNBN □	X7R(EIA)	±15%(-55~+125℃)	4-Array	3.20×1.60	100nF	±10%	25	1.0
CL31F104ZACNBN □	Y5V(EIA)	-82~+22%(-30~+85℃)	4-Array	3.20×1.60	100nF	80%/-20%	25	1.0
CL14A105MA5NAN □	X5R(EIA)	±15%(-55~+85℃)	2-Array	1.40×1.00	1.0μF	±20%	25	0.55
CL14A105MO5NAN □	X5R(EIA)	±15%(-55~+85℃)	2-Array	1.40×1.00	1.0μF	±20%	16	0.55
CL21B104KOCNBN □	X7R(EIA)	±15%(-55~+125℃)	4-Array	2.00×1.25	100nF	±10%	16	0.95
CL31B104KOCNBN □	X7R(EIA)	±15%(-55~+125℃)	4-Array	3.20×1.60	100nF	±10%	16	1.0
CL21B104MPCNBN □	X7R(EIA)	±15%(-55~+125℃)	4-Array	2.00×1.25	100nF	±20%	10	0.95
CL14A105MO3NAN □	X5R(EIA)	±15%(-55~+85℃)	2-Array	1.40×1.00	1.0μF	±20%	16	0.40
CL21A105KOCNAN □	X5R(EIA)	±15%(-55~+85℃)	2-Array	2.00×1.25	1.0μF	±10%	16	0.95
CL14A105MO8NAN □	X5R(EIA)	±15%(-55~+85℃)	2-Array	1.40×1.00	1.0μF	±20%	16	0.88
CL14A105MP3NAN □	X5R(EIA)	±15%(-55~+85℃)	2-Array	1.40×1.00	1.0μF	±20%	10	0.40
CL14A105MP5NAN □	X5R(EIA)	±15%(-55~+85℃)	2-Array	1.40×1.00	1.0μF	±20%	10	0.55
CL14A105KP8NAN □	X5R(EIA)	±15%(-55~+85℃)	2-Array	1.40×1.00	1.0μF	±10%	10	0.88
CL14A225KP8NAN □	X5R(EIA)	±15%(-55~+85℃)	2-Array	1.40×1.00	2.2μF	±10%	10	0.88
CL21A105MPCNAN □	X5R(EIA)	±15%(-55~+85℃)	2-Array	2.00×1.25	1.0μF	±20%	10	0.95
CL14A225KQ8NAN □	X5R(EIA)	±15%(-55~+85℃)	2-Array	1.40×1.00	2.2μF	±10%	6.3	0.88

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

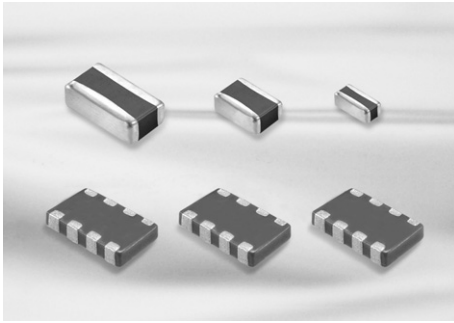


Feature

- Low ESL, good for noise reduction for high frequency
- Highly reliable tolerance and high speed automatic chip placement on PCBs
- Highly reliable performance
- Highly resistant termination metal
- Tape & reel for surface mount assembly

Application


- High Speed Microprocessor
- High Frequency Digital Equipment
- ※ For using special purpose like Military, Medical, Aviation, Automobile device should be following a special specification.

LICC(Low Inductance chip capacitor)



Code	EIA Code	Dimension(mm)			
		L	W	T	BW
L5	0204	0.52 ± 0.05	1.0 ± 0.05	0.3 ± 0.05	0.18 ± 0.08
01	0306	0.8 ± 0.15	1.6 ± 0.2	$0.5 + 0.05 / - 0.1$	$0.25 + 0.15$
12	0508	1.25 ± 0.1	2.0 ± 0.1	0.5 ± 0.1 0.85 ± 0.1	0.2 min.
13	0612	1.6 ± 0.2	3.2 ± 0.2	0.85 ± 0.1 1.25 ± 0.15	0.35 min.

SLIC(Super Low Inductance capacitor)

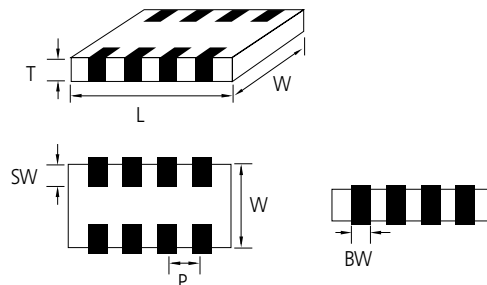

Code	EIA Code	Dimension(mm)					
		L	W	T	BW	SW	P
10	0603	1.6 ± 0.1	0.8 ± 0.1	$0.5 / +0.05 - 0.1$	0.25 ± 0.1	0.15 ± 0.1	0.4 ± 0.1
21	0805	2.0 ± 0.1	1.25 ± 0.1	$0.5 / +0.05 - 0.1$	0.25 ± 0.1	0.18 ± 0.1	0.5 ± 0.1
21	0805	2.0 ± 0.1	1.25 ± 0.1	0.85 ± 0.1	0.25 ± 0.1	0.18 ± 0.1	0.5 ± 0.1
31	1206	3.2 ± 0.15	1.6 ± 0.15	0.85 ± 0.1	0.4 ± 0.2	0.3 ± 0.15	0.8 ± 0.2

Part Numbering
SystemGeneral
CapacitorsUltra High
CapacitorsSuper Small
CapacitorsHigh Voltage
CapacitorsCamera Strobe
Circuit CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Capacitance Table (Low ESL Capacitors)

LICC											SLIC				
Size	0204(L5)		0306(01)						0612(13)		0603(10)	0805(21)			
TC	X6S(X) / X7S(Y) / X5R(A) / X7R(B)														
Rated V	4(R)	6.3(Q)	4(R)	6.3(Q)	10(P)	16(O)	25(A)	50(B)	6.3(Q)	50(B)	4(R)	4(R)	6.3(Q)	16(O)	
Capacitance table -uF - (part numbering code) and thiness -mm-															
0.01(103)															
0.015(153)								0.5 (5)							
0.022(223)															
0.033(333)										0.5 (5)					
0.047(473)							0.5 (5)			0.5 (5)					
0.068(683)															
0.1(104)		0.3 (3)				0.5 (5)									
0.15(154)															
0.22(224)				0.5 (5)	0.5 (5)									0.5 (5)	
0.33(334)	0.3 (3)														
0.47(474)				0.5 (5)											
0.68(684)													0.5 (5)		
1.0(105)											0.5 (5)		0.5 (5)		
1.5(155)				0.5 (5)											
2.2(225)															
3.3(335)															
4.7(475)									0.5 (5)						
10(106)															

:X7R(B):X5R(A):Y5V(F):C0G(C):X6S(X):X7S(Y)

 :X7R(B)
 :X5R(A)
 :Y5V(F)
 :C0G(C)
 :X6S(X)
 :X7S(Y)

Product Line Up (Low ESL Capacitors)

Part Number	TC Code	Temperature Characteristics	Size L × W (mm)	Capacitance	Capacitance Tolerance	Rated Voltage (Vdc)	Thickness Max. (mm)
CL01B103KB5NLN □	X7R(EIA)	± 15%(-55~+125℃)	0.80 × 1.60	10nF	± 10%	50	0.55
CL01B153KB5NLN □	X7R(EIA)	± 15%(-55~+125℃)	0.80 × 1.60	15nF	± 10%	50	0.55
CL01B223KB5NLN □	X7R(EIA)	± 15%(-55~+125℃)	0.80 × 1.60	22nF	± 10%	50	0.55
CL13B104KB5NLN □	X7R(EIA)	± 15%(-55~+125℃)	1.60 × 3.20	100nF	± 10%	50	0.60
CL01B333KA5NLN □	X7R(EIA)	± 15%(-55~+125℃)	0.80 × 1.60	33nF	± 10%	25	0.55
CL01B473KA5NLN □	X7R(EIA)	± 15%(-55~+125℃)	0.80 × 1.60	47nF	± 10%	25	0.55
CL01B683KO5NLN □	X7R(EIA)	± 15%(-55~+125℃)	0.80 × 1.60	68nF	± 10%	16	0.55
CL01B104KO5NLN □	X7R(EIA)	± 15%(-55~+125℃)	0.80 × 1.60	100nF	± 10%	16	0.55
CL21B104MO5NJN □	X7R(EIA)	± 15%(-55~+125℃)	2.00 × 1.25	100nF	± 20%	16	0.55
CL21B684MO5NJN □	X7R(EIA)	± 15%(-55~+125℃)	2.00 × 1.25	680nF	± 20%	16	0.55
CL01B154KP5NLN □	X7R(EIA)	± 15%(-55~+125℃)	0.80 × 1.60	150nF	± 10%	10	0.55
CL01B224KP5NLN □	X7R(EIA)	± 15%(-55~+125℃)	0.80 × 1.60	220nF	± 10%	10	0.55
CLL5Y104MQ3NLN □	X7S(EIA)	± 22%(-55~+125℃)	0.50 × 1.00	100nF	± 20%	6.3	0.35
CL01A334KQ5NLN □	X5R(EIA)	± 15%(-55~+85℃)	0.80 × 1.60	330nF	± 10%	6.3	0.55
CL01A474KQ5NLN □	X5R(EIA)	± 15%(-55~+85℃)	0.80 × 1.60	470nF	± 10%	6.3	0.55
CL01A684KQ5NLN □	X5R(EIA)	± 15%(-55~+85℃)	0.80 × 1.60	680nF	± 10%	6.3	0.55
CL21B684MQ5NJN □	X7R(EIA)	± 15%(-55~+125℃)	2.00 × 1.25	680nF	± 20%	6.3	0.55
CL01A105KQ5NLN □	X5R(EIA)	± 15%(-55~+85℃)	0.80 × 1.60	1.0μF	± 10%	6.3	0.55
CL13A106MQFNLN □	X5R(EIA)	± 15%(-55~+85℃)	1.60 × 3.20	10μF	± 20%	6.3	1.40
CLL5X224MR3NLN □	X6S(EIA)	± 22%(-55~+105℃)	0.50 × 1.00	220nF	± 20%	4.0	0.35
CL10Y474MR5NJN □	X7S(EIA)	± 22%(-55~+125℃)	1.60 × 0.80	470nF	± 20%	4.0	0.55
CLL5X474MR3NLN □	X6S(EIA)	± 22%(-55~+105℃)	0.50 × 1.00	470nF	± 20%	4.0	0.35
CL01Y105MR5NLN □	X7S(EIA)	± 22%(-55~+125℃)	0.80 × 1.60	1.0μF	± 20%	4.0	0.55
CL01Y105MR5NJN □	X7S(EIA)	± 22%(-55~+125℃)	1.60 × 0.80	1.0μF	± 20%	4.0	0.55
CL21Y105MR5NJN □	X7S(EIA)	± 22%(-55~+125℃)	2.00 × 1.25	1.0μF	± 20%	4.0	0.55
CL01Y225MR5NLN □	X7S(EIA)	± 22%(-55~+125℃)	0.80 × 1.60	2.2μF	± 20%	4.0	0.55
CL10Y225MR5NJN □	X7S(EIA)	± 22%(-55~+125℃)	1.60 × 0.80	2.2μF	± 20%	4.0	0.55

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Part Numbering System

General Capacitors

Ultra High Capacitors

Super Small Capacitors

High Voltage Capacitors

Camera Strobe Circuit Capacitors

Array Type Capacitors

Low ESL Capacitors




Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

You can check the specification at the web site or contact sales people for each product with mark*

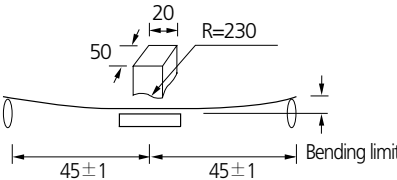No	Item		Performance		Test Condition																
6	Temperature Characteristics of Capacitance	CLASS I	Characteristic	Temp.Coefficient(PPM/°C)	Capacitance shall be measured by the steps shown in the following table																
			C	0 ± 30																	
			P	-150 ± 60																	
			R	-220 ± 60																	
			S	-330 ± 60																	
			T	-470 ± 60																	
			U	-750 ± 120																	
		S	+350 ~ -1000																		
		CLASS II	Characteristic	Capacitance Change(%) with No bias	(1) CLASS I Temperature Coefficient shall be calculated from the formula as below Temp. Coefficient= $\frac{C2 - C1}{C1 \times \Delta T} \times 10^6$ [ppm/°C] C1: Capacitance at step 3 C2: Capacitance at 85 °C ΔT:60 °C(=85 °C-25 °C) (2) CLASS II Capacitance Change shall be calculated from the formula as below $\Delta C = \frac{C2 - C1}{C1} \times 100(\%)$ C1: Capacitance at step 3 C2: Capacitance at step 2 or 4																
			A(X5R) / B(X7R)	± 15%																	
X(X6S), Y(X7S)	± 22%																				
F(Y5V)	+22%~-82%																				
7	Adhesive Strength of Termination	No indication of peeling shall occur on the terminal electrode		Apply 500g.f* pressure for 10 ± 1 sec. *200g.f for 0201 *100g.f for 01005																	
																					
		8	Appearance	No indication of peeling shall occur		• Bending Limit: 1mm • Test Speed: 1.0mm/sec. • Keep the test board at the limit point in 5 sec. • Then Measure Capacitance															
				Capacitance	Characteristic		Capacitance Change														
			CLASS I		± 5% or ± 0.5 pF whichever is larger																
			CLASS II		± 12.5%																
			A(X5R), B(X7R), X(X6S), Y(X7S)	± 12.5%																	
		F(Y5V)	± 30%																		
		9	Solderability	More than 75% of the terminal surface is to be soldered newly, so metal part does not come out or dissolve		<table><tr><td>Solder</td><td>Sn-3Ag-0.5Cu</td><td>63Sn-37Pb</td></tr><tr><td>Solder Temp.</td><td>245 ± 5 °C</td><td>235 ± 5 °C</td></tr><tr><td>Flux</td><td colspan="2">RMA Type</td></tr><tr><td>Dip time</td><td>3 ± 0.3 sec.</td><td>5 ± 0.5 sec.</td></tr><tr><td>Pre-heating</td><td colspan="2">at 80~120 °C for 10~30 sec.</td></tr></table>	Solder	Sn-3Ag-0.5Cu	63Sn-37Pb	Solder Temp.	245 ± 5 °C	235 ± 5 °C	Flux	RMA Type		Dip time	3 ± 0.3 sec.	5 ± 0.5 sec.	Pre-heating	at 80~120 °C for 10~30 sec.	
				Solder	Sn-3Ag-0.5Cu	63Sn-37Pb															
Solder Temp.	245 ± 5 °C			235 ± 5 °C																	
Flux	RMA Type																				
Dip time	3 ± 0.3 sec.			5 ± 0.5 sec.																	
Pre-heating	at 80~120 °C for 10~30 sec.																				
																					
10	Resistance to Soldering Heat			Appearance	No mechanical damage shall occur		Solder temperature: 270 ± 5 °C DIP TIME:10 ± 1 sec. Each termination shall be fully immersed and preheated as below:														
				Capacitance	Characteristic	Capacitance Change		<table><tr><td>Step</td><td>Temperature(°C)</td><td>Time (sec.)</td></tr><tr><td>1</td><td>80~100</td><td>60</td></tr><tr><td>2</td><td>150~180</td><td>60</td></tr></table>	Step	Temperature(°C)	Time (sec.)	1	80~100	60	2	150~180	60				
					Step	Temperature(°C)	Time (sec.)														
		1	80~100		60																
		2	150~180		60																
		CLASS I	± 2.5% or ± 0.25 pF whichever is larger																		
		CLASS II	± 7.5%																		
		A(X5R), B(X7R)	± 7.5%																		
		X(X6S), Y(X7S)	± 7.5%																		
		F(Y5V)	± 20%																		
Q (CLASS I)	Within the specified initial value		Leave the capacitor in ambient condition for specified time* before measurement *24 ± 2 hours(CLASS I) 24 ± 2 hours(CLASS II)																		
Tanδ (CLASS II)	Within the specified initial value																				
Insulation resistance	Within the specified initial value																				
Withstanding voltage	Within the specified initial value																				

Part Numbering System

General Capacitors

Ultra High Capacitors

Super Small Capacitors

High Voltage Capacitors

Camera Strobe Circuit Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

No	Item	Performance		Test Condition		
11	Vibration Test	Appearance	No mechanical damage shall occur		The capacitor shall be subjected to a harmonic motion having a total amplitude of 1.5mm changing frequency from 10Hz to 55Hz and back to 10Hz in about 1 min. Repeat this for 2hours each in 3 mutually perpendicular directions.	
		Capacitance	Characteristic	Capacitance Change		
			CLASS I			$\pm 2.5\%$ or ± 0.25 pF whichever is larger
			CLASS II	A(X5R), B(X7R)		$\pm 5\%$
				X(X6S), Y(X7S)		$\pm 10\%$
		F(Y5V)		$\pm 20\%$		
		Q (CLASS I)	Within the specified initial value			
Tan δ (CLASS II)	Within the specified initial value					
Insulation resistance	Within the specified initial value					
12	Moisture Resistance	Appearance	No mechanical damage shall occur		Applied Voltage: rated voltage Temperature: $40 \pm 2^{\circ}\text{C}$ Humidity: 90~95% RH Duration Time: 500+12/0 Hr. Charge/Discharge Current: 50mA max. Perform the initial measurement according to Note1. Perform the final measurement according to Note2. This test is only applied to $V_r \leq 500\text{V}$ products. You can check the specification at the web site or contact sales people for each product with mark*	
		Capacitance	Characteristic	Capacitance Change		
			CLASS I			$\pm 7.5\%$ or $\pm 0.75\text{pF}$ whichever is larger
			CLASS II	A(X5R), B(X7R), X(X6S), Y(X7S)		$\pm 12.5\%$
				F(Y5V)		$\pm 30\%$
		Q (CLASS I)	Capacitance $\geq 30\text{pF}$: $Q \geq 200$ $< 30\text{pF}$: $Q \geq 100 + 10/3 \times C$ (C: Capacitance)			
		Tan δ (CLASS II)	1.Capacitance: A(X5R) 0.05 max / 0.075 max* (35V / 50V) 0.05 max / 0.075 max* / 0.125 max* (16V / 25V) 0.075 max / 0.125 max* ($\leq 10\text{V}$) 2.Capacitance: B(X7R), X(X6S) 0.05 max / 0.125 max* (16V / 25V / 35V / 50V $\geq$) 0.075 max / 0.125 max* ($\leq 10\text{V}$) 3.Capacitance: F(Y5V) 0.09 max (50V) 0.09 max / 0.125 max* (25V / 35V) 0.09 max / 0.125 max* / 0.16 max* (16V) 0.16 max / 0.195 max* (10V) 0.195 max (4V / 6.3V)			
Insulation resistance	500M Ω min. or 25M $\Omega \cdot \mu\text{F}$ min. product whichever is smaller / 12.5M $\Omega \cdot \mu\text{F}$ or over*					
13	High Temperature Resistance	Appearance	No mechanical damage shall occur		Temperature : max. operating temperature Duration Time: 1000+48/0 Hr. Charge/Discharge Current: 50mA max. $V_r \leq 200\text{V}$: 200% of the rated Voltage $250\text{V} \leq V_r \leq 500\text{V}$: 150% of the rated Voltage $V_r = 630\text{V}$: 120% of the rated Voltage $1000\text{V} \leq V_r \leq 3000\text{V}$: 100% of the rated Voltage * : 150% or 100% of the rated Voltage Perform the initial measurement according to Note1 for class II Perform the final measurement according to Note2. You can check the specification at the web site or contact sales people for each product with mark*	
		Capacitance	Characteristic	Capacitance Change		
			CLASS I			$\pm 3\%$ or ± 0.3 pF whichever is larger
			CLASS II	A(X5R), B(X7R), X(X6S), Y(X7S)		$\pm 12.5\%$
				F(Y5V)		$\pm 30\%$
		Q (CLASS I)		Capacitance $\geq 30\text{pF}$: $Q \geq 350$ $10 \leq \text{Capacitance} < 30\text{pF}$: $Q \geq 275 + 2.5 \times C$ Capacitance $< 10\text{pF}$: $Q \geq 200 + 10 \times C$ (C: Capacitance)		
		Tan δ (CLASS II)	1.Capacitance: A(X5R) 0.05 max / 0.075 max* (35V / 50V) 0.05 max / 0.075 max* / 0.125 max* (16V / 25V) 0.075 max / 0.125 max* ($\leq 10\text{V}$) 2.Capacitance: B(X7R), X(X6S) 0.05 max / 0.125 max* (16V / 25V / 35V / 50V $\geq$) 0.075 max / 0.125 max* ($\leq 10\text{V}$) 3.Capacitance: F(Y5V) 0.09 max (50V) 0.09 max / 0.125 max* (25V / 35V) 0.09 max / 0.125 max* / 0.16 max* (16V) 0.16 max / 0.195 max* (10V) 0.195 max (4V / 6.3V)			
Insulation resistance	1,000M Ω min. or 50M $\Omega \cdot \mu\text{F}$ min. product whichever is smaller / 25M $\Omega \cdot \mu\text{F}$ or over*					

No	Item	Performance			Test Condition			
14	Temperature Cycle	Appearance	No mechanical damage shall occur			Capacitor shall be subjected to 5 cycles. Condition for 1 cycle:		
		Capacitance	Characteristic		Capacitance Change			
			CLASS I		$\pm 2.5\%$ or $\pm 0.25\text{pF}$ whichever is larger	Step	Temperature(°C)	Time(min.)
			CLASS II	A(X5R), B(X7R)	$\pm 7.5\%$	1	min. operating temperature +0/-3	30
				X(X6S), Y(X7S)	$\pm 15\%$	2	25	2~3
				F(Y5V)	$\pm 20\%$	3	max. operating temperature +0/-3	30
		Q (CLASS I)	Within the specified initial value			4	25	2~3
		Tanδ (CLASS II)	Within the specified initial value			Leave the capacitor in ambient condition for specified time* before measurement *24 ± 2 hours(CLASS I) 24 ± 2 hours(CLASS II)		
Insulation resistance	Within the specified initial value							
No	Recommended Soldering Method							
15	Recommended Soldering Method By Size & Capacitance	Size inch(mm)	Temperature Characteristic	Capacitance	Condition			
					Flow	Reflow		
		01005(0402)	-	-	-	○		
		0201 (0603)						
		0402 (1005)						
		0603(1608)	Class I	-	○	○		
			Class II	$C < 1\mu\text{F}$	○	○		
				$C \geq 1\mu\text{F}$	-	○		
		0805 (2012)	Class I	-	○	○		
			Class II	$C < 4.7\mu\text{F}$	○	○		
				$C \geq 4.7\mu\text{F}$	-	○		
			Array	-	-	○		
		1206 (3216)	Class I	-	○	○		
			Class II	$C < 10\mu\text{F}$	○	○		
				$C \geq 10\mu\text{F}$	-	○		
			Array	-	-	○		
		1210 (3225)	-	-	-	○		
1808 (4520)	○							
1812 (4532)	○							
2220 (5750)	○							

Note1. Initial Measurement For Class II

Perform the heat treatment at 150°C+0/-10°C for 1 hour. Then Leave the capacitor in ambient condition for 24 $\pm$ 2 hours before measurement. Then perform the measurement.

Note2. Latter Measurement**1. CLASS I**

Leave the capacitor in ambient condition for 24 $\pm$ 2 hours before measurement. Then perform the measurement.

2. CLASS II

Perform the heat treatment at 150°C+0/-10°C for 1 hour. Then Leave the capacitor in ambient condition for 24 $\pm$ 2 hours before measurement. Then perform the measurement.

Note3. All Size in Reliability Test Condition Section is "inch"

Note4. Camera Strobe Circuit Capacitors Should be Following a Special Reliability Test Condition.
Please check with our sales representatives or product engineers.


Part Numbering
SystemGeneral
CapacitorsUltra High
CapacitorsSuper Small
CapacitorsHigh Voltage
CapacitorsCamera Strobe
Circuit CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

S A M S U N G E L E C T R O - M E C H A N I C S





Premium Capacitors for Automotive Applications

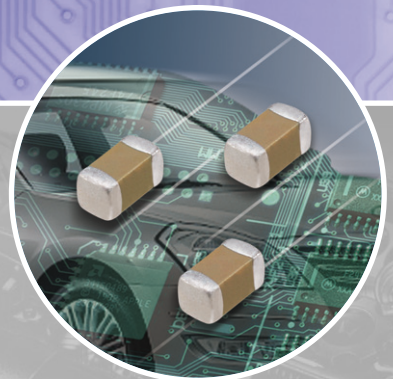

SAMSUNG
ELECTRO-MECHANICS

SAMSUNG

S A M S U N G E L E C T R O - M E C H A N I C S

Premium Capacitors for Automotive Applications

Part Numbering System (Automotive Capacitors)

	CL	31	B	225	K	B	H	4	P	N	E
	1	2	3	4	5	6	7	8	9	10	11
1. SERIES CODE _____ CL=Multi layer Ceramic Capacitors											
2. SIZE CODE — inch (mm) _____ 05=0402(1005) 21=0805(2012) 10=0603(1608) 31=1206(3216)											
★ 3. DIELECTRIC CODE _____ Class I =C(COG) Class II =B(X7R)											
4. CAPACITANCE CODE _____ Capacitance expressed in pF. 2 significant digits plus number of zeros. example) 106=10 × 10 ⁶ =10000000pF For Values < 10pF, Letter R denotes decimal point example) 1R5=1.5pF											
★★ 5. TOLERANCE CODE _____ 10pF and Under : C=±0.25pF D=±0.5pF Over 10pF : J=±5% K=±10% M=±20% ※ This code has only typical specifications. Please refer to individual specifications.											
6. RATED VOLTAGE CODE _____ O =16V B =50V A =25V C =100V											
★★★ 7. THICKNESS CODE _____ 5 = 0.50mm 6= 0.60mm 8 = 0.80mm C = 0.85mm P = 1.15mm F = 1.25mm H = 1.60mm J = 2.50mm ※ This code has only typical specifications. Please refer to individual specifications.											
8. DESIGN CODE _____ 1=Standard 4=Soft termination ※ This code has only typical specifications. Please refer to individual specifications.											
9. PRODUCT CODE _____ P = AEC-Q200 Cerficated ※ If orders are placed without returned specification, please allow us to judge that specification is accepted by your side.											
10. GRADE CODE _____ N=Standard											
11. PACKAGING CODE _____ B = Bulk O = Cardboard Tape, 10" Reel E = Embossed Type, 7" Reel P = Bulk Case D = Cardboard Tape, 13" Reel(10,000ea) F = Embossed Type, 13" Reel C = Cardboard Tape, 7" Reel L = Cardboard Tape, 13" Reel(15,000ea) S = Embossed Type, 10" Reel											

This catalog has only typical specifications because there is no space for detailed specifications.
 Please approve our product specifications or transact the approval sheet for product specifications before ordering.

★
Class I

Symbol	EIA Code	Operation Temperature Range(°C)	Temperature Coefficient Range(ppm/°C)
C	COG	-55 ~ +125	0 ±30

Class II

Symbol	EIA Code	Operation Temperature Range(°C)	Capacitance Change (ΔC %)
B	X7R	-55 ~ +125	0 ±15

★★
Capacitance Tolerance

Code	Capacitance Tolerance	TC	Capacitance Step	Rated Capacitance
C	± 0.25 pF	COG	Under 5 pF	E-12 series ★
D	± 0.5 pF	COG	6.0 to 9.0 pF	E-12 series ★
J	± 5%	COG	Over 10 pF	E-12 series
K	± 10%	X7R	Under 0.01 μF	E-3 series
			Over 0.01 μF	E-6 series
M	± 20%	X7R	Under 0.01 μF	E-3 series
			Over 0.01 μF	E-6 series

★E-24 series is also available


Series	Capacitance Step											
E-3	1.0				2.2				4.7			
E-6	1.0		1.5		2.2		3.3		4.7		6.8	
E-12	1.0	1.2	1.5	1.8	2.2	2.7	3.3	3.9	4.7	5.6	6.8	8.2
E-24	1.0	1.1	1.2	1.3	2.2	2.4	2.7	3.0	4.7	5.1	5.6	6.2
	1.5	1.6	1.8	2.0	3.3	3.6	3.9	4.3	6.8	7.5	8.2	9.1

★★★

Size	Code	Thickness(mm)	Spec(mm) ★
0402(1005)	5	0.50	± 0.05
0603(1608)	8	0.80	± 0.10
0805(2012)	6	0.60	± 0.10
	C	0.85	± 0.10
	F	1.25	± 0.10
1206(3216)	C	0.85	± 0.15
	P	1.15	± 0.10
	H	1.60	± 0.20

★The tolerance will be changed by Customer' standards and our new products. (High Capacitance)
Please check with our sales representatives or product engineers before ordering.

Part Numbering
SystemGeneral
CapacitorsUltra High
CapacitorsSuper Small
CapacitorsHigh Voltage
CapacitorsCamera Strobe
Circuit CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

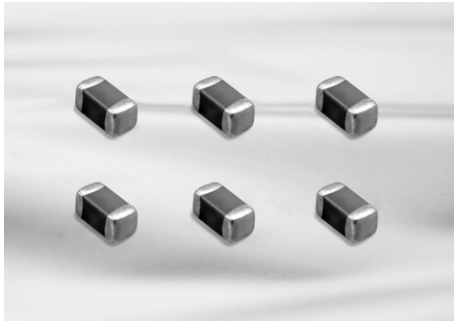


Feature

- Automotive products are manufactured in state of the art facilities recommended for registration to ISO/TS 16949:2002.
- Automotive products meet AEC-Q-200 requirements.
- Automotive products are RoHS compliant.
- Samsung terminations are suitable for all flow and reflow soldering systems. (10/21/31 size type only)
- Automotive products meet JEDEC-020-D requirements.
- COG dielectric components contain BME and copper terminations with a Ni/Sn plated overcoat.
- X7R dielectric components have BME and soft terminations with a Ni/Sn plated overcoat.

Application

- Automotive Electronic Equipment
(Powertrain, Safety, Body & Chassis, Convenience, Infotainment)

Structure and Dimensions



Code	EIA Code	Dimension(mm)			
		L	W	T	BW
05	0402	1.00 ± 0.05	0.50 ± 0.05	$0.50 (\pm 0.05)$	$0.2 + 0.15 / - 0.1$
10	0603	1.60 ± 0.10	0.80 ± 0.10	$0.80 (\pm 0.10)$	0.3 ± 0.2
21	0805	2.00 ± 0.10	1.25 ± 0.10	$0.60 (\pm 0.10)$	$0.5 \pm 0.2 / - 0.3$
				$0.85 (\pm 0.10)$	
				$1.25 (\pm 0.10)$	
31	1206	3.20 ± 0.20	1.60 ± 0.20	$0.85 (\pm 0.15)$	0.5 ± 0.3
				$1.15 (\pm 0.10)$	
				$1.60 (\pm 0.20)$	

Capacitance Table (Automotive Capacitors)

L x W[EIA]	0402(05)		0603(10)		0805(21)	
Part Number	COG(C)					
Rated V (Code)	50 (B)	100 (C)	50 (B)	100 (C)	50 (B)	100 (C)
Capacitance -pF- (Capacitance part numbering code) and T (mm) Dimension (T Dimension part numbering code)						
10pF(100)	0.50 (5)	0.50 (5)	0.80 (8)	0.80 (8)	0.60 (6)	0.60 (6)
12pF(120)						
15pF(150)						
18pF(180)						
22pF(220)						
27pF(270)						
33pF(330)						
39pF(390)						
47pF(470)						
56pF(560)						
68pF(680)						
82pF(820)			0.80 (8)			0.60 (6)
100pF(101)						
120pF(151)						
150pF(151)						
180pF(181)						
220pF(221)						
270pF(271)						
330pF(331)						
390pF(391)						
470pF(471)						
560pF(561)						0.85 (C)
680pF(681)						
820pF(182)						
1000pF(102)					1.25 (F)	1.25 (F)
1200pF(122)					0.85 (C)	0.85 (C)
1500pF(152)						
1800pF(182)						
2200pF(222)						
2700pF(272)						
3300pF(332)					1.25 (F)	
3900pF(392)						
4700pF(472)						
5600pF(562)						
6800pF(682)						
8200pF(822)						
10000pF(103)						
12000pF(123)						
15000pF(153)						

COG(C)

Part Numbering
System

General
Capacitors

Ultra High
Capacitors

Super Small
Capacitors

High Voltage
Capacitors

Camera Strobe
Circuit Capacitors

Array Type
Capacitors

Low ESL
Capacitors

Reliability Test
Condition

Premium Capacitors
for Automotive
Applications

Packaging
Specification

Application Manual
for Surface Mounting

Product Line Up (Automotive Capacitors)

Part Number	TC Code	Temperature Characteristics	Rated Voltage (Vdc)	Size L × W (mm)	Capacitance	Capacitance Tolerance	Thickness Max. (mm)
CL05C100JB5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.00 × 0.50	10pF	±5%	0.55
CL05C120JB5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.00 × 0.50	12pF	±5%	0.55
CL05C180JB5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.00 × 0.50	18pF	±5%	0.55
CL05C220JB5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.00 × 0.50	22pF	±5%	0.55
CL05C330JB5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.00 × 0.50	33pF	±5%	0.55
CL05C390JB5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.00 × 0.50	39pF	±5%	0.55
CL05C470JB5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.00 × 0.50	47pF	±5%	0.55
CL05C560JB5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.00 × 0.50	56pF	±5%	0.55
CL05C680JB5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.00 × 0.50	68pF	±5%	0.55
CL05C820JB5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.00 × 0.50	82pF	±5%	0.55
CL05C101JB5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.00 × 0.50	100pF	±5%	0.55
CL05C151JB5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.00 × 0.50	150pF	±5%	0.55
CL05C221JB5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.00 × 0.50	220pF	±5%	0.55
CL05C100JC5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	100	1.00 × 0.50	10pF	±5%	0.55
CL05C120JC5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	100	1.00 × 0.50	12pF	±5%	0.55
CL05C180JC5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	100	1.00 × 0.50	18pF	±5%	0.55
CL05C220JC5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	100	1.00 × 0.50	22pF	±5%	0.55
CL05C330JC5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	100	1.00 × 0.50	33pF	±5%	0.55
CL05C390JC5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	100	1.00 × 0.50	39pF	±5%	0.55
CL05C470JC5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	100	1.00 × 0.50	47pF	±5%	0.55
CL05C560JC5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	100	1.00 × 0.50	56pF	±5%	0.55
CL05C680JC5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	100	1.00 × 0.50	68pF	±5%	0.55
CL05C820JC5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	100	1.00 × 0.50	82pF	±5%	0.55
CL05C101JC5*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	100	1.00 × 0.50	100pF	±5%	0.55
CL10C100JB8*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.60 × 0.80	10pF	±5%	0.90
CL10C120JB8*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.60 × 0.80	12pF	±5%	0.90
CL10C180JB8*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.60 × 0.80	18pF	±5%	0.90
CL10C220JB8*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.60 × 0.80	22pF	±5%	0.90
CL10C330JB8*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.60 × 0.80	33pF	±5%	0.90
CL10C390JB8*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.60 × 0.80	39pF	±5%	0.90
CL10C470JB8*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.60 × 0.80	47pF	±5%	0.90
CL10C560JB8*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.60 × 0.80	56pF	±5%	0.90
CL10C680JB8*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.60 × 0.80	68pF	±5%	0.90
CL10C820JB8*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.60 × 0.80	82pF	±5%	0.90
CL10C101JB8*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.60 × 0.80	100pF	±5%	0.90
CL10C151JB8*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.60 × 0.80	150pF	±5%	0.90
CL10C221JB8*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.60 × 0.80	220pF	±5%	0.90
CL10C331JB8*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.60 × 0.80	330pF	±5%	0.90
CL10C471JB8*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.60 × 0.80	470pF	±5%	0.90
CL10C681JB8*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	1.60 × 0.80	680pF	±5%	0.90

*mark means design code. If you want more information, Please check with our sales representatives or product engineers.

※ □mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Product Line Up (Automotive Capacitors)

Part Number	TC Code	Temperature Characteristics	Rated Voltage (Vdc)	Size L × W (mm)	Capacitance	Capacitance Tolerance	Thickness Max. (mm)
CL10C102JB8*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	50	1.60 × 0.80	1.0nF	±5%	0.90
CL10C100JC8*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	1.60 × 0.80	10pF	±5%	0.90
CL10C120JC8*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	1.60 × 0.80	12pF	±5%	0.90
CL10C180JC8*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	1.60 × 0.80	18pF	±5%	0.90
CL10C220JC8*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	1.60 × 0.80	22pF	±5%	0.90
CL10C330JC8*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	1.60 × 0.80	33pF	±5%	0.90
CL10C390JC8*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	1.60 × 0.80	39pF	±5%	0.90
CL10C470JC8*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	1.60 × 0.80	47pF	±5%	0.90
CL10C560JC8*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	1.60 × 0.80	56pF	±5%	0.90
CL10C680JC8*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	1.60 × 0.80	68pF	±5%	0.90
CL10C820JC8*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	1.60 × 0.80	82pF	±5%	0.90
CL10C101JC8*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	1.60 × 0.80	100pF	±5%	0.90
CL21C100JB6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	50	2.00 × 1.25	10pF	±5%	0.70
CL21C120JB6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	50	2.00 × 1.25	12pF	±5%	0.70
CL21C180JB6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	50	2.00 × 1.25	18pF	±5%	0.70
CL21C220JB6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	50	2.00 × 1.25	22pF	±5%	0.70
CL21C330JB6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	50	2.00 × 1.25	33pF	±5%	0.70
CL21C390JB6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	50	2.00 × 1.25	39pF	±5%	0.70
CL21C470JB6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	50	2.00 × 1.25	47pF	±5%	0.70
CL21C560JB6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	50	2.00 × 1.25	56pF	±5%	0.70
CL21C680JB6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	50	2.00 × 1.25	68pF	±5%	0.70
CL21C820JB6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	50	2.00 × 1.25	82pF	±5%	0.70
CL21C101JB6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	50	2.00 × 1.25	100pF	±5%	0.70
CL21C151JB6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	50	2.00 × 1.25	150pF	±5%	0.70
CL21C221JB6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	50	2.00 × 1.25	220pF	±5%	0.70
CL21C331JB6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	50	2.00 × 1.25	330pF	±5%	0.70
CL21C471JBC*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	50	2.00 × 1.25	470pF	±5%	0.95
CL21C681JBC*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	50	2.00 × 1.25	680pF	±5%	0.95
CL21C102JBC*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	50	2.00 × 1.25	1.0nF	±5%	0.95
CL21C102JBF*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	50	2.00 × 1.25	1.0nF	±5%	1.35
CL21C100JC6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00 × 1.25	10pF	±5%	0.70
CL21C120JC6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00 × 1.25	12pF	±5%	0.70
CL21C180JC6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00 × 1.25	18pF	±5%	0.70
CL21C220JC6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00 × 1.25	22pF	±5%	0.70
CL21C330JC6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00 × 1.25	33pF	±5%	0.70
CL21C390JC6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00 × 1.25	39pF	±5%	0.70
CL21C470JC6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00 × 1.25	47pF	±5%	0.70
CL21C560JC6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00 × 1.25	56pF	±5%	0.70
CL21C680JC6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00 × 1.25	68pF	±5%	0.70
CL21C820JC6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00 × 1.25	82pF	±5%	0.70
CL21C101JC6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00 × 1.25	100pF	±5%	0.70
CL21C151JC6*PN□	COG(EIA)	±30ppm/°C(-55~+125°C)	100	2.00 × 1.25	150pF	±5%	0.70

*mark means design code. If you want more information, Please check with our sales representatives or product engineers.

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Part Numbering
SystemGeneral
CapacitorsUltra High
CapacitorsSuper Small
CapacitorsHigh Voltage
CapacitorsCamera Strobe
Circuit CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

Product Line Up (Automotive Capacitors)

Part Number	TC Code	Temperature Characteristics	Rated Voltage (Vdc)	Size L × W (mm)	Capacitance	Capacitance Tolerance	Thickness Max. (mm)
CL21C221JC6*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	100	2.00 × 1.25	220pF	±5%	0.70
CL21C331JC6*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	100	2.00 × 1.25	330pF	±5%	0.70
CL21C471JCC*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	100	2.00 × 1.25	470pF	±5%	0.95
CL21C681JCC*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	100	2.00 × 1.25	680pF	±5%	0.95
CL21C102JCC*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	100	2.00 × 1.25	1.0nF	±5%	0.95
CL21C102JCF*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	100	2.00 × 1.25	1.0nF	±5%	1.35
CL21C122JBC*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	2.00 × 1.25	1.2nF	±5%	0.95
CL21C152JBC*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	2.00 × 1.25	1.5nF	±5%	0.95
CL21C182JBC*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	2.00 × 1.25	1.8nF	±5%	0.95
CL21C222JBC*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	2.00 × 1.25	2.2nF	±5%	0.95
CL21C272JBC*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	2.00 × 1.25	2.7nF	±5%	0.95
CL21C332JBC*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	2.00 × 1.25	3.3nF	±5%	0.95
CL21C392JBC*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	2.00 × 1.25	3.9nF	±5%	0.95
CL21C472JBC*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	2.00 × 1.25	4.7nF	±5%	0.95
CL21C562JBC*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	2.00 × 1.25	5.6nF	±5%	0.95
CL21C122JBF*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	2.00 × 1.25	1.2nF	±5%	1.35
CL21C152JBF*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	2.00 × 1.25	1.5nF	±5%	1.35
CL21C182JBF*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	2.00 × 1.25	1.8nF	±5%	1.35
CL21C222JBF*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	2.00 × 1.25	2.2nF	±5%	1.35
CL21C272JBF*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	2.00 × 1.25	2.7nF	±5%	1.35
CL21C332JBF*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	2.00 × 1.25	3.3nF	±5%	1.35
CL21C392JBF*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	2.00 × 1.25	3.9nF	±5%	1.35
CL21C472JBF*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	2.00 × 1.25	4.7nF	±5%	1.35
CL21C562JBF*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	2.00 × 1.25	5.6nF	±5%	1.35
CL21C682JBF*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	2.00 × 1.25	6.8nF	±5%	1.35
CL21C822JBF*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	2.00 × 1.25	8.2nF	±5%	1.35
CL21C103JBF*PN□	COG(EIA)	±30ppm/°C (-55~+125°C)	50	2.00 × 1.25	10.0nF	±5%	1.35

*mark means design code. If you want more information, Please check with our sales representatives or product engineers.

※ □mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Capacitance Table (Automotive Capacitors)

Size	0603(10)				0805(21)				1206(31)			
TC	X7R(B)											
Rated V (Code)	16 (O)	25 (A)	50 (B)	100 (C)	16 (O)	25 (A)	50 (B)	100 (C)	16 (O)	25 (A)	50 (B)	100 (C)
Capacitance (Capacitance part numbering code) and T (mm) Dimension (T Dimension part numbering code)												
220pF(221)												
470pF(471)												
1.0nF(102)				0.80 (8)								
2.2nF(222)												
4.7nF(472)							0.60 (6)	0.60 (6)				
10nF(103)												
15nF(153)			0.80 (8)									
22nF(223)												
33nF(333)		0.80 (8)										
47nF(473)	0.80 (8)					0.85 (C)	0.85 (C)	0.85 (C)				
68nF(683)												
100nF(104)					0.85 (C)		1.25 0.85 (F) (C)	1.25 0.85 (F) (C)				
150nF(154)											1.15 (P)	
220nF(224)							1.25 (F)					
330nF(334)					1.25 (F)	1.25 (F)				0.85 (C)		
470nF(474)												
680nF(684)												
1000nF(105)									1.15 (P)	1.15 (P)	1.60 (H)	
1500nF(155)									1.60 (H)	1.60 (H)		
2200nF(225)												

:X7R(B)

Part Numbering
System

General
Capacitors

Ultra High
Capacitors

Super Small
Capacitors

High Voltage
Capacitors

Camera Strobe
Circuit Capacitors

Array Type
Capacitors

Low ESL
Capacitors

Reliability Test
Condition

Premium Capacitors
for Automotive
Applications

Packaging
Specification

Application Manual
for Surface Mounting

Product Line Up (Automotive Capacitors)

Part Number	TC Code	Temperature Characteristics	Rated Voltage (Vdc)	Size L × W (mm)	Capacitance	Capacitance Tolerance	Thickness Max. (mm)
CL10B473KO8*PN □	X7R(EIA)	± 15%(-55~+125℃)	16	1.60 × 0.80	47nF	± 10%	0.90
CL10B683KO8*PN □	X7R(EIA)	± 15%(-55~+125℃)	16	1.60 × 0.80	68nF	± 10%	0.90
CL10B104KO8*PN □	X7R(EIA)	± 15%(-55~+125℃)	16	1.60 × 0.80	100nF	± 10%	0.90
CL10B103KA8*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	1.60 × 0.80	10nF	± 10%	0.90
CL10B153KA8*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	1.60 × 0.80	15nF	± 10%	0.90
CL10B223KA8*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	1.60 × 0.80	22nF	± 10%	0.90
CL10B333KA8*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	1.60 × 0.80	33nF	± 10%	0.90
CL10B473KA8*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	1.60 × 0.80	47nF	± 10%	0.90
CL10B683KA8*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	1.60 × 0.80	68nF	± 10%	0.90
CL10B104KA8*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	1.60 × 0.80	100nF	± 10%	0.90
CL10B102KB8*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	1.60 × 0.80	1.0nF	± 10%	0.90
CL10B152KB8*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	1.60 × 0.80	1.5nF	± 10%	0.90
CL10B222KB8*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	1.60 × 0.80	2.2nF	± 10%	0.90
CL10B332KB8*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	1.60 × 0.80	3.3nF	± 10%	0.90
CL10B472KB8*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	1.60 × 0.80	4.7nF	± 10%	0.90
CL10B682KB8*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	1.60 × 0.80	6.8nF	± 10%	0.90
CL10B103KB8*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	1.60 × 0.80	10nF	± 10%	0.90
CL10B153KB8*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	1.60 × 0.80	15nF	± 10%	0.90
CL10B223KB8*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	1.60 × 0.80	22nF	± 10%	0.90
CL10B333KB8*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	1.60 × 0.80	33nF	± 10%	0.90
CL10B473KB8*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	1.60 × 0.80	47nF	± 10%	0.90
CL10B683KB8*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	1.60 × 0.80	68nF	± 10%	0.90
CL10B104KB8*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	1.60 × 0.80	100nF	± 10%	0.90
CL10B102KC8*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	1.60 × 0.80	1.0nF	± 10%	0.90
CL10B152KC8*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	1.60 × 0.80	1.5nF	± 10%	0.90
CL10B222KC8*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	1.60 × 0.80	2.2nF	± 10%	0.90
CL10B332KC8*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	1.60 × 0.80	3.3nF	± 10%	0.90
CL10B472KC8*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	1.60 × 0.80	4.7nF	± 10%	0.90
CL10B682KC8*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	1.60 × 0.80	6.8nF	± 10%	0.90
CL10B103KC8*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	1.60 × 0.80	10nF	± 10%	0.90
CL10B221KC8*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	1.60 × 0.80	220pF	± 10%	0.90
CL10B331KC8*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	1.60 × 0.80	330pF	± 10%	0.90
CL10B471KC8*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	1.60 × 0.80	470pF	± 10%	0.90

*mark means design code. If you want more information , Please check with our sales representatives or product engineers.

※ □mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Product Line Up (Automotive Capacitors)

Part Number	TC Code	Temperature Characteristics	Rated Voltage (Vdc)	Size L × W (mm)	Capacitance	Capacitance Tolerance	Thickness Max. (mm)
CL10B681KC8*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	1.60 × 0.80	680pF	± 10%	0.90
CL21B104KOC*PN □	X7R(EIA)	± 15%(-55~+125℃)	16	2.00 × 1.25	100nF	± 10%	0.95
CL21B154KOF*PN □	X7R(EIA)	± 15%(-55~+125℃)	16	2.00 × 1.25	150nF	± 10%	1.35
CL21B224KOF*PN □	X7R(EIA)	± 15%(-55~+125℃)	16	2.00 × 1.25	220nF	± 10%	1.35
CL21B334KOF*PN □	X7R(EIA)	± 15%(-55~+125℃)	16	2.00 × 1.25	330nF	± 10%	1.35
CL21B474KOF*PN □	X7R(EIA)	± 15%(-55~+125℃)	16	2.00 × 1.25	470nF	± 10%	1.35
CL21B473KAC*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	2.00 × 1.25	47nF	± 10%	0.95
CL21B683KAC*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	2.00 × 1.25	68nF	± 10%	0.95
CL21B104KAC*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	2.00 × 1.25	100nF	± 10%	0.95
CL21B154KAF*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	2.00 × 1.25	150nF	± 10%	1.35
CL21B224KAF*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	2.00 × 1.25	220nF	± 10%	1.35
CL21B334KAF*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	2.00 × 1.25	330nF	± 10%	1.35
CL21B474KAF*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	2.00 × 1.25	470nF	± 10%	1.35
CL21B102KB6*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	2.00 × 1.25	1.0nF	± 10%	0.70
CL21B152KB6*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	2.00 × 1.25	1.5nF	± 10%	0.70
CL21B222KB6*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	2.00 × 1.25	2.2nF	± 10%	0.70
CL21B332KB6*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	2.00 × 1.25	3.3nF	± 10%	0.70
CL21B472KB6*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	2.00 × 1.25	4.7nF	± 10%	0.70
CL21B682KB6*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	2.00 × 1.25	6.8nF	± 10%	0.70
CL21B103KB6*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	2.00 × 1.25	10nF	± 10%	0.70
CL21B153KB6*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	2.00 × 1.25	15nF	± 10%	0.70
CL21B223KB6*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	2.00 × 1.25	22nF	± 10%	0.70
CL21B333KBC*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	2.00 × 1.25	33nF	± 10%	0.95
CL21B473KBC*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	2.00 × 1.25	47nF	± 10%	0.95
CL21B683KBC*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	2.00 × 1.25	68nF	± 10%	0.95
CL21B104KBC*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	2.00 × 1.25	100nF	± 10%	0.95
CL21B104KBF*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	2.00 × 1.25	100nF	± 10%	1.35
CL21B154KBF*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	2.00 × 1.25	150nF	± 10%	1.35
CL21B224KBF*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	2.00 × 1.25	220nF	± 10%	1.35
CL21B334KBF*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	2.00 × 1.25	330nF	± 10%	1.35
CL21B474KBF*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	2.00 × 1.25	470nF	± 10%	1.35
CL21B102KC6*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	2.00 × 1.25	1.0nF	± 10%	0.70
CL21B152KC6*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	2.00 × 1.25	1.5nF	± 10%	0.70

*mark means design code. If you want more information, Please check with our sales representatives or product engineers.

※ □ mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Part Numbering System

General Capacitors

Ultra High Capacitors

Super Small Capacitors

High Voltage Capacitors

Camera Strobe Circuit Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition

Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

Product Line Up (Automotive Capacitors)

Part Number	TC Code	Temperature Characteristics	Rated Voltage (Vdc)	Size L × W (mm)	Capacitance	Capacitance Tolerance	Thickness Max. (mm)
CL21B222KC6*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	2.00 × 1.25	2.2nF	± 10%	0.70
CL21B332KC6*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	2.00 × 1.25	3.3nF	± 10%	0.70
CL21B472KC6*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	2.00 × 1.25	4.7nF	± 10%	0.70
CL21B682KC6*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	2.00 × 1.25	6.8nF	± 10%	0.70
CL21B103KC6*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	2.00 × 1.25	10nF	± 10%	0.70
CL21B153KC6*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	2.00 × 1.25	15nF	± 10%	0.70
CL21B223KC6*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	2.00 × 1.25	22nF	± 10%	0.70
CL21B333KCC*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	2.00 × 1.25	33nF	± 10%	0.95
CL21B473KCC*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	2.00 × 1.25	47nF	± 10%	0.95
CL21B683KCC*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	2.00 × 1.25	68nF	± 10%	0.95
CL21B104KCC*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	2.00 × 1.25	100nF	± 10%	0.95
CL21B104KCF*PN □	X7R(EIA)	± 15%(-55~+125℃)	100	2.00 × 1.25	100nF	± 10%	1.35
CL31B105KOP*PN □	X7R(EIA)	± 15%(-55~+125℃)	16	3.20 × 1.60	1.0μF	± 10%	1.25
CL31B155KOH*PN □	X7R(EIA)	± 15%(-55~+125℃)	16	3.20 × 1.60	1.5μF	± 10%	1.80
CL31B225KOH*PN □	X7R(EIA)	± 15%(-55~+125℃)	16	3.20 × 1.60	2.2μF	± 10%	1.80
CL31B105KAP*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	3.20 × 1.60	1.0μF	± 10%	1.25
CL31B155KAH*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	3.20 × 1.60	1.5μF	± 10%	1.80
CL31B225KAH*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	3.20 × 1.60	2.2μF	± 10%	1.80
CL31B224KAC*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	3.20 × 1.60	220nF	± 10%	1.00
CL31B334KAC*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	3.20 × 1.60	330nF	± 10%	1.00
CL31B474KAC*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	3.20 × 1.60	470nF	± 10%	1.00
CL31B684KAP*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	3.20 × 1.60	680nF	± 10%	1.25
CL31B104KBP*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	3.20 × 1.60	100nF	± 10%	1.25
CL31B154KBP*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	3.20 × 1.60	150nF	± 10%	1.25
CL31B224KBP*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	3.20 × 1.60	220nF	± 10%	1.25
CL31B334KBH*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	3.20 × 1.60	330nF	± 10%	1.80
CL31B474KBH*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	3.20 × 1.60	470nF	± 10%	1.80
CL21B684KOF*PN □	X7R(EIA)	± 15%(-55~+125℃)	16	2.00 × 1.25	680nF	± 10%	1.35
CL21B105KOF*PN □	X7R(EIA)	± 15%(-55~+125℃)	16	2.00 × 1.25	1.0μF	± 10%	1.35
CL21B684KAF*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	2.00 × 1.25	680nF	± 10%	1.35
CL21B105KAF*PN □	X7R(EIA)	± 15%(-55~+125℃)	25	2.00 × 1.25	1.0μF	± 10%	1.35
CL31B684KBH*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	3.20 × 1.60	680nF	± 10%	1.80
CL31B105KBH*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	3.20 × 1.60	1.0μF	± 10%	1.80
CL31B155KBH*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	3.20 × 1.60	1.5μF	± 10%	1.80
CL31B225KBH*PN □	X7R(EIA)	± 15%(-55~+125℃)	50	3.20 × 1.60	2.2μF	± 10%	1.80


*mark means design code. If you want more information , Please check with our sales representatives or product engineers.

※ □mark means packaging code. If you want to learn the code or quantity in detail, please see p 81.

Reliability Test Condition (Automotive Capacitors)

No	Item		Performance	Test Condition
1	Pre-and Post-Stress Electrical Test		-	
2	High Temperature Exposure	Appearance	No abnormal exterior appearance	Unpowered, 1000hrs@T=150°C Measurement at 24±2hrs after test conclusion
		Capacitance Change	CLASS I Within ±2.5% or 0.25pF, (Whichever is larger)	
			CLASS II Within ±10%	
		Q	CLASS I Capacitance ≥ 30pF : Q ≥ 1,000 < 30pF : Q ≥ 400 + 20 × C (C : Capacitance)	
		Tanδ	CLASS II Rated Voltage ≥ 25V : 0.03 max ≥ 16V : 0.05 max ≥ 10V : 0.075max	
3	Temperature Cycling	IR	More than 10,000 $\mu\Omega$ or 500 $\mu\Omega$ × μF (Whichever is smaller)	1000Cycles Measurement at 24±2hrs after test conclusion
		Appearance	No abnormal exterior appearance	
		Capacitance Change	CLASS I Within ±2.5% or 0.25pF, (Whichever is larger)	
			CLASS II Within ±10%	
		Q	CLASS I Capacitance ≥ 30pF : Q ≥ 1,000 < 30pF : Q ≥ 400 + 20 × C (C : Capacitance)	
4	Destructive Physical Analysis	Tanδ	CLASS II Rated Voltage ≥ 25V : 0.03 max ≥ 16V : 0.05 max ≥ 10V : 0.075max	Per EIA 469
		IR	More than 10,000 $\mu\Omega$ or 500 $\mu\Omega$ × μF (Whichever is smaller)	
		Appearance	No abnormal exterior appearance	
		Capacitance Change	CLASS I Within ±2.5% or 0.25pF, (Whichever is larger)	
		CLASS II Within ±12.5%		
5	Moisture Resistance	Q	CLASS I Capacitance ≥ 30pF : Q ≥ 350 < 10pF : Q ≥ 275 + (5/2) × C < 10pF : Q ≥ 200 + 10 × C (C : Capacitance)	10Cycles, t=24hrs/cycle Heat (25~65°C) and humidity (80~98%), Unpowered measurement at 24±2hrs after test conclusion
		Tanδ	CLASS II Rated Voltage ≥ 25V : 0.03 max ≥ 16V : 0.05 max ≥ 10V : 0.075max	
		IR	More than 10,000 $\mu\Omega$ or 500 $\mu\Omega$ × μF (Whichever is smaller)	
		Appearance	No abnormal exterior appearance	
		Capacitance Change	CLASS I Within ±2.5% or 0.25pF, (Whichever is larger)	

Step	Temperature(°C)	Time(min.)
1	Min. operating Temp. ±2	15±3
2	25±2	1
3	Max. operating Temp. ±2	15±3
4	25±2	1

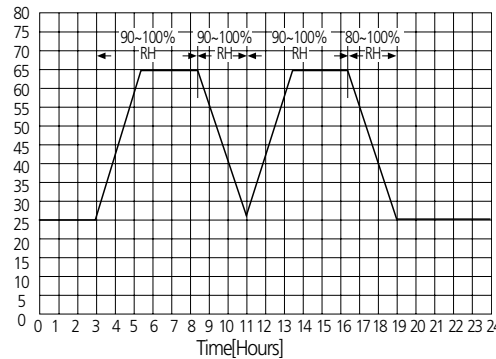Part Numbering
SystemGeneral
CapacitorsUltra High
CapacitorsSuper Small
CapacitorsHigh Voltage
CapacitorsCamera Strobe
Circuit CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting

No	Item		Performance		Test Condition									
6	Biased Humidity	Appearance		No abnormal exterior appearance		1000hrs 85℃/85%RH, Rated Voltate and 1.3~1.5V, (add 100kohm resistor) Measurement at 24±2hrs after test conclusion The charge/discharge current is less than 50mA.								
		Capacitance Change	CLASS I	Within ±2.5% or 0.25pF, (Whichever is larger)										
			CLASS II	Within ±12.5%										
		Q	CLASS I	Capacitance ≥ 30pF : Q ≥ 200 <30pF : Q ≥ 100 +(10/3)×C (C : Capacitance)										
		Tanδ	CLASS II	Rated Voltage ≥ 25V : 0.035 max ≥ 16V : 0.05 max ≥ 10V : 0.075max										
	IR		More than 500 MΩ or 25 MΩ × μF (Whichever is Smaller)											
7	High Temperature Operating Life	Appearance		No abnormal exterior appearance		1000hrs @ TA=125℃, 200% Rated Voltage, Measurement at 24±2hrs after test conclusion The charge/discharge current is less than 50mA.								
		Capacitance Change	CLASS I	Within ±3.0% or 0.3pF, (Whichever is larger)										
			CLASS II	Within ±12.5%										
		Q	CLASS I	Capacitance ≥ 30pF : Q ≥ 350 ≥ 10pF : Q ≥ 275+(5/2)×C < 10pF : Q ≥ 200+10×C (C : Capacitance)										
		Tanδ	CLASS II	Rated Voltage ≥ 25V : 0.035 max ≥ 16V : 0.05 max ≥ 10V : 0.075max										
	IR		More than 1,000 MΩ or 50 MΩ × μF (Whichever is smaller)											
8	External Visual		No abnormal exterior appearance		Microscope (x10)									
9	Physical Dimensions		Within the specified dimensions		Using the calipers									
10	Mechanical Shock	Appearance		No abnormal exterior appearance		Three shocks in each direction should be applied along 3 mutually perpendicular axes of the test specimen (18 shocks) <table><tr><td>Peakvalue</td><td>Duration</td><td>Wave</td></tr><tr><td>1,500G</td><td>0.5ms</td><td>Half sine</td></tr></table>			Peakvalue	Duration	Wave	1,500G	0.5ms	Half sine
		Peakvalue	Duration	Wave										
		1,500G	0.5ms	Half sine										
		Capacitance Change	CLASS I	Within ±2.5% or 0.25pF, (Whichever is larger)										
			CLASS II	Within ±10%										
Q	CLASS I	Capacitance ≥ 30pF : Q ≥ 1,000 <30pF : Q ≥ 400 +20×C (C : Capacitance)												
Tanδ	CLASS II	Rated Voltage ≥ 25V : 0.025 max ≥ 16V : 0.035 max ≥ 10V : 0.05max												
	IR		More than 10,000 MΩ or 500 MΩ × μF (Whichever is smaller)											

No	Item		Performance	Test Condition
11	Vibration	Appearance	No abnormal exterior appearance	5g's for 20min., 12cycles each of 3 orientations, Use 8" × 5" PCB 0.031" Thick 7 secure points on one long side and 2 secure points at corners of opposite sides. Parts mounted within 2" from any secure point. Test from 10~2000Hz.
		Capacitance Change	CLASS I Within $\pm 2.5\%$ or 0.25pF, (Whichever is larger)	
			CLASS II Within $\pm 10\%$	
		Q	CLASS I Capacitance $\geq 30\text{pF}$: $Q \geq 1,000$ $< 30\text{pF}$: $Q \geq 400 + 20 \times C$ (C : Capacitance)	
		Tan δ	CLASS II Rated Voltage $\geq 25\text{V}$: 0.025 max $\geq 16\text{V}$: 0.035 max $\geq 10\text{V}$: 0.05max	
12	Resistance to Solder Heat	IR	More than 10,000 μS or 500 μS $\times \mu\text{F}$ (Whichever is smaller)	Solder pot : $260 \pm 5^\circ\text{C}$, 10 $\pm$ 1sec.
		Appearance	No abnormal exterior appearance	
		Capacitance Change	CLASS I Within $\pm 2.5\%$ or 0.25pF, (Whichever is larger)	
			CLASS II Within $\pm 10\%$	
		Q	CLASS I Capacitance $\geq 30\text{pF}$: $Q \geq 1,000$ $< 30\text{pF}$: $Q \geq 400 + 20 \times C$ (C : Capacitance)	
13	Thermal Shock	Tan δ	CLASS II Rated Voltage $\geq 25\text{V}$: 0.025 max $\geq 16\text{V}$: 0.035 max $\geq 10\text{V}$: 0.05max	-55 $^\circ\text{C}$ /+125 $^\circ\text{C}$ Note: Number of cycles required - 300, Maximum transfer time-20 sec, Dwell time-15min. Air-Air
		IR	More than 10,000 μS or 500 μS $\times \mu\text{F}$ (Whichever is smaller)	
		Appearance	No abnormal exterior appearance	
		Capacitance Change	CLASS I Within $\pm 2.5\%$ or 0.25pF, (Whichever is larger)	
			CLASS II Within $\pm 10\%$	
14	ESD	Q	CLASS I Capacitance $\geq 30\text{pF}$: $Q \geq 1,000$ $< 30\text{pF}$: $Q \geq 400 + 20 \times C$ (C : Capacitance)	AEC-Q200-002
		Tan δ	CLASS II Rated Voltage $\geq 25\text{V}$: 0.025 max $\geq 16\text{V}$: 0.035 max $\geq 10\text{V}$: 0.05max	
		IR	More than 10,000 μS or 500 μS $\times \mu\text{F}$ (Whichever is smaller)	
		Capacitance Change	CLASS I Within $\pm 2.5\%$ or 0.25pF, (Whichever is larger)	
			CLASS II Within $\pm 10\%$	
15	Thermal Shock	Appearance	No abnormal exterior appearance	-55 $^\circ\text{C}$ /+125 $^\circ\text{C}$ Note: Number of cycles required - 300, Maximum transfer time-20 sec, Dwell time-15min. Air-Air
		Capacitance Change	CLASS I Within $\pm 2.5\%$ or 0.25pF, (Whichever is larger)	
			CLASS II Within $\pm 10\%$	
		Q	CLASS I Capacitance $\geq 30\text{pF}$: $Q \geq 1,000$ $< 30\text{pF}$: $Q \geq 400 + 20 \times C$ (C : Capacitance)	
		Tan δ	CLASS II Rated Voltage $\geq 25\text{V}$: 0.025 max $\geq 16\text{V}$: 0.035 max $\geq 10\text{V}$: 0.05max	
16	Resistance to Solder Heat	IR	More than 10,000 μS or 500 μS $\times \mu\text{F}$ (Whichever is smaller)	Solder pot : $260 \pm 5^\circ\text{C}$, 10 $\pm$ 1sec.
		Appearance	No abnormal exterior appearance	
		Capacitance Change	CLASS I Within $\pm 2.5\%$ or 0.25pF, (Whichever is larger)	
			CLASS II Within $\pm 10\%$	
		Q	CLASS I Capacitance $\geq 30\text{pF}$: $Q \geq 1,000$ $< 30\text{pF}$: $Q \geq 400 + 20 \times C$ (C : Capacitance)	

Part Numbering System

General Capacitors

Ultra High Capacitors

Super Small Capacitors

High Voltage Capacitors

Camera Strobe Circuit Capacitors

Array Type Capacitors

Low ESL Capacitors

Reliability Test Condition


Premium Capacitors for Automotive Applications

Packaging Specification

Application Manual for Surface Mounting

No	Item		Performance	Test Condition																					
15	Solderability		95% of the terminations is to be soldered evenly and continuously	a) Preheat at 155℃ for 4 hours, Immerse in solder for 5s at 245±5℃ b) Steam aging for 8 hours, Immerse in solder for 5s at 245±5℃ c) Steam aging for 8 hours, Immerse in solder for 120s at 260±5℃ solder : a solution ethanol and rosin																					
16	Electrical Characterization	Capacitance		Within specified tolerance	The Capacitance /D.F. should be measured at 25℃, <table><tr><td>Class</td><td>Capacitance</td><td>Frequency</td><td>Vrms</td></tr><tr><td>Class I</td><td>1000pF↓</td><td>1MHz±10%</td><td>0.5~5Vrms</td></tr><tr><td>Class I</td><td>1000pF↑</td><td>1kHz±10%</td><td>1.0±0.2Vrms</td></tr><tr><td>Class II</td><td>10μF↓</td><td>1kHz±10%</td><td>1.0±0.2Vrms</td></tr><tr><td>Class II</td><td>10μF↑</td><td>120Hz±20%</td><td>0.5±0.1Vrms</td></tr></table>	Class	Capacitance	Frequency	Vrms	Class I	1000pF↓	1MHz±10%	0.5~5Vrms	Class I	1000pF↑	1kHz±10%	1.0±0.2Vrms	Class II	10μF↓	1kHz±10%	1.0±0.2Vrms	Class II	10μF↑	120Hz±20%	0.5±0.1Vrms
		Class	Capacitance	Frequency		Vrms																			
		Class I	1000pF↓	1MHz±10%		0.5~5Vrms																			
		Class I	1000pF↑	1kHz±10%		1.0±0.2Vrms																			
		Class II	10μF↓	1kHz±10%	1.0±0.2Vrms																				
		Class II	10μF↑	120Hz±20%	0.5±0.1Vrms																				
		Q	CLASS I	Capacitance ≥ 30pF : Q ≥ 1,000 < 30pF : Q ≥ 400 + 20 × C (C: Capacitance)	I.R. should be measured with a DC voltage not exceeding Rated Voltage @25℃, @125℃ for 60~120 sec. Dielectric Strength : 250% of the rated voltage for 1~5 seconds The charge/discharge current is less than 50mA.																				
		Tanδ	CLASS II	Rated Voltage ≥ 25V : 0.025 max ≥ 16V : 0.035 max ≥ 10V : 0.05max																					
		IR@25℃	CLASS I	More than 100,000MΩ or 1,000MΩ × μF (Whichever is smaller)																					
			CLASS II	More than 10,000MΩ or 500MΩ × μF (Whichever is smaller)																					
IR@125℃	CLASS I	More than 10,000MΩ or 100MΩ × μF (Whichever is smaller)																							
	CLASS II	More than 1,000MΩ or 10MΩ × μF (Whichever is smaller)																							
Dielectric Strength		No dielectric breakdown or mechanical breakdown																							
17	Board Flex	Appearance		Bending to the limit for 5 seconds Limit : Class I - 3mm Class II - 2mm																					
		Capacitance Change	CLASS I		Within ±5.0% or 0.5pF, (Whichever is larger)																				
			CLASS II		Within ±10%																				
18	Terminal Strength(SMD)	Appearance		18N, for 60±1 sec. * 0603(1608) –10N, 0402(1005) –2N																					
		Capacitance Change	CLASS I		Within ±2.5% or 0.25pF, (Whichever is larger)																				
			CLASS II		Within ±10%																				
19	Beam Load		Destruction value should be exceed Chip Length ≤2.5mm a) Chip Thickness > 0.5mm : 20N b) Chip Thickness ≤0.5mm : 8N Chip Length ≥ 3.2mm a) Chip Thickness ≥ 1.25mm : 54.5N b) Chip Thickness < 1.25mm : 15N	Beam speed Chip Length ≤2.5mm, 0.5±0.05mm/sec Chip Length ≥3.2mm, 2.5±0.25mm/sec																					
20	Capacitance Temperature Characteristics	Capacitance Change	CLASS I	0±30 ppm/℃	<table><tr><td>Step</td><td>Temperature(℃)</td><td>Time(min)</td></tr><tr><td>1</td><td>25 ± 2</td><td>1</td></tr><tr><td>2</td><td>Min. Operating Temp. ±2</td><td>15±3</td></tr><tr><td>3</td><td>25 ± 2</td><td>1</td></tr><tr><td>4</td><td>Max. Operating Temp. ±2</td><td>15±3</td></tr><tr><td>5</td><td>25 ± 2</td><td>1</td></tr></table>	Step	Temperature(℃)	Time(min)	1	25 ± 2	1	2	Min. Operating Temp. ±2	15±3	3	25 ± 2	1	4	Max. Operating Temp. ±2	15±3	5	25 ± 2	1		
			Step	Temperature(℃)		Time(min)																			
		1	25 ± 2	1																					
		2	Min. Operating Temp. ±2	15±3																					
		3	25 ± 2	1																					
4	Max. Operating Temp. ±2	15±3																							
5	25 ± 2	1																							
CLASS II	Within ±15%																								
Temperature Coefficient	CLASS I	0±30 ppm/℃																							
	Capacitance Drift	CLASS I	Within ±0.2% or 0.05pF, (Whichever is larger)																						

Cardboard Paper Tape(4mm)

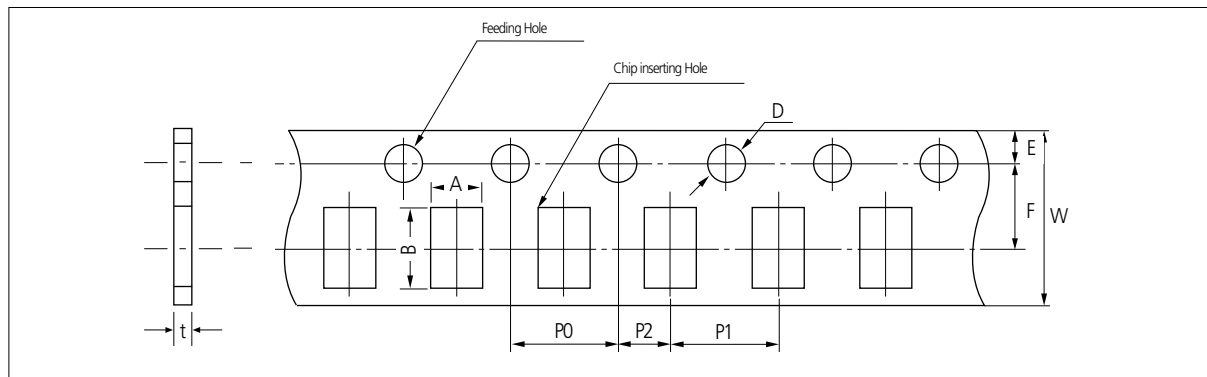


Unit: inch(mm)

Symbol Type		A	B	W	F	E	P1	P2	P0	D	t
Dimension	0504 (1410)	1.3 ±0.2	1.7 ±0.2	8.0 ±0.3	3.5 ±0.05	1.75 ±0.1	4.0 ±0.1	2.0 ±0.05	4.0 ±0.1	Ø1.5 +0.1/-0	1.1 Below
	0603 0306 (1608) (0816)	1.1 ±0.2	1.9 ±0.2								
	0805 0508 (2012) (1220)	1.6 ±0.2	2.4 ±0.2								
	1206 0612 (3216) (1632)	2.0 ±0.2	3.6 ±0.2								

Part Numbering
SystemGeneral
CapacitorsUltra High
CapacitorsSuper Small
CapacitorsHigh Voltage
CapacitorsCamera Strobe
Circuit CapacitorsArray Type
CapacitorsLow ESL
CapacitorsReliability Test
ConditionPremium Capacitors
for Automotive
ApplicationsPackaging
SpecificationApplication Manual
for Surface Mounting


Cardboard Paper Tape(2mm)

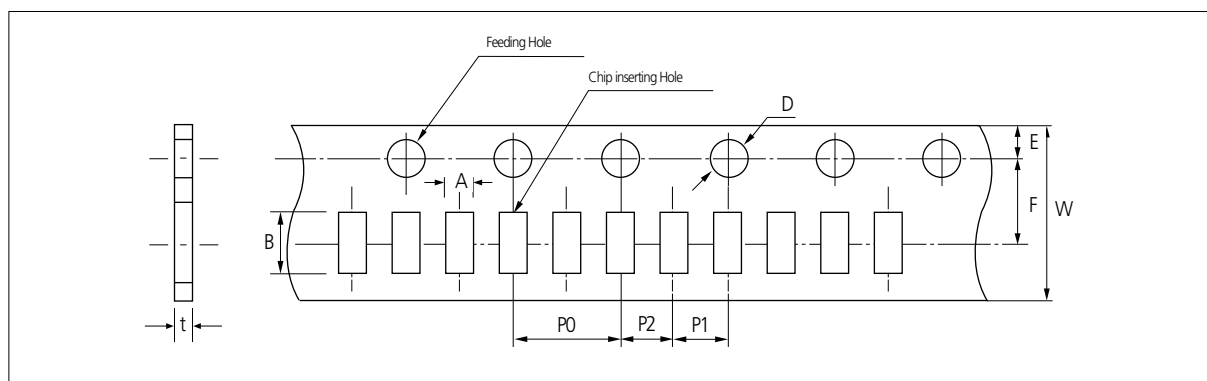

Unit: inch(mm)

Symbol Type		A	B	W	F	E	P1	P2	P0	D	t
Dimension	01005 (0402)	0.26 ±0.03	0.46 ±0.03	8.0 ±0.3	3.5 ±0.05	1.75 ±0.05	2.0 ±0.05	2.0 ±0.05	4.0 ±0.1	Ø1.550 ±0.02	0.26 ±0.03
	0201 (0603)	0.38 ±0.03	0.68 ±0.03			1.75 ±0.1	2.0 ±0.05	2.0 ±0.05	4.0 ±0.1	Ø1.5 +0.1/-0.03	0.37 ±0.03
	0402 (1005)	0.62 ±0.04	1.12 ±0.04								0.6 ±0.05
											0.37 ±0.05

Embossed Plastic Tape

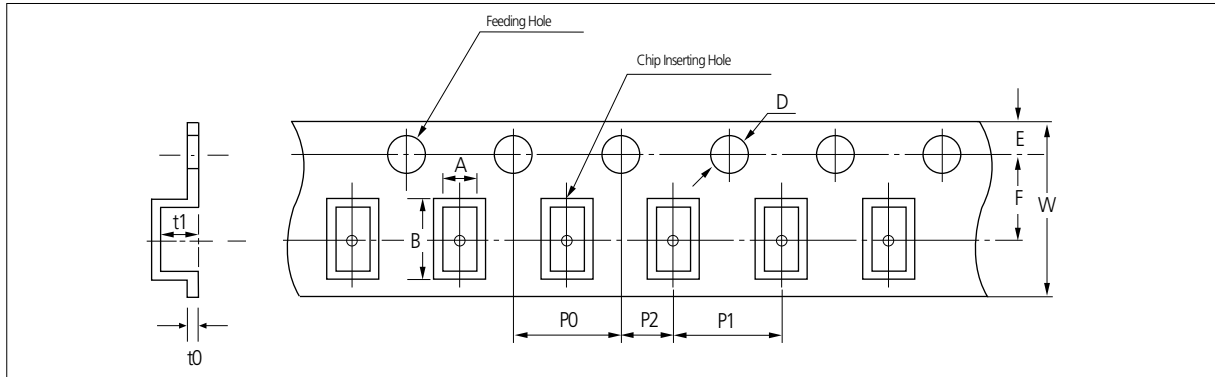


Unit: inch(mm)


Symbol		A	B	W	F	E	P1	P2	P0	D	t1	t0
Type												
Dimension	0603 (1608)	1.05 ±0.15	1.9 ±0.15	8.0 ±0.3	3.5 ±0.05	1.75 ±0.1	4.0 ±0.1	2.0 ±0.05	4.0 ±0.1	Ø1.5 +0.1/ - 0	2.8 max	0.6 BELOW
	0805 (2012)	1.45 ±0.2	2.3 ±0.2									
	1206 0612 (3216) (1632)	1.9 ±0.2	3.5 ±0.2									
	1210 (3225)	2.8 ±0.2	3.6 ±0.2									
	1808 (4520)	2.3 ±0.2	4.9 ±0.2	12.0 ±0.3	5.60 ±0.05	8.0 ±0.1						
	1812 (4532)	3.6 ±0.2	4.9 ±0.2									
	2220 (5750)	5.5 ±0.2	6.2 ±0.2					3.8 max				

Peeling off of Cover Tape

- $5 \text{ g.f} \leq \text{Peel off force} \leq 70 \text{ g.f}$

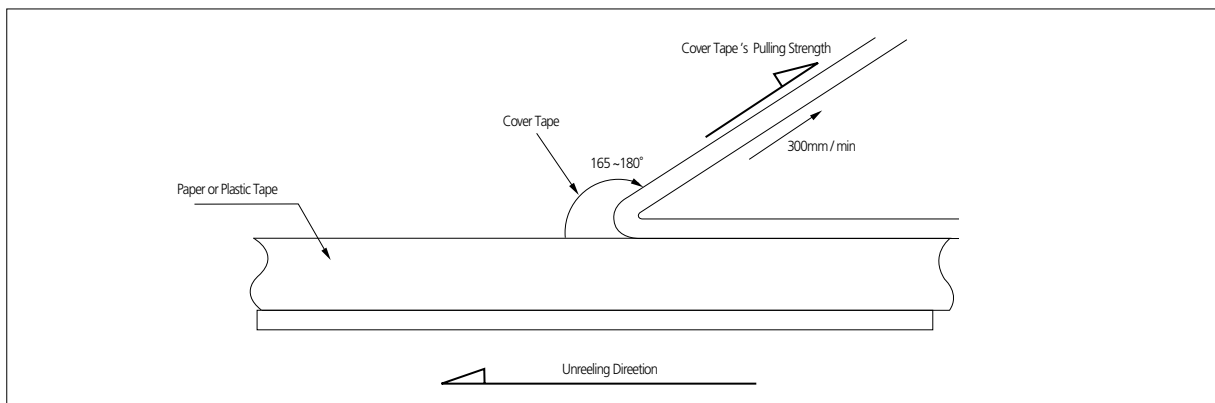

Taping Size

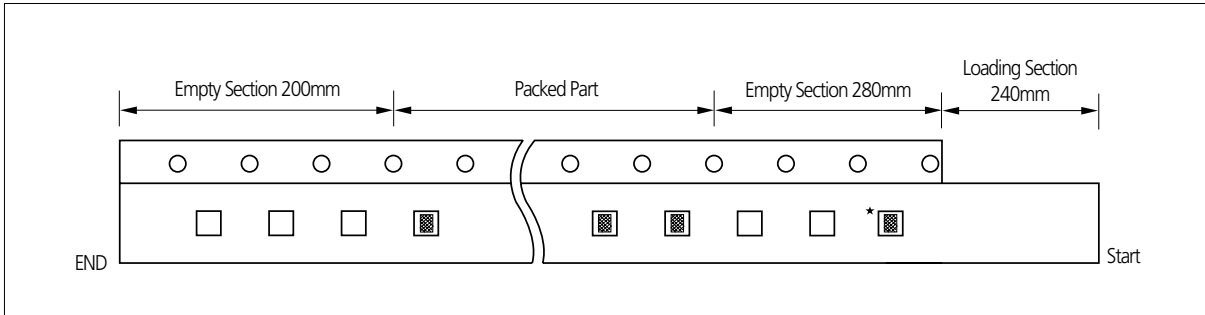

- The chip is only use for identifying the label and packaged products.
Please don't use the chip.

Unit: kpcs

Size	T code	Quantity & Packing Code								
		Paper Type					Plastic Type			
		C (7"reel)	H (7"reel)	O (10"reel)	D (13"reel)	L (13"reel)	E (7"reel)	G (7"reel)	F (13"reel)	S (10"reel)
01005(0402)	2	20	-	-	-	-	-	-	-	-
0201(0603)	3	10	15	30	50	-	-	-	-	-
0402(1005)	3	10	15	30	50	-	-	-	-	-
	5	10	-	30	50	-	-	-	-	-
0504(1410)	8	4	-	10	10	15	-	-	-	-
0603(1608)	5	4	-	30	50	-	-	-	-	-
	8	4	-	10	10	15	-	-	-	-
0604(1610)	D	-	-	-	-	-	3	-	10	6
0805(2012)	A, C	4	-	10	10	15	-	-	-	-
	E, F, Q	-	-	-	-	-	2	3	10	6
1206(3216)	C	4	-	10	10	15	-	-	-	-
	E, F, P	-	-	-	-	-	2	3	10	6
	H	-	-	-	-	-	2	-	8	4
1210(3225)	9, D, C, O	-	-	-	-	-	2	-	10	-
	E, F, M	-	-	-	-	-	2	-	10	-
	H, T	-	-	-	-	-	2	-	8	4
	I, U	-	-	-	-	-	2	-	4	-
	J, V	-	-	-	-	-	1	-	4	-
	S	-	-	-	-	-	2	-	8	-
1808(4520)	F	-	-	-	-	-	2	-	-	-
1812(4532)	F, H, I	-	-	-	-	-	1	-	4	-
	L, J	-	-	-	-	-	-	-	2	-
2220(5750)	H, I, J	-	-	-	-	-	-	-	2	-

Part Numbering
System

General
Capacitors

Ultra High
Capacitors

Super Small
Capacitors

High Voltage
Capacitors

Camera Strobe
Circuit Capacitors

Array Type
Capacitors

Low ESL
Capacitors

Reliability Test
Condition


Premium Capacitors
for Automotive
Applications

Packaging
Specification

Application Manual
for Surface Mounting

Reel Dimensions


Unit: mm

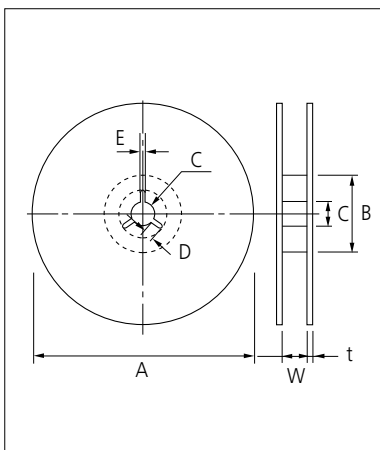

Symbol	Tape Width	A	B	C	D
7" Reel	8mm	$\varnothing 180+0/-3$	$\varnothing 60+1/-0$	$\varnothing 13\pm 0.3$	4 ± 0.2
	12mm	$\varnothing 180+0/-3$	$\varnothing 60+1/-0$	$\varnothing 13\pm 0.3$	4 ± 0.2
10" Reel	8mm	$\varnothing 258+0/-3$	$\varnothing 80+1/-0$	$\varnothing 13\pm 0.3$	4 ± 0.2
	12mm	$\varnothing 258+0/-3$	$\varnothing 80+1/-0$	$\varnothing 13\pm 0.3$	4 ± 0.2
13" Reel	8mm	$\varnothing 330\pm 2.0$	$\varnothing 80\pm 1.0$	$\varnothing 13\pm 0.3$	4 ± 0.2
	12mm	$\varnothing 330\pm 2.0$	$\varnothing 80\pm 1.0$	$\varnothing 13\pm 0.3$	4 ± 0.2
Symbol	Tape Width	E	W	t	
7" Reel	8mm	2.0 ± 0.5	9 ± 0.5	1.2 ± 0.2	
	12mm	2.0 ± 0.5	13 ± 0.5	1.2 ± 0.2	
10" Reel	8mm	2.0 ± 0.5	9 ± 0.5	1.8 ± 0.2	
	12mm	2.0 ± 0.5	13 ± 0.5	1.8 ± 0.2	
13" Reel	8mm	2.0 ± 0.5	9 ± 0.5	2.2 ± 0.2	
	12mm	2.0 ± 0.5	13 ± 0.5	2.2 ± 0.2	

Bulk Case Packaging

- Bulk case packaging can reduce the stock space and transportation costs.
- The bulk feeding system can increase the productivity.
- It can eliminate the components loss.

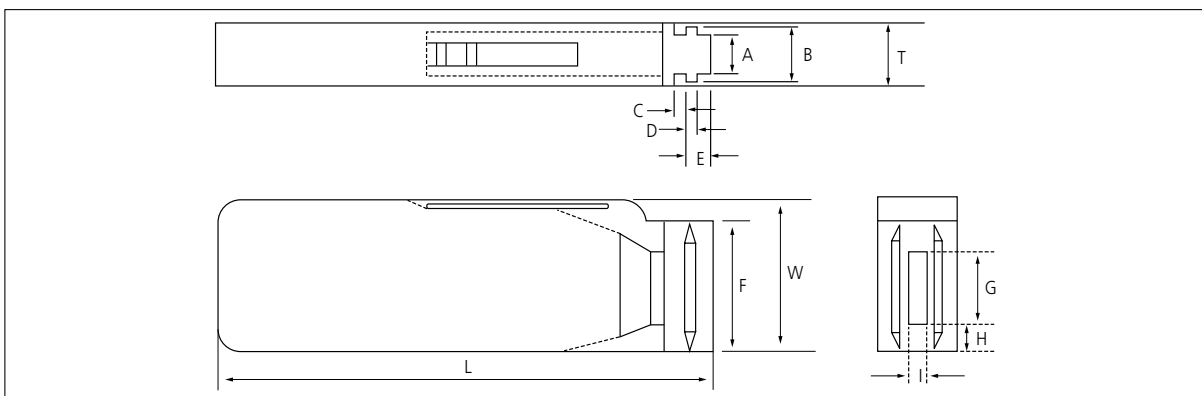

Unit: mm

Symbol	A	B	T	C	D	E
Dimension	6.8 ± 0.1	8.8 ± 0.1	12 ± 0.1	$1.5+0.1/-0$	$2+0/-0.1$	$3.0+0.2/-0$
Symbol	F	W	G	H	L	I
Dimension	$31.5+0.2/-0$	$36+0/-0.2$	19 ± 0.35	7 ± 0.35	110 ± 0.7	5 ± 0.35

• QUANTITY

Unit: inch(mm) and pcs

Size	0402(1005)	0603(1608)	0805(2012)	
			T=0.65mm	T=0.85mm
Quantity	50,000	10,000 or 15,000	10,000	5,000 or 10,000

1.Storage of products

1-1. Storage Environment

Tape packing materials are designed to withstand long-term storage, but they will degrade more rapidly in the presence of high temperature or high humidity. Therefore, the products must be stored in an ambient 5~40℃ with a relative humidity of 20~70%. Allowable storage period is within 6 months from the outgoing date of delivery.

1-2. Corrosive Gases

Since sulfur and chlorine may degrade the solderability of the end termination, it is important to store the capacitors in an environment free of these gases


1-3. Temperature Fluctuations

Since dew condensation may occur by the differences in temperature when the products are taken out of storage, it is important to maintain a temperature-controlled environment.

2.Design of Solder Land Pattern

When designing printed circuit boards, the shape and size of the solder lands must allow for the proper amount of solder on the capacitor. The amount of solder at the end terminations has a direct effect on the probability that the chip will crack. The greater amount of solder, the larger amount of stress on the chip, and the more likely that it will break. Use the following illustrations as guidelines for proper Solder land design.

Recommendation of solder Land Shape and Size

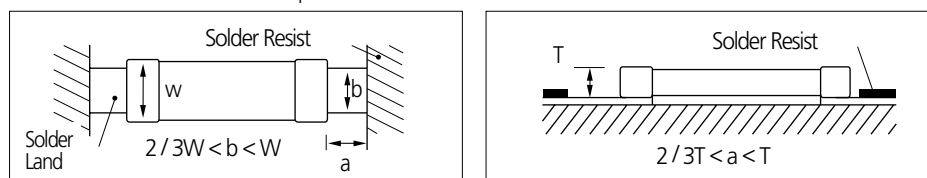

3.Adhesives

MLCCs generally require the use of an adhesive to position the chips to the circuit board prior to soldering.

3-1. Requirements for Adhesives

They must have enough adhesion so that the chips will not fall off or move during the handling of the circuit board.

They must maintain their adhesive strength when exposed to soldering temperatures.

They should not spread or run when applied to the circuit board.

They should have a long pot life.

They should harden quickly.


They should not corrode the circuit board or chip material.

They should be a good insulator.

They should be non-toxic, and not produce harmful gases, nor be harmful when touched.

3-2. Application Method

It is important to use the proper amount of adhesive. Too little will cause poor adhesion to the circuit board, and too much may strain the conductor pattern, thereby causing defective soldering. The following illustrations show the proper quantity of adhesive.

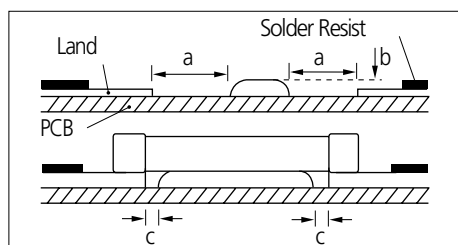

Unit: mm		
Type	21	31
a	0.2min	0.2min
b	70~100 μm	70~100 μm
c	>0	>0

3-3. Adhesive hardening Characteristics

To prevent oxidation of the terminations, the adhesive must harden at 160℃ or less, within 2 minutes or less.

Part Numbering
System

General
Capacitors

Ultra High
Capacitors

Super Small
Capacitors

High Voltage
Capacitors

Camera Strobe
Circuit Capacitors

Array Type
Capacitors

Low ESL
Capacitors

Reliability Test
Condition

Premium Capacitors
for Automotive
Applications

Packaging
Specification

Application Manual
for Surface Mounting


4. Mounting

4-1. Mounting Head Pressure

Excessive pressure will cause chip capacitors to crack. The pressure between nozzle and chip capacitor will be 300g maximum during mounting.

4-2. Bending Stress

Bending of printed circuit board by mounting head when double-sided circuit boards are used, chip capacitors first are mounted and soldered onto one side of the board. When the capacitors are mounted onto the other side, it is important to support the board as shown in the illustration. If the circuit board is not supported, it may bend, causing the already-installed capacitors to crack.

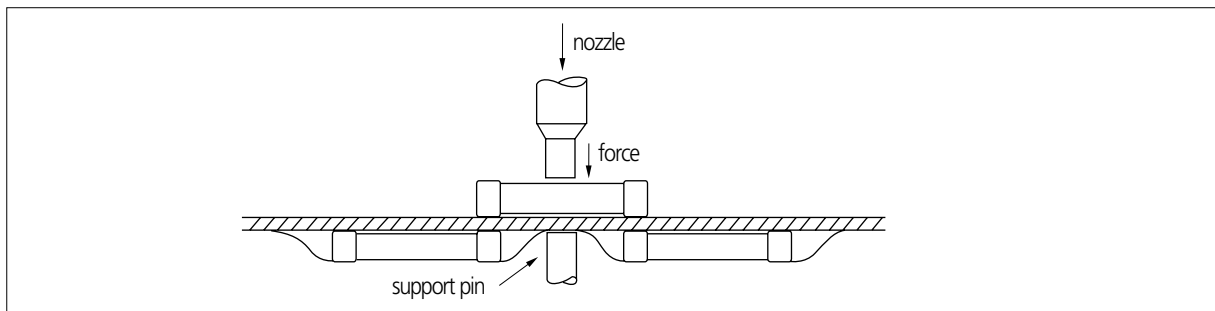

5. Flux

Although highly-activated flux gives better solderability, substances which increase activity may also degrade the insulation of the chip capacitors. To avoid such degradation, it is recommended that a mildly activated rosin flux (less than 0.2% chlorine) be used.

6. Soldering

Since a multilayer ceramic chip capacitor comes into direct contact with melted solder during soldering, it is exposed to potentially mechanical stress caused by the sudden temperature change. The capacitor may also be subject to silver migration, and to contamination by the flux. Because of these factors, soldering technique is critical.

6-1. Soldering Methods


Method	Classification	
Reflow soldering	· Overall heating	· Infrared rays · Hot plate · VPS (Vapor phase)
	· Local heating	· Air heater · Laser · Light beam
Flow Soldering	· Single wave · Double wave	

6-2. Soldering Profile

To avoid the crack problem by sudden temperature change, follow the temperature profile in the adjacent graph.


6-2-1 Pb-Free (Sn 100%) Plating

■ REFLOW SOLDERING

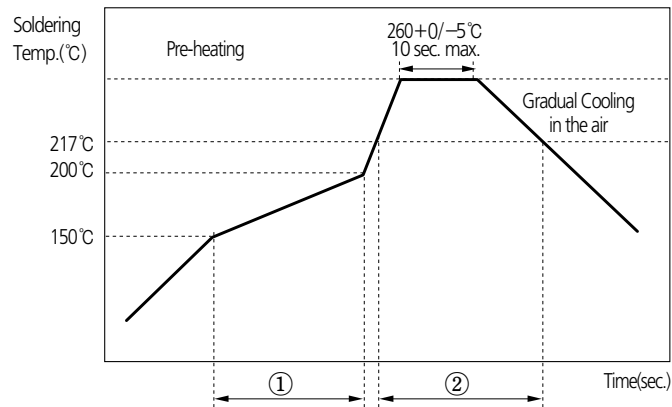

Soldering Temp. (°C)	Pre-heating Time (①, sec.)	Soldering Time (②, sec.)
260+0/-5°C	60~120	60~150

■ FLOW SOLDERING

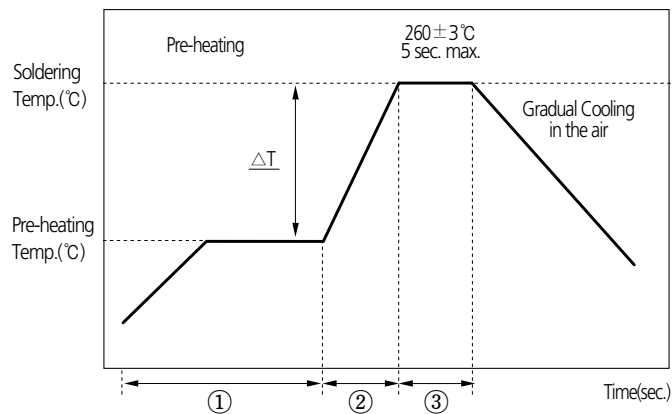

ΔT (°C)	Soldering Temp. (°C)	Pre-heating Time (①+②, sec.)	Soldering Time (③, sec.)
≤ 150 (1206 and below size)	260±3	≥ 120	≤ 5

■ SOLDER IRON(Hand Soldering)

Variation of Temp.(°C)	Soldering Temp(°C)	Pre-heating Time(sec.)	Soldering Time(sec.)	Cooling Time(sec.)	Condition of Iron Facilities		
					Wattage	Tip Diameter	Soldering Time
ΔT≤130	300±10°C max.	≥ 60 sec.	≤ 4 sec.	-	20W max.	3mm max.	4 sec max.

※ Caution - Iron tip should not contact with ceramic body directly

Part Numbering
System

General
Capacitors

Ultra High
Capacitors

Super Small
Capacitors

High Voltage
Capacitors

Camera Strobe
Circuit Capacitors

Array Type
Capacitors

Low ESL
Capacitors

Reliability Test
Condition

Premium Capacitors
for Automotive
Applications



Packaging
Specification

Application Manual
for Surface Mounting

6-3. Manual Soldering

Manual soldering can pose a great risk of creating thermal cracks in chip capacitors. The hot soldering iron tip comes into direct contact with the end terminations, and operator's carelessness may cause the tip of the soldering iron to come into direct contact with the ceramic body of the capacitor. Therefore the soldering iron must be handled carefully, and close attention must be paid to the selection of the soldering iron tip and to temperature control of the tip.

6-4. Amount of Solder

Too much Solder		Cracks tend to occur due to large stress.
Not enough solder		Weak holding force may cause bad connections or detaching of the capacitor

6-5. Cooling

Natural cooling using air is recommended. If the chips are dipped into solvent for cleaning, the temperature difference (ΔT) must be less than 100°C

6-6. Cleaning

If rosin flux is used, cleaning usually is unnecessary. When strongly activated flux is used, chlorine in the flux may dissolve into some types of cleaning fluids, thereby affecting the chip capacitors. This means that the cleaning fluid must be carefully selected, and should always be new.

7. Notes for Separating Multiple, Shared PC Boards

A multi-PC board is separated into many individual circuit boards after soldering has been completed. If the board is bent or distorted at the time of separation, cracks may occur in the chip capacitors. Carefully choose a separation method that minimizes the bending of the circuit board.

Sony Green Partner



ISO/TS 16949



ISO 14001



OHSAS18001



Quality System Certification status for each factory site

<i>Certification</i>	<i>Suwon (Korea)</i>	<i>Busan (Korea)</i>	<i>Calamba (Philippines)</i>	<i>Tianjin (China)</i>	<i>Gaoxin (China)</i>
<i>ISO / TS 16949</i>	<i>BSI TS 91430-000 [Nov.22.2010]</i>		<i>BSI TS 508248 [Aug. 16.2009]</i>	<i>BSI TS 91430-007 [Dec.04.2011]</i>	<i>BSI TS 91430-008 [Dec.04.2011]</i>
<i>TL 9000</i>	—	<i>BSI FM90588 [Sep.21.2011]</i>	—	—	—
<i>ISO 14001</i>	<i>UL 20003847 UM [Jap. 14.2011]</i>		<i>BSI EMS 77354 [Sep.05.2009]</i>	<i>CCCI 02107E10192R3L [Jul.23.2010]</i>	<i>CCCI 02109E10143R2L [Apr.27.2012]</i>
<i>OSHAS 18001</i>	<i>UL 20003847 BSOH [Jul.24.2010]</i>		<i>SGS PH08/0220 [Mar. 16.2011]</i>	<i>CCCI 02106S10146R1L [Sep.05.2009]</i>	<i>CCCI 02109S10088R2L [Apr.27.2012]</i>
<i>Sony Green Partner</i>	<i>Sony SKD5431 [May.31.2010]</i>	<i>Sony SKD5432 [May.31.2010]</i>	<i>Sony SKD5434 [May.31.2010]</i>	<i>Sony SKD5437 [May.31.2010]</i>	

Passive components Sales Office

• Head Office

206, Cheomdansaneop Road,
Youngtong-gu,
Suwon, Kyonggi Province 443-743,
Korea

Europe

Tel: +82-31-210-6328
E-mail: james.pyun@samsung.com

America

Tel: +82-31-210-6794
E-mail: randy.kim@samsung.com

Asia

Tel: +82-31-210-5348
E-mail: koogi@samsung.com

Domestic

Tel: +82-31-210-3757
E-mail: southjoy@samsung.com

• Manufacturing Site

Suwon Plant (Korea)

206 Cheomdansaneop Road,
Youngtong-gu,
Suwon, Kyonggi Province 443-743,
Korea
Tel: +82-31-210-6794
E-mail: randy.kim@samsung.com

Busan Plant (Korea)

1623-2, Songjeong-dong,
Kangseo-gu, Busan 618-270, Korea
Tel: +82-51-970-7671
E-mail: kyc.kweon@samsung.com

Tianjin Plant (China)

27, Heiniucheng-Road, Hexi District,
Tianjin, China 300210
Tel: +86-22-2830-3333(3450)
E-mail: gk.ryu@samsung.com

Philippines Plant (Philippines)

Calamba Premiere International Park,
Batino, Calamba, Laguna, Manila
Tel: +63-2-809-2873
E-mail: ksj1445@samsung.com

• Asia sales office

Shanghai Office

Rm 1408 Shanghai international
trade center No 2200 Yan an(W) RD
Shanghai China 200335
Tel: 86-21-6270-4168(274)
E-mail: dennis.cha@samsung.com

Shenzhen Office

Rm 4501, 45/F, New World Center,
Yitian Road, Futian District,
Shenzhen, China 518026
Tel: 86-755-8608-5581
E-mail: jackson.xian@samsung.com

Qingdao Office

Rm 1201, Growne Plaza Qingdao;
76XiangGangZhong Rd, Qingdao; 266071
P.R. China
Tel: 86-532-5779102
E-mail: zhengguo.cui@samsung.com

HongKong Office

Suite 4511, Two int'l Finance Centre,
8 Finance Street, Central, Hongkong
Tel: 852-2862-6350
E-mail: vinsent.chou@samsung.com

Singapore Office

3 Church Street Samsung Hub
#23-02 Singapore 049483
Tel: (65)6833-3228
E-mail: winson.yeong@samsung.com

Thai Office

Wellgrow Industrial Estate,
93 Moo 5 T. Bangsamak, A.Bangpakong
Chachoengsao 24180 Thailand
Tel: 66-38-562-026
E-mail: sbimm@samsung.com

Taiwan Office

399 9F-1, Ruey Kuang Rd., Neihu,
Taipei, Taiwan
Tel: 886-2-2656-8356
E-mail: kevin0130.wang@samsung.com

• America sales office

Irvine Office

3345 Michelson Drive,
Suite 350, Irvine, CA 92612
Tel: 1-949-797-8047
E-mail: sh386.kim@samsung.com

• Europe sales office

Frankfurt Office

Samsung haus
Am Kronberger Hang 6
D-65824 Schwalbach/Ts.
Tel: 49-6196-66-7255
FAX: 49-(0)6196-66-7755
E-mail: frank.goebel@samsung.com

Hungary Office

H2310, Szigetszentmiklos, Leshegy u.
2-4, Hungary
Tel: 36-24-551-148
E-mail: jun21c.lee@samsung.com

• Domestic Distributors

KORCHIP INC

#219-8 Gasan-dong, Gumchun-gu,
Seoul, Korea
Tel: +82-2-838-5588
E-mail: hjh0064@korchip.com

CHUNG HAN

#16-96 Hangang-lo 3, Youngsan-Gu,
Seoul, Korea
Tel: +82-2-718-3322
E-mail: bu1230choi@hanmail.net

SAMT

Daekyung Bldg., Daechi-Dong,
Gangnam-Gu, Seoul, Korea
Tel: +82-2-3458-9000
E-mail: info@isamt.com

CHUNGMAC

#53-5 Wonhyolo3 Youngsan-gu,
Seoul, Korea
Tel: +82-2-716-6428~9
E-mail: webmaster@anycam.co.kr

APEXINT

Room #905, C-dong Woorimlion's,
Valley 371-28, Gasan-dong,
Guemcheon-Gu, Seoul, Korea
Tel: +82-2-2026-2610(2)
E-mail: info@apexint.co.kr